

NYLO-6
 6" Onyx Cylinder

Source: 12W or 17.5W LED
 750lm or 1200lm

PRODUCT DESCRIPTION

6" Architectural grade LED Cylinder with Bluetooth technology built-in. Smart RGBW LED allows end user to change the color temperature from 2700K to 4000K with the touch of a button, or choose any color on the spectrum by smartphone with ControlLIT™ app.

FEATURES

- Internal thermal protection
- 750 or 1200 Lumens
- 2700K, 3000K, 3500K, 4000K or 5000K
- 90+ CRI
- 5 Year Limited Warranty
- cULus listed for damp location
- cULus listed for wet location - Wall Mount Only
- 50,000 Hr Life Expectancy

CONSTRUCTION

Cylinder Cap: High quality 0.040" steel cap with universal slots to allow for direct mounting to J-Box for surface mount. Incorporates all thread in the center for the installation of a cable or pendant rod kit for the corresponding mounting method. Three screws on the bottom of cap secure cylinder body to cylinder cap. (Adjustable with flathead screw drive)

Cylinder Body: 0.040" steel cylindrical body with three keyhole slots allowing body to be installed to cylinder cap. Spring brackets accept torsion wing trim springs. Four butterfly clips also accommodated for spring-less trims.

Mounting: Cable mount come with canopy, field cuttable 3 wire cable and cylinder. Rod mount comes with canopy and rod consisting of 3-12" pieces and 2-24" pieces of internally threaded rod and cylinder. Surface mount and wall mount come with hardware to mount directly to J-box.

Socket / Quick Connector: Socket is free floating and installs to eyeball, gimbal ring and new trims equipped with socket brackets. Protective cap included to protect socket interior during ceiling painting.

ELECTRICAL

Input Voltage: 120V

Lumens / Wattage: 750lm / 12W or 1200lm / 17.5W

Color Temperature: 2700K, 3000K, 3500K, 4000K or 5000K

Color Rendering Index: 90+ CRI

FINISHES

White.

LISTINGS AND WARRANTY

- cULus Listed for Damp Locations
- 5-Year Limited Warranty



PRODUCT IMAGES & DIMENSIONS

FOUR MOUNTING STYLES



Cable Mount




Pendant Stem Mount



Surface Mount



Wall Mount

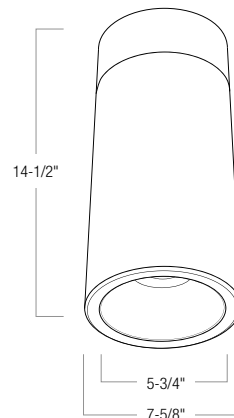

6" Onyx LED Cylinder

Family	Lumen / Wattage	Trim Type	Color Temp	Trim Finish	Cylinder Finish	Input Voltage	AC Cable
NYLO-6C Cable	075 750lm / 12W	1 Reflector	27 2700K	WW White / White	B Black	120V	AC Aircraft cable for cable mount only
NYLO-6P Pendant	12 1200lm / 17.5W	2 Reflector for Deco Glass	30 3000K		W White		
NYLO-6S Surface			35 3500K				
NYLO-6W Wall Mount			40 4000K				
			50 5000K				

Example: NYLO-6P12130WWW = 6" Onyx LED Cylinder, Pendant Mount, 1200lm / 17.5W, White Reflector / White Flange, White Cylinder, 120V input