

NEX-711-LED

LED Exit and Emergency Combination with Remote Capability and Self-Diagnostics

Type
Project
Catalog No.
Notes

PRODUCT DESCRIPTION

Luminaire combines exit and emergency lighting to provide 90 minutes of light from two adjustable heads for illuminating paths of egress upon failure of normal power. Unit includes a battery to power additional remote emergency lights. Self-diagnostic testing automatically monitors and tests fixture to ensure proper operation.

FEATURES

- 120/277VAC dual voltage operation
- Injection-molded thermoplastic housing with 5VA flame retardant
- Double face configuration
- Two fully adjustable glare-free light heads
- Test switch and charge rate indicator
- Self-Testing and diagnostics
- Remote capability with 3.6V 3W NiCad battery
- Replaceable directional chevron inserts are easily removed and reinserted
- Red letters with 6" height and 3/4" stroke
- 24-hour recharge time after 90 minutes discharge
- Suitable for wall mounting, ceiling mounting, and side mounting
- Suitable for Damp Locations

CONSTRUCTION

Injection-molded thermoplastic ABS housing. Plastic enclosure with 5VA flame retardant. Quick connector design for easy installation. Two fully adjustable glare-free round heads for emergency lighting.

ELECTRICAL

Voltage: 120/277VAC input

Lumens / Wattage: (2) 75lm / 1W

Color Temperature: 6000K

Operating Temperature: 10°C to 40°C

Battery: NiCad 3.6V 3W maintenance-free

REMOTE CAPABILITY

Luminaire includes a 3.6V / 3W battery to power an additional remote emergency light. Upon power failure, battery requires 24 hours to recharge.

MOUNTING

Suitable for wall mounting, ceiling mounting, and side mounting. Housing snaps to canopy with a simple twist and lock.

LABELS AND LISTINGS


- Suitable for Damp Location
- cULus Listed and meets or exceeds all requirements in NFPA 70, NFPA 101 life safety code



PRODUCT IMAGES AND DIMENSIONS



NEX-712-LED/RB
Red Letters

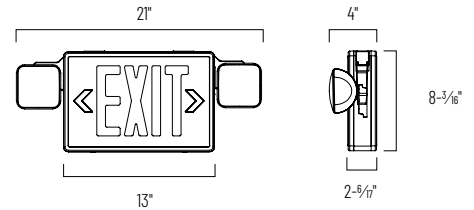

LED Exit and Emergency Combination with Adjustable Heads

Description

NEX-711-LED/G = Green Letters / White Housing (Discontinued, direct replacement: [NEX-712-LED/G](#))

NEX-711-LED/GB = Green Letters / Black Housing (Discontinued, direct replacement: [NEX-712-LED/GB](#))

NEX-711-LED/R = Red Letters / White Housing (Discontinued, direct replacement: [NEX-712-LED/R](#))

NEX-711-LED/RB = Red Letters / Black Housing

Example: **NEX-711-LED/RB** = LED Exit and Emergency Combination with Adjustable Heads, Red Letters / Black Housing