

# Installation Instructions

NPRLV-4RSL

## 4" Pearl 12V LED Adjustable Slot Aperture Retrofit

**READ PRIOR TO ATTEMPTING INSTALLATION**  
**ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION**  
**INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN**

- ⚠ **WARNING:** Risk of fire or electric shock. Installation of this retrofit assembly requires a person familiar with the construction and operation of the luminaire's electrical system and the hazard involved. If not qualified, do not attempt installation. Contact a qualified electrician.
- ⚠ **WARNING:** Risk of fire or electric shock. Install this kit only in the luminaires that has the construction features and dimensions shown in the photographs and/or drawings.
- ⚠ **WARNING:** To prevent wiring damage or abrasion, do not pinch or damage expose wiring during installation. Keep away from to edges of sheet metal or other sharp objects
- ⚠ **WARNING:** Risk of fire or electric shock. Do not alter, relocate, or remove wiring, lampholders, power supply, or any other electrical component.


- ⚠ **AVERTISSEMENT:** Risque d'incendie ou de choc électrique. L'installation de cet ensemble de rénovation nécessite une personne familiarisée avec la construction et le fonctionnement du système électrique du luminaire et les risques encourus. S'il n'est pas qualifié, n'essayez pas d'installer. Contacter un électricien qualifié.
- ⚠ **AVERTISSEMENT:** Risque d'incendie ou de choc électrique. Installez ce kit uniquement dans les luminaires qui ont les caractéristiques de construction et les dimensions indiquées sur les photographies et / ou les dessins.
- ⚠ **AVERTISSEMENT:** Pour éviter d'endommager ou d'abrasion le câblage, ne pas pincer ou endommager le câblage pendant l'installation. Tenir à l'écart des bords de la tôle ou d'autres objets tranchants
- ⚠ **AVERTISSEMENT:** Risque d'incendie ou de choc électrique. Ne modifiez pas, ne déplacez pas ou n'enlevez pas le câblage, les douilles de lampe, l'alimentation électrique ou tout autre composant électrique.

**DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.**

**THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION.**




### PACKAGING CONTENTS



Trim



LED Lamp Replacement Marking Sticker



Pearl LED module/retrofit kit Flood optic (NIO-REFL60) installed



Spot Optic (NIO-REFL25)



Narrow Flood Optic (NIO-REFL38)




### HOUSING DIMENSIONS

Refer to correlation label of luminaire and/or specification sheet at [www.NoraLighting.com](http://www.NoraLighting.com)


Install this kit only in luminaires that have the construction features and dimensions described in these instructions, and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.

**Max. Number of 12AWG through branch wiring: 6**

Housing Dimensions	
Width	4.03"
Height	5.5"



New Construction



Remodel

# Installation Instructions

NPRLV-4RSL


4" Pearl 12V LED Adjustable Slot Aperture Retrofit

READ PRIOR TO ATTEMPTING INSTALLATION  
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION  
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN


## INSTALLING DESIRED OPTIC

NOTE: FLOOD OPTIC IS PRE-INSTALLED


1 Pull pre-installed flood optic from heat sink.



2 Align desired optic to module and push the optic into place.

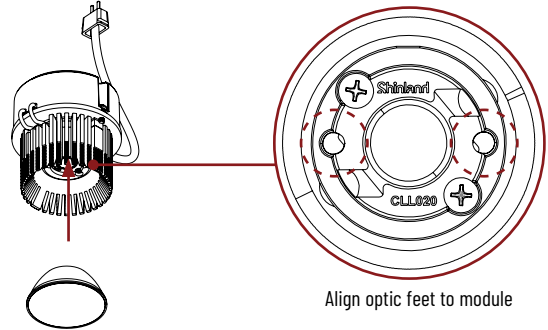


3 Attach LED module/driver and optic onto trim by threading heatsink.

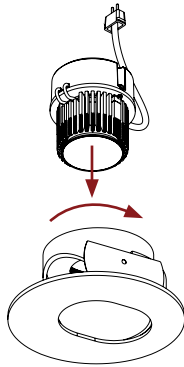

## RETROFITTING INTO 12V MR16 GU5.3 HOUSING

⚠️ TURN OFF MAIN POWER BEFORE INSTALLATION

1 Remove existing trim and light bulb from the recessed housing to reveal the MR16 GU5.3 socket. Place provided LED Lamp Replacement Marking Sticker inside the housing where visible to installer. Then connect the MR16 GU5.3 adapter into the socket.



2 Insert luminaire into housing to complete installation.

