

Installation Instructions

NUDA

120V Adjustable LEDUR Under Cabinet with Selectable CCT


READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ FIRE/ELECTRICAL HAZARD: INSTALL ACCORDING TO NATIONAL ELECTRIC CODE AND ANY APPLICABLE MUNICIPAL CODE REQUIREMENTS. - This equipment is intended to be installed only by qualified personnel. The installation must be made in accordance with the current edition to the National Electric Code and all applicable state and local building codes. The final installation must be approved by the appropriate qualified electrical/building inspector(s). Improper installation may result in a fire or electrical hazard. Be sure the electrical power to the circuit has been disconnected before installing this electrical system.

⚠ RISQUE D'INCENDIE / D'ÉLECTRICITÉ: INSTALLER SELON LE CODE ÉLECTRIQUE NATIONAL ET TOUTES LES EXIGENCES RELATIVES AU CODE MUNICIPAL APPLICABLE. - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et de tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.




PACKAGING CONTENTS




Luminaire



(2) Screw Covers



(2) Drywall Anchors



(1) End-to-End Connector




(1) 3/8" Conduit Fitting

WIRING LOCATIONS


Luminaire can be wired in three different locations.

- 1/2" Knockouts on the back or bottom of luminaire
- Access door on the back of luminaire
- Input electrical port on the side of luminaire

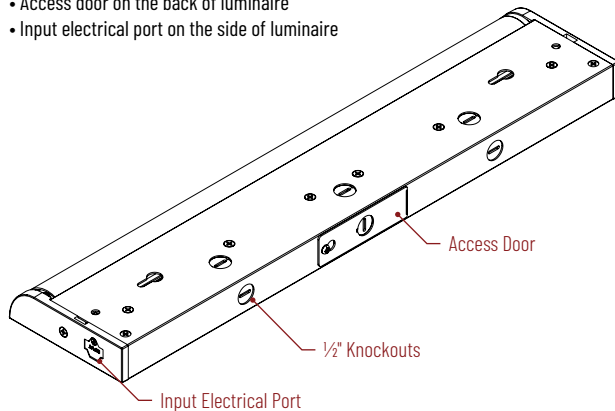


ELECTRICAL PORTS


Luminaires have dedicated "INPUT" and "OUTPUT" electrical ports for connection to power cord, jumper cable or end-to-end connector.



Input Electrical Port



Output Electrical Port

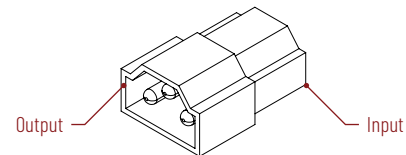


(included with luminaire)

SELECTING COLOR TEMPERATURE

CCT Switch allows color temperature to be changed from 2700K, 3000K, 3500K, 4000K or 5000K.

Note: NUDA-10TW does not have USB ports. USB charging performs best with a direct line/neutral connection. While it can also be used with a dimmer, charging performance is optimized when the dimmer is set to full output.

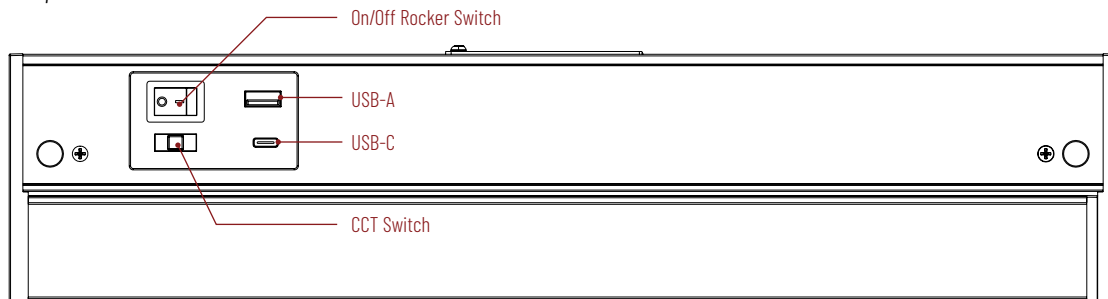

Installation Instructions

NUDA


120V Adjustable LEDUR Under Cabinet with Selectable CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

WIRING OPTIONS

A. CORD & PLUG


Loosen screw, remove cover from INPUT electrical port and connect cord and plug.

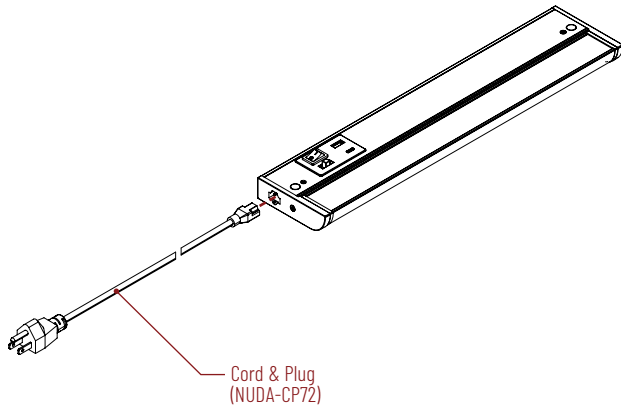

REQUIRES: NUDA-CP72 (Ordered Separately)


B. ACCESS DOOR WIRING

1. Loosen set screw on access door and remove the door from keyhole slot.
2. Assemble $\frac{3}{8}$ " die-cast connector (included) to the access door and supply the input cables through the die-cast connector.
3. Connect supply wires to luminaire's push-in connectors inside luminaire.
4. Replace access door and tighten set screw.

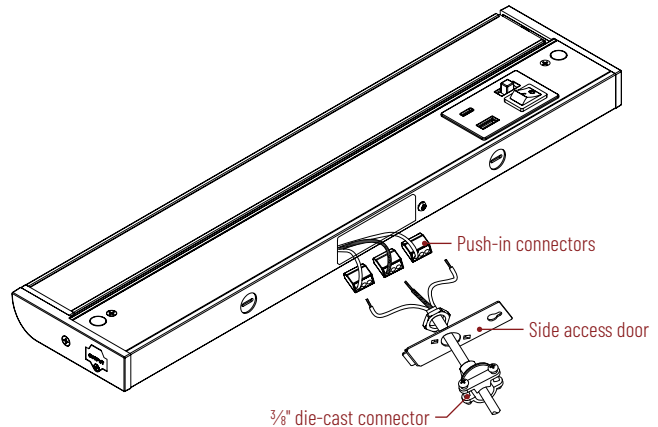

C. FRONT COVER REMOVAL

Luminaire includes (2) screws on the front cover. Gently pry open the cover with a flat head screw driver. $\frac{1}{2}$ " knockouts can be accessed to make electrical connections. Keyhole slots are available for mounting options.

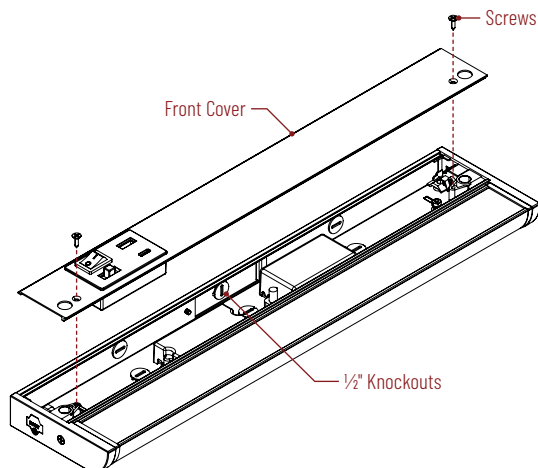

Installation Instructions

NUDA

120V Adjustable LEDUR Under Cabinet with Selectable CCT


READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

INSTALLATION INSTRUCTIONS

1.A

MOUNTING SCREW INSTALLATION:


Place luminaire in desired position and drive captive screws into surface (drywall anchors are included, if needed). Replace screws covers over captive screws.

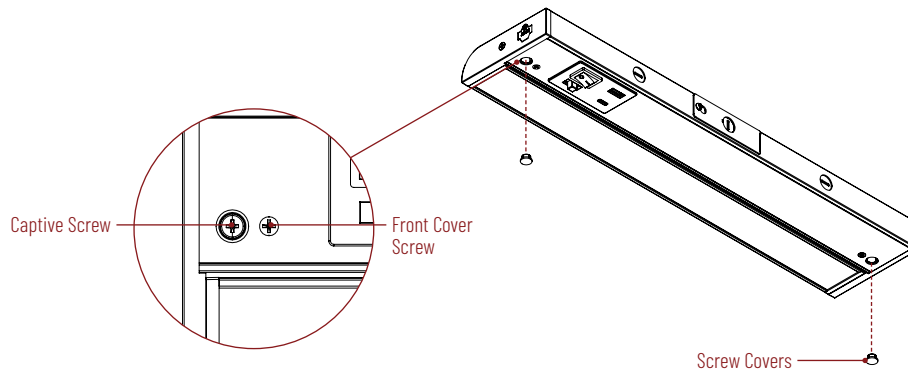

1.B


KEYHOLE MOUNT INSTALLATION:

Luminaire includes two keyhole slots on bottom. Remove front cover if necessary.

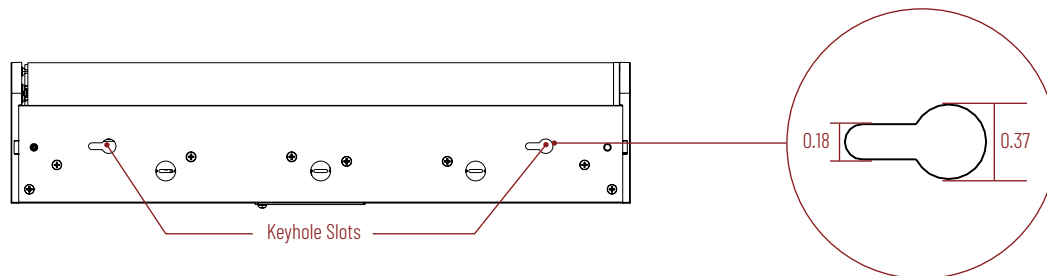

2

Remove film from lens, and installation is complete.

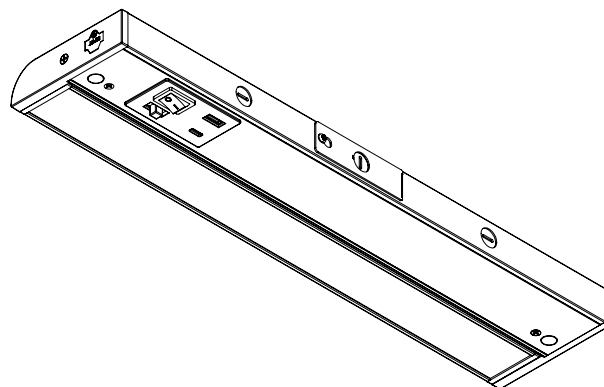

Installation Instructions

NUDA


120V Adjustable LEDUR Under Cabinet with Selectable CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

CONTINUOUS RUN INSTALLATION

1

Loosen screws and remove desired electrical port covers.

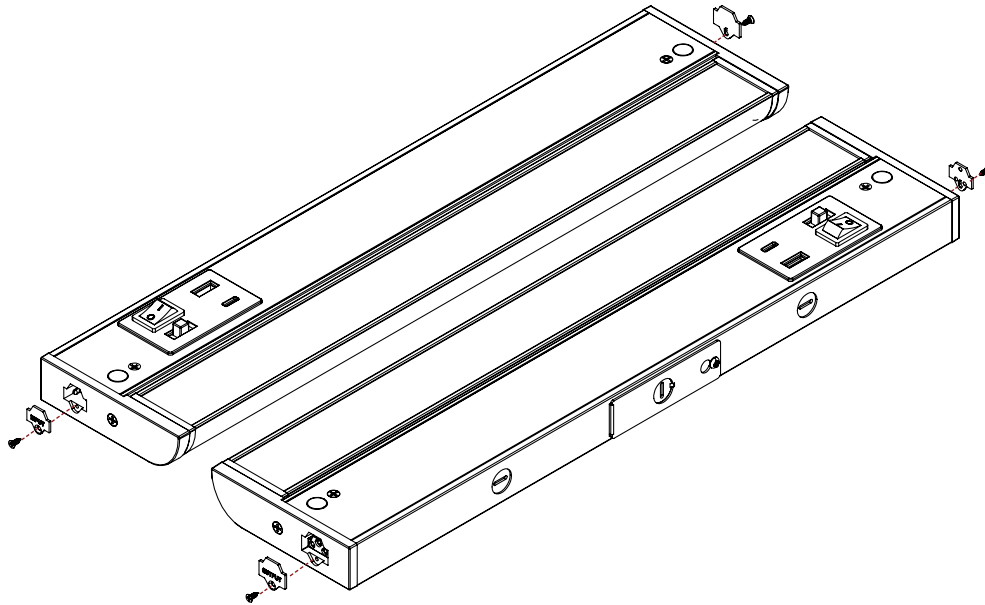

2

Connect the end-to-end connector (included) or a jumper cable (sold separately) from the output port to the input port on the next luminaire to create a daisy-chain.

