

Installation Instructions

NARGBW-977

RGBW Remote Control for Controller(s) (NARGBW-975)

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ IMPORTANT - This equipment is intended to be installed only by qualified personnel. The installation must be made in accordance with the current edition of the National Electrical Code and all applicable state and local building codes. The final installation must be approved by the appropriate, qualified electrical/building inspector(s). Improper installation may result in a fire or electrical hazard. Be sure the electrical power to the circuit has been disconnected before installing this electrical system.

⚠ IMPORTANT - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et à tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.

SAFETY INFORMATION

1. Read all instructions carefully before you begin this installation.
2. When installing the battery, pay attention to the battery's positive and negative polarity.
To save battery life, remove the batteries if remote will not be used for long period of time.
If remote becomes unresponsive and requires a shorter distance between controller, replace both batteries.
3. If controller does not respond to remote, pair remote and controller again.
4. Handle remote control with care and avoid dropping.
5. For indoor and dry location use only.


REMOTE CONTROL KEY FUNCTION

LED INDICATOR
Green = Scene saved / replaced
Blue = Button pressed / signal sent
Red = Lights are off / signal not sent

COLOR CHANGING MODE
Press to change color changing mode

BRIGHTNESS / SPEED ADJUSTMENT
Static Colors (RGB):
Press to change brightness level in 10 increments.
Hold to change brightness level in 256 increments.
Color Changing Mode:
Press to change speed level in 10 increments.
Hold to change back to default speed.

SCENES
Press to recall saved scene.
Hold to save and replace current scene

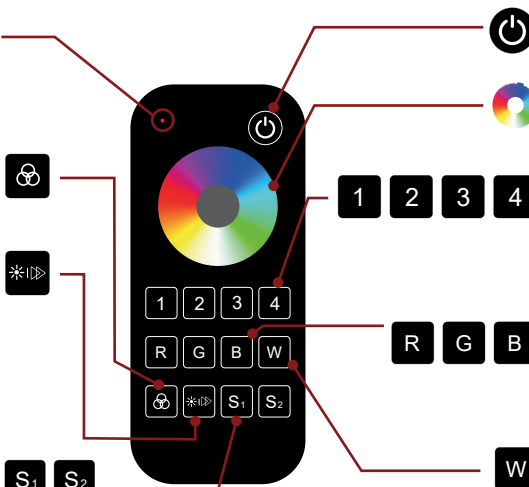

POWER ALL ON / OFF
Press to Turn On all Controllers (1 to 4)

RGB COLOR SLIDER
Touch and slide to change the color of selected controller.

ZONE SELECTION
Press to Turn On selected zone number.
Hold to Turn Off selected zone number.
Select multiple zones by pressing each number simultaneously.

STATIC RGB COLORS
Press to get red (R), green (G) or blue (B) color.
Hold to adjust RGB brightness continuously.

WHITE 3000K LED
Press to turn on / off the dedicated 3000K LED
Hold to adjust brightness level of 3000K LED

PAIRING / UNPAIRING TO CONTROLLER(S) (SOLD SEPARATELY)

REQUIRES: NARGBW-975 (Ordered Separately)

PAIR USING "MATCH" BUTTON

1. Press "Match" button on controller then press desired zone number to pair.
2. Controller's indicator light will blink five times when pair is successful.

UNPAIRING USING "MATCH" BUTTON

1. Hold "Match" button on controller for five seconds to delete all paired remotes. Controller's indicator light will blink five times when unpaired.

MOUNTING BRACKET

Optional mounting bracket and screws are included to hold remote control.



INSTALL BATTERIES

1. Slide cover to open battery compartment.
2. Insert batteries in correct direction
3. Replace cover.

