


| |
|--------------|
| Type |
| Project |
| Catalog No. |
| Lamp/Wattage |

NL-672
Regressed Gimbal with Baffle

TRIM DIMENSIONS

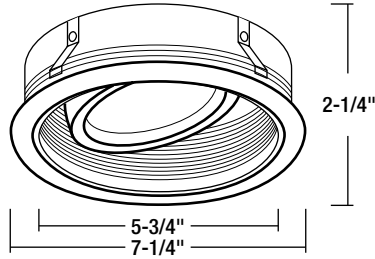

Trim OD: 7-1/4"
 Aperture: 5-3/4"
 Height: 2-1/4"

FEATURES

Trim
 Precision spun 0.040 baffle with deep grooves to reduce aperture glare. Metal trim with gimbal ring can be rotated 358° and adjusted up to 35°. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting
 Trim includes four trim clips to mount trim securely to housing.

Wiring
 Trim includes terminal block with 6-1/2" spade connectors for AR111 or PAR36 lamp. Simply cut MR16 lead wires and connect into open terminal block slots. Replacement terminal block with spade connectors are available (NRA-6003).

Compatible Housings
 Compatible with Low Voltage housings and Low Voltage retrofit kit. See individual specification sheets for more information.

Lamp
Low Voltage
 50W 12V AR111 (NLIC-601 Series; NL-601 Series; NLR-604 Series)
 50W 12V PAR36 (NLIC-601 Series; NL-601 Series; NLR-604 Series)
Low Voltage Retrofit Kit
 50W 12V AR111 (NLK-2636)
 50W 12V PAR36 (NLK-2636)

Labels and Listings
 cULus Listed for Damp Location when used with compatible housing.

Compatible Housings

| LOW VOLTAGE | | |
|--------------------------|--|--------------------------------|
| Item Number | Installation Type | Dimensions |
| NL-601Q | Non-IC New Construction - 120V Magnetic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/277Q | Non-IC New Construction - 277V Magnetic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/1EL | Non-IC New Construction - 120V Electronic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/2EL | Non-IC New Construction - 277V Electronic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/75Q | Non-IC New Construction - 120V Magnetic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/277/75Q | Non-IC New Construction - 277V Magnetic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/75/1EL | Non-IC New Construction - 120V Electronic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NL-601/75/2EL | Non-IC New Construction - 277V Electronic | W: 7-1/2" L: 12-1/2" H: 7-1/2" |
| NLIC-601QAT | IC Air-Tight New Construction - 120V Mag. | W: 9-1/2" L: 13-1/8" H: 7-3/4" |
| NLIC-601/1EL | IC Air-Tight New Construction - 120V Elec. | W: 9-1/2" L: 13-1/8" H: 7-3/4" |
| NLIC-601/2EL | IC Air-Tight New Construction - 277V Elec. | W: 9-1/2" L: 13-1/8" H: 7-3/4" |
| NLR-604Q | Non-IC Remodel Housing - 120V Magnetic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/277Q | Non-IC Remodel Housing - 277V Magnetic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/1EL | Non-IC Remodel Housing - 120V Electronic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/2EL | Non-IC Remodel Housing - 277V Electronic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/75Q | Non-IC Remodel Housing - 120V Magnetic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/277/75Q | Non-IC Remodel Housing - 277V Magnetic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/75/1EL | Non-IC Remodel Housing - 120V Electronic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| NLR-604/75/2EL | Non-IC Remodel Housing - 277V Electronic | W: 6-1/4" L: 14-1/2" H: 7-1/2" |
| LOW VOLTAGE RETROFIT KIT | | |
| NLK-2636 | Non-IC - 120V Magnetic | W: 4-1/2" L: 4-3/4" H: 5-1/8" |

Regressed Gimbal with Baffle

- NL-672B: Regressed Gimbal with Black Baffle and White Plastic Ring
- NL-672N: Regressed Gimbal with Natural Metal Baffle and Natural Metal Ring
- NL-672W: Regressed Gimbal with White Baffle and White Plastic Ring