

# NEW PRODUCT ANNOUNCEMENT


**NORA**  
LIGHTING

## IOLITE CAN-LESS Specification Grade Downlights No Housing Needed!

Award winning Iolite small aperture LED downlights are now available without any recessed housings. Simply cut the ceiling, wire the junction box and insert the luminaire in the ceiling cavity. IC Air-Tight rated luminaires are available in round or square apertures in a variety of styles and finishes. Available in three aperture sizes and up to 1250 lumens in dedicated color temperatures.


### FEATURES

- No housing required - IC Air-Tight rated
- Easy installation for remodel or new construction applications
- Components ordered a la carte (three part system)
- Three aperture sizes (1", 2" and 4") with a variety of trim types
- Same appearance as standard Iolite trim from below the ceiling
- 900lm to 1250lm LED packages
- 2700K, 3000K, 3500K, 4000K or Comfort Dim at 90+ CRI
- Field changeable optics included with LED modules
- 120V input; Triac or ELV dimming
- 5-year limited warranty
- cULus Listed for Wet Location
- Certified to the requirements of California Title 24 JA8-2022

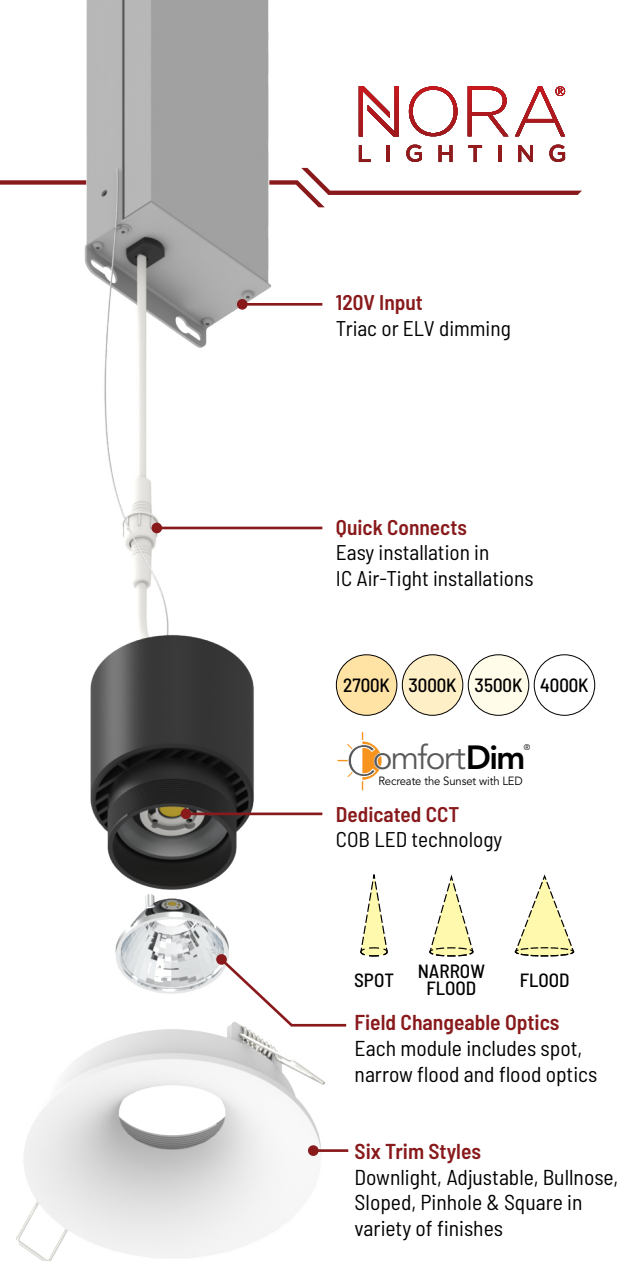

# IOLITE CAN-LESS ORDERING MATRICES

## Remote Drivers

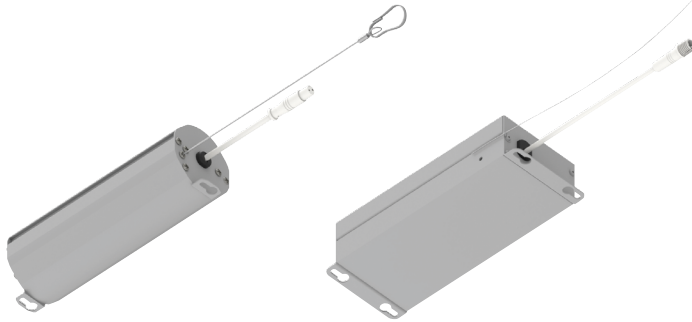

**NJCB-09**  
1" Remote Driver

**NJCB-12**  
2" & 4" Remote Driver

IOLITE CAN-LESS REMOTE DRIVERS	
PART NUMBER	DESCRIPTION
<a href="#">NJCB-09</a>	9W Driver Box for 1" Iolite Can-less
<a href="#">NJCB-12</a>	12W Driver Box for 2" & 4" Iolite Can-less
Input Voltage: 120VAC Dimming: Triac or ELV Includes 7" quick connect for easy connection to compatible LED module	

## LED Modules




**NIOC-1LED**  
1" 900lm LED Module

**NIOC-24LED**  
2" & 4" 1250lm LED Module

IOLITE CAN-LESS LED MODULES		
PART NUMBER	DESCRIPTION	CCT
<a href="#">NIOC-1LED</a>	900lm LED Module for 1" Iolite Can-less	<b>927X</b> 2700K
<a href="#">NIOC-24LED</a>	1250lm LED Module for 2" & 4" Iolite Can-less	<b>930X</b> 3000K
		<b>935X</b> 3500K
		<b>940X</b> 4000K
		<b>9CDX</b> Comfort Dim
Input Voltage: 36VDC (requires compatible remote driver) Color Rendering Index: 90+ CRI Includes three field changeable optics (optional frosted and TIR available)		

## Trims

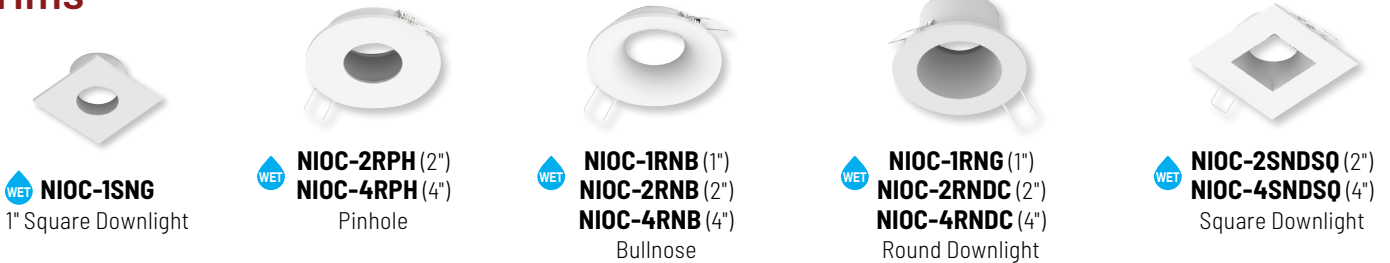

**NIOC-1SNG**  
1" Square Downlight

**NIOC-2RPH (2")**  
**NIOC-4RPH (4")**  
Pinhole

**NIOC-1RNB (1")**  
**NIOC-2RNB (2")**  
**NIOC-4RNB (4")**  
Bullnose

**NIOC-1RNG (1")**  
**NIOC-2RND (2")**  
**NIOC-4RND (4")**  
Round Downlight

**NIOC-2SND (2")**  
**NIOC-4SND (4")**  
Square Downlight



**NIOC-4RSP (4")**  
Round Sloped Downlight



**NIOC-4RSLA (4")**  
Round Slot Adjustable

IOLITE CAN-LESS TRIMS			
PART NUMBER	TRIM TYPE	FINISH	
<a href="#">NIOC-1</a> 1" Trim	<b>RNB</b> Round Bullnose	<b>HW</b>	Haze / White
	<b>RNG</b> Round Downlight	<b>MPW</b>	Matte Powder White
	<b>SNG</b> Square Downlight	<b>WW</b>	White
<a href="#">NIOC-2</a> 2" Trim <a href="#">NIOC-4</a> 4" Trim	<b>RNB</b> Round Bullnose	<b>HW</b>	Haze / White
	<b>RPH</b> Round Pinhole	<b>MPW</b>	Matte Powder White
	<b>RND</b> Round Downlight	<b>WW</b>	White
	<b>SND</b> Square Downlight		
<a href="#">NIOC-4</a> 4" Trim	<b>RSLA</b> Round Slot Adjustable	<b>BB</b>	Black (4RSP only)
	<b>RSP</b> Sloped Downlight	<b>HZMPW</b>	Haze / MPW (4RSLA only)
		<b>MPW</b>	Matte Powder White