

NTM-57W/M1

6" PAR38 Specular White Reflector with Adjustable Gimbal

Type _____

Project _____

Catalog No. _____

Notes _____

FEATURES

Trim: Precision spun 0.050 aluminum high grade specular reflector with adjustable gimbal ring and white metal ring. Adjustable gimbal ring can be adjusted up to 20°.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount lamp into gimbal ring.

Note: Requires trims clips when used with Non-IC housings (NRA-92)

COMPATIBLE HOUSINGS

Compatible with line voltage housings. See individual specification sheets for more information.

LAMP

Line Voltage:


· 100W PAR38 Maximum (NHIC-17/100DWQA)

LABELS AND LISTINGS

cULus Listed for Damp Location when used with compatible housing.



PRODUCT IMAGES & DIMENSIONS

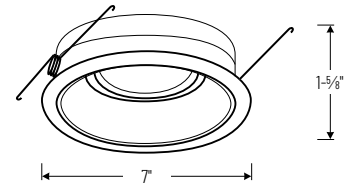

6" PAR38 Specular White Reflector with Adjustable Gimbal

Catalog No. _____
NTM-57W = 6" PAR38 Specular White Reflector with Adjustable Gimbal

Compatible Housings

Catalog No. _____
NHIC-17/100DWQA = ICAT Double Wall New Construction / 100W Max

Example: NTM-57W = 6" PAR38 Specular White Reflector with Adjustable Gimbal