

NX-503-LED / NX-504-LED / NX-603-LED

Thermoplastic LED Exit Sign

Source: 2W normal operation

3.5W emergency operation

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

BODY

- 12-1/8" Width X 8-3/4" Height X 1-3/4" Depth
- Injection-molded thermoplastic housing
- Black or white housing finish

FACE

- 6" high text with color diffusion
- Both double and a blank face are included
- Replaceable knockout directional chevrons

MOUNTING

- Wall, side, or ceiling
- Mounting hardware and canopy included

ELECTRICAL

Voltage: 120/277VAC Input

Wattage: 2W normal operation, 3.5W emergency operation

Light Source: LED

Circuit Protection: Isolated surge and short circuit protection. Disconnect for deep discharge.

OPERATION

NX-503-LED: AC only

NX-504-LED: Second circuit for input from external EPS or other alternative emergency power source or generator

NX-603-LED: Emergency battery back-up included for 90-minute emergency operation

LIFE EXPECTANCY

LED sources and PC circuitry are rated for a minimum of 25 years with no change in illumination level

ACCESSORIES

NEXL-R: Spare Red Lens


NEG-60: Wet Location Enclosure for wall mounting only

LABELS AND LISTINGS


- UL 924 Compliant
- NFPA
- NEC
- State & Municipal
- Certified to the energy efficiency standards of California Title 20



PRODUCT IMAGES AND DIMENSIONS

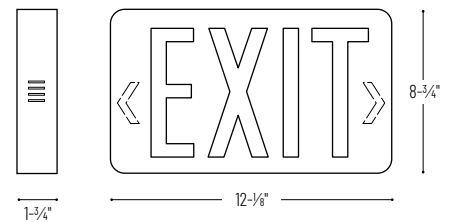

NX-503-LED / NX-504-LED / NX-603-LED
Thermoplastic LED Exit Sign



NEG-60
Wet Location Enclosure

Thermoplastic LED Exit Signs

Operation	Letter Color / Housing Color
NX-503-LED = AC only	/G = Green Letters / White Housing
NX-504-LED = 2-Circuit	/BG = Green Letters / Black Housing
NX-603-LED = Battery Backup	/R = Red Letters / White Housing
	/BR = Red Letters / Black Housing

Accessories

Description
NEXL-R = Spare Red Lens
NEG-60 = Wet Location Enclosure

Example: **NX-603-LED/R** = Thermoplastic LED Exit Sign, Battery Backup, Red Letters / White Housing