



24V COB TAPE LIGHT

High Output • 450 lumens per foot

COB LED Tape light creates an uniform seamless line of light, without the need for additional diffused covers or accessories. Producing over 450 lumens per foot in dedicated color temperatures, tape light is a perfect solution for low clearance or reflective surfaces to eliminate all glare or dotting.

FEATURES

- 24V system - requires class 2 LED driver
- Dimmable with dimmable power supply
- Seamless COB eliminates LED dotting
- Delivering over 450 lumens at 4.5W per foot
- Dedicated color temperatures (2700K, 3000K, 3500K or 4000K)
- Cutable every 1.79" and connectable with accessories
- Easy installation with 3M™ adhesive pre-installed
- cULus listed for indoor dry location (IP20 rated)
- Rolls include a 12" power cord and mounting clips
- Range of mounting accessories, drivers and connectors
- 5-year limited warranty

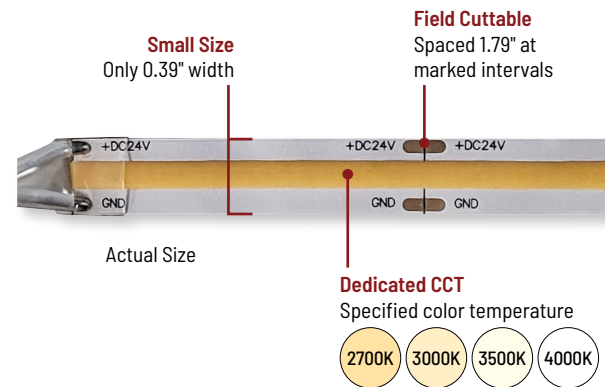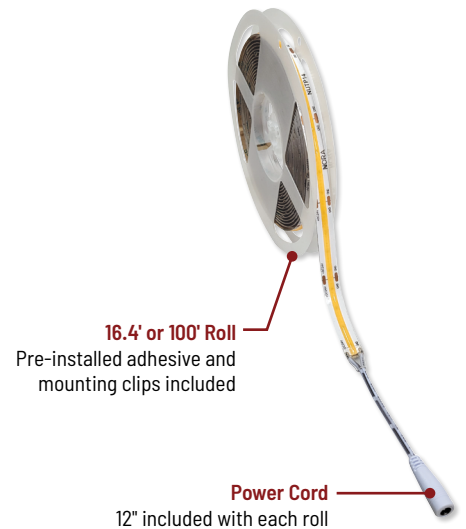

24V HIGH OUTPUT COB LED TAPE LIGHT ROLL

DESCRIPTION

NUTP14-COB24CV16-927	16.4' Roll / 2700K (includes one power cord)
NUTP14-COB24CV16-930	16.4' Roll / 3000K (includes one power cord)
NUTP14-COB24CV16-935	16.4' Roll / 3500K (includes one power cord)
NUTP14-COB24CV16-940	16.4' Roll / 4000K (includes one power cord)
NUTP14-COB24CV100-927	100' Roll / 2700K (includes one power cord)
NUTP14-COB24CV100-930	100' Roll / 3000K (includes one power cord)
NATLCB-708	12" Hardwire Power Cord
NATLCB-708/BC	6" Power Cord with Female Power Line Connector
NATL2-C23A	4' Shallow Channel w/ Wings, Aluminum finish
NATL2-C24A	4' Shallow Channel, Aluminum finish
NATL2-C25A	4' Deep Channel w/ Wings, Aluminum finish
NATL2-C26A	4' Deep Channel, Aluminum finish
NATLCB-709	Clear Mounting Clips (pack of 15)
NATLCB-707	End to End Connector
NATLCB-703	3" Linking Cable
NATLCB-706	6" Linking Cable
NATLCB-718	18" Linking Cable
NATLCB-736	36" Linking Cable
NATLCB-772	72" Linking Cable
NATLCB-L	L Connector
NATLCB-T	T Connector
NATLCB-X	X Connector

