

# NX-603-LED

Thermoplastic LED Exit Sign with Battery Backup

Source: 2W normal operation

3.5W emergency operation

Type

Project

Catalog No.

Notes

## PRODUCT DESCRIPTION

Compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

## BODY

- 12-1/8" Width X 8-3/4" Height X 1-3/4" Depth
- Injection-molded thermoplastic housing
- Black or white housing finish

## FACE

- 6" high text with color diffusion
- Both double and a blank face are included
- Replaceable knockout directional chevrons

## MOUNTING

- Wall, side, or ceiling
- Mounting hardware and canopy included

## ELECTRICAL

**Voltage:** 120/277VAC Input

**Wattage:** 2W normal operation, 3.5W emergency operation

**Light Source:** LED

**Circuit Protection:** Isolated surge and short circuit protection. Disconnect for deep discharge.

**Remote Capability:** None

## BATTERY

During loss of power, NiCad battery will operate LED exit sign for 90 minutes. Battery requires 24 hours to recharge when power is restored.

## LIFE EXPECTANCY

LED sources and PC circuitry are rated for a minimum of 25 years with no change in illumination level

## ACCESSORIES

**NEXL-R:** Spare Red Lens


**NEG-60:** Wet Location Enclosure for wall mounting only

## LABELS AND LISTINGS

- UL 924 Compliant
- NFPA
- NEC
- State & Municipal
- Certified to the energy efficiency standards of California Title 20




## PRODUCT IMAGES AND DIMENSIONS

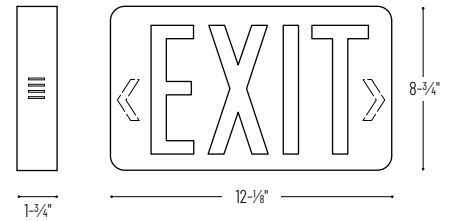

### NX-603-LED

LED Exit Sign with Battery Backup



### NEG-60

Wet Location Enclosure

## Thermoplastic LED Exit Signs

Letter Color / Housing Color

**NX-603-LED/GC** = Green Letters / White Housing (Discontinued, direct replacement: [NX-603D-LED](#))

**NX-603-LED/BG** = Green Letters / Black Housing

**NX-603-LED/R** = Red Letters / Black Housing

**NX-603-LED/BR** = Red Letters / Black Housing

## Accessories

Description

**NEXL-R** = Spare Red Lens

**NEG-60** = Wet Location Enclosure

Example: **NX-603-LED/R** = Thermoplastic LED Exit Sign, Battery Backup, Red Letters / White Housing