



Nora Flexible Rail and System Components

DESCRIPTION

Nora Rail is a line voltage (120V), 20Amp 2400 Watt system. A complete system will include rail, ceiling or wall stands, power feed and a selection of luminaires. This system can accommodate line voltage, low voltage, HID and fluorescent luminaires on the same system.

RAIL SPECIFICATION

RAIL

Extruded aluminum rail with plastic end caps. Solid, 12 gauge, 20A copper conductors. Can be field cut and field bendable.

RATING


Rated for 120V, 60Hz, 2400W, single circuit.

FINISH


Available in Brushed Nickel (BN), Bronze (BZ), pr Silver (S).

LABELS

UL Listed for indoor use.








DIMENSIONS

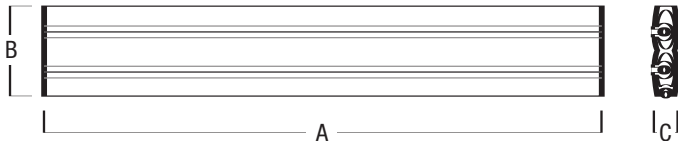

	NRS90-P04	NRS90-P06	NRS90-P08
A: Length	4' (121.9cm)	6' 6" (198.1cm)	8' (243.8cm)
B: Width	1" (26mm)	1" (26mm)	1" (26mm)
C: Depth	3/8" (9mm)	3/8" (9mm)	3/8" (9mm)

PRE-BENT RAIL *includes end caps*



CEILING / WALL SUPPORT STEM CONNECTORS



STRAIGHT CEILING SUPPORT STEMS

NRS90-N14 - 3-3/8"

NRS90-N17 - 7-1/2"-11-1/2" Adjustable

CATALOG NO.:	TYPE:
PROJECT:	
COMMENTS:	
PREPARED BY:	DATE:



STRAIGHT / SLOPED CEILING SUPPORT STEMS

NRS90-N73 - 3"

NRS90-N74 - 4"

NRS90-N77 - 8-1/4"-11-1/2" Adjustable

NRS90-N70 - 12"-24" Adjustable

NRS90-N71 - 25-1/4"-48" Adjustable


NRS90-N72 - 49-3/4"-96" Adjustable



CABLE CEILING CONNECTOR

NRS90-N91 - 10'


NRS90-N91-M1 - 20'



WALL CONNECTOR


NRS90-N18 - 5-1/2"-8-1/2" Adjustable

CONNECTORS



STRAIGHT POWER CONNECTOR

NRS90-P81



STRAIGHT NON-POWER CONNECTOR

NRS90-N89



FLEXIBLE POWER CONNECTOR

NRS90-P85



FLEXIBLE POWER CONNECTOR CABLE

NRS90-P82



LIVE X-CONNECTOR

NRS90-N02 - Use with NRS90-N70 series non-power stems



LIVE X-CONNECTOR WITH POWER STEM

NRS90-P02 - 7-1/2"-11-1/2" adjustable power stem



LIVE L-CONNECTOR

NRS90-N03 - Use with NRS90-N70 series non-power stems



LIVE L-CONNECTOR WITH POWER STEM

NRS90-P03 - 7-1/2"-11-1/2" adjustable power stem



LIVE T-CONNECTOR

NRS90-N04 - Use with NRS90-N70 series non-power stems



LIVE T-CONNECTOR WITH POWER STEM

NRS90-P01 - 7-1/2"-11-1/2" adjustable power stem

TESTING: ALL REPORTS ARE BASED ON PUBLISHED INDUSTRY PROCEDURES: FIELD PERFORMANCE MAY DIFFER FROM LABORATORY PERFORMANCE. PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




Nora Flexible Rail and System Components


POWER FEEDS



CANOPY FOR POWER SYSTEMS
NRS90-P13 - Use with power stems



SLOPED CANOPY FOR POWER SYSTEMS
NRS90-P10 - Use with power stems



WALL MOUNT POWER CANOPY
NRS90-P40

POWER STEMS

NRS90-P11 - 3"
NRS90-P14 - 4"
NRS90-P17 - 7-1/2"-11-1/2" Adjustable
NRS90-P87 - 12"-24" Adjustable
NRS90-P88 - 25-1/4"-48" Adjustable
NRS90-P89 - 49-3/4"-96" Adjustable



ROUND POWER CANOPY WITH 18" RAIL CONNECTOR
NRS90-P80 - 18" Cable, Side Exit



ROUND POWER CANOPY WITH 10"6" ADJUSTABLE RAIL CONNECTOR
NRS90-P90 - 10"6" Adjustable Cable, Center Exit



ROUND POWER CANOPY WITH RAIL CONNECTOR & SUPPORT CABLE
NRS90-P91 - 10'6" Adjustable and Support Cables, Center Exit
NRS90-P91-M1 - 20' Adjustable and Support Cables, Center Exit



POWER CORD & PLUG
NRS90-P99 - 10' Adjustable

ACCESSORIES



MR16 COLORED LENSES
NM-100/MR16 - For use with NRS90-N32, NRS11-108S.
Available in Blue, Clear, Frosted, Green, Linear, Pink, Red, Spread, and Yellow.



RAIL END CAP
NRS90-N01




LAMP REPLACEMENT TOOL
NRS90-N20 - Suction Cup Tool

T-BAR CLIPS & ASSEMBLIES


NRS90-N21 - T-bar clip and cover assembly for 15/16" T
NRS90-N22 - T-bar clip and cover assembly for 9/16" T
NRS90-N24 - Replacement t-bar clip 15/16"
NRS90-N25 - Replacement t-bar clip 9/16"



CATALOG NO.:	TYPE:
PROJECT:	
COMMENTS:	
PREPARED BY:	DATE:



MR16 DECORATIVE RING
NRS90-N31 - For use with completely exposed MR16 lamp
NRS90-N32 - with lamp spring. For use with NRS11-103, NRS11-104, NRS11-302, NRS11-310, NRS36-103, NRS36-104, NRS36-302, NRS36-310



RAIL BENDING DEVICE
NRS90-N33



GLASS SHIELDS
NRS90-N34 - Glass shield for porcelain fixtures
NRS90-N35 - Screw-in glass shield for pendants
NRA-136 - Glass shield for NRS33-901, NRS66-901
NRA-6040 - Glass shield for NRS19-201, 202, 203, 204, 474



DICHROIC FILTER
NRS90-N66 - Dichroic filter for NRS52 series




3-PRONG PLUG
NRS90-P30



TRACK ADAPTER FOR RAIL
NRS90-P31 - Allows use of track fixtures on rail




EXTENSION RODS FOR QUICKJACK
NRS90-P33 - 6"
NRS90-P34 - 12"
NRS90-P35 - 24"



RAIL CURRENT LIMITER
NRS90-P37 - with circuit breaker 1A - 14A. For use with NRS90-P11, NRS90-P14, NRS90-P17, NRS90-P87, NRS90-P88, NRS90-P90



UNIVERSAL ADAPTER
NRS90-P86 - with Cable Adjustable



MR16 HONEYCOMB
NT-362 - For use with NRS90-N32S, NRS11-108S.