

NX-606-LED

Die-Cast LED Exit Signs with Battery Backup

Source: 2.3W

Type _____

Project _____

Catalog No. _____

Notes _____

PRODUCT DESCRIPTION

Die-cast aluminum low-profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. Exit signs are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

Die-cast exit sign utilizing Light Emitting Diode (LED) modules as the primary light source for economy operation. Exit sign includes a backup NiCad battery for 90-minute operation under emergency applications where the primary power source has been interrupted or terminated.

ELECTRICAL

Voltage: 120/277VAC dual input

Wattage: 2.3W

Light Source: LED

Operating Temperature: 10°C to 40°C (50°F to 104°F)

Circuitry Protection: Short circuit protection. Brown-out protection.

Construction: Brushed, die-cast aluminum, low-profile, snap-together housing constructed of 20-gauge steel. Snap-out knockouts for wiring.

Face: Two front faces sent with the dual face unit, One face plate sent with the single face unit. 6" high text with color diffusion.

Mounting: Exit sign can be mounted on a wall, side, or ceiling (all mounting hardware included).

Battery: Replaceable NiCad battery offers 90-minute emergency operation on a fully charged battery.


Testing: High-charge / ready operation indicator light and test button.

LABELS AND LISTINGS

- [5-Year Limited Warranty](#)
- UL Listed
- NFPA
- NEC
- Certified to the energy efficiency standards of California Title 20



PRODUCT IMAGES AND DIMENSIONS

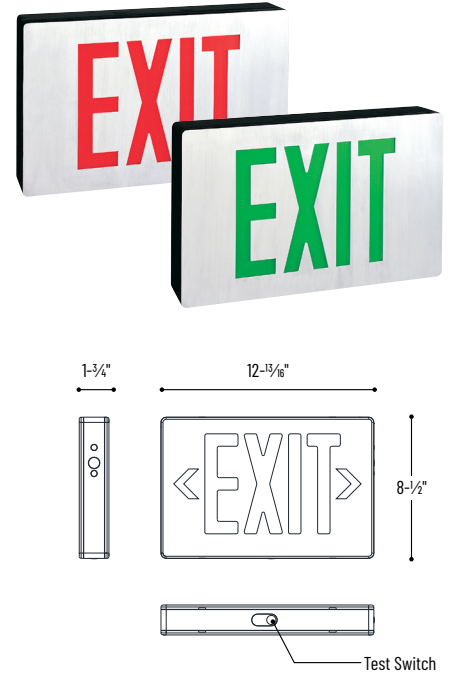

Die-Cast LED Exit Signs with Battery Backup

Letter Color / Housing Color	Faces
NX-606-LED/R = 6" Red Letters / Black Housing	(blank) = Single Face
NX-606-LED/G = 6" Green Letters / Black Housing	/2F = Double Faces

Replacement Battery

Description
NEB-NICAD6 = Replacement Ni-Cad Battery for NX-606-LED/R
NEB-NICAD7 = Replacement Ni-Cad Battery for NX-606-LED/G

Example: **NX-606-LED/R** = 6" Red Letters Die-Cast LED Exit Sign with Battery Backup, Single Face, Black Housing