

NEW PRODUCT ANNOUNCEMENT

NORA
LIGHTING

IOLITE CAN-LESS


Specification Grade Downlights

No Housing Needed!

Award winning Iolite small aperture LED downlights are now available without any recessed housings. Simply cut the ceiling, wire the junction box and insert the luminaire in the ceiling cavity. IC Airtight rated luminaires are available in round or square apertures in a variety of styles and finishes. Available in three aperture sizes and delivering over 1500 lumens in dedicated color temperatures.


FEATURES

- No housing required - IC Airtight rated
- Easy installation for remodel or new construction applications
- Components ordered a la carte (three part system)
- Three aperture sizes (1", 2" and 4") with a variety of trim types
- Same appearance as standard Iolite trim from below the ceiling
- 900lm to 1500lm LED packages
- 2700K, 3000K, 3500K, 4000K or Comfort Dim at 90+ CRI
- Field changeable optics included with LED modules
- 120V or 120-277V input; Phase or 0-10V dimming
- 5-year limited warranty
- cULus Listed for Wet Locations
- Certified to the requirements of California Title 24 JA8-2025

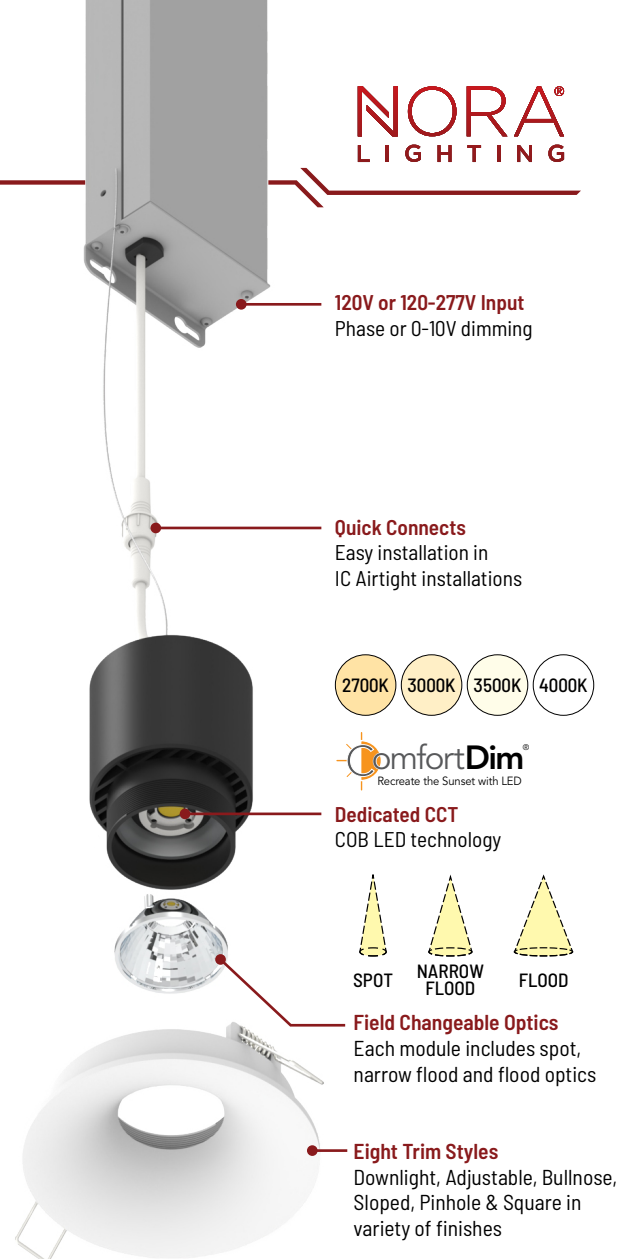

IOLITE CAN-LESS ORDERING MATRICES

Remote Drivers

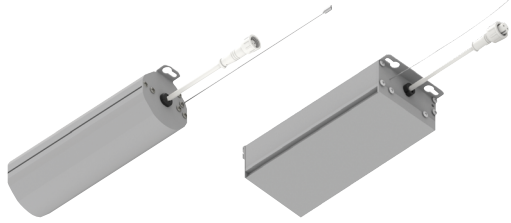

NJCB-09
1" Remote Driver

NJCB-12
2" & 4" Remote Driver

IOLITE CAN-LESS REMOTE DRIVERS

PART NUMBER	DESCRIPTION
NJCB-09	9W; 120V input; Phase dimming (1" only)
NJCB-12	12W; 120V input; Phase dimming (2" & 4")
NJCB-12LE4	12W; 120-277V; Phase or 0-10V (2" & 4")
Input Voltage: 120VAC or 120-277VAC Dimming: Phase (Triac / ELV) or 0-10V Includes 16.5" quick connect for easy connection to compatible LED module	

LED Modules




NIOC-1LED
1" LED Module

NIOC-24LED
2" & 4" LED Module

IOLITE CAN-LESS LED MODULES

PART NUMBER	DESCRIPTION	CCT
NIOC-1LED	900lm LED Module for 1" Iolite Can-less	927X 2700K
NIOC-24LED	1200lm LED Module for 2" & 4" Iolite Can-less	930X 3000K
NIOC-24LEDHL	1500lm LED Module for 2" & 4" Iolite Can-less	935X 3500K 940X 4000K
NIOC-1LED	650lm LED Module for 1" Iolite Can-less	9CDX Comfort Dim
NIOC-24LED	1000lm LED Module for 2" & 4" Iolite Can-less	
Input Voltage: 36VDC or 37VDC (requires compatible remote driver) Color Rendering Index: 90+ CRI Includes three field changeable optics (optional frosted and TIR available)		

Trims



NIOC-1SNG
1" Square Downlight



NIOC-2RPH (2")
NIOC-4RPH (4")
Pinhole



NIOC-1RNB (1")
NIOC-2RNB (2")
NIOC-4RNB (4")
Bullnose



NIOC-1RNG (1")
NIOC-2RNG (2")
NIOC-4RNG (4")
Round Downlight



NIOC-2SND SQ (2")
NIOC-4SND SQ (4")
Square Downlight



NIOC-4RSLA (4")
Round Adjustable Slot




NIOC-4RSP (4")
Round Sloped Downlight



NIOC-4RTL NDC (4")
Trimless Downlight
* Requires Mud Plate *



NIOC-4RTLSLA (4")
Trimless Adjustable Slot
* Requires Mud Plate *



NIOC-TLMR-4R (4")
Trimless Mud Plate

IOLITE CAN-LESS TRIMS

PART NUMBER	TRIM TYPE	FINISH
NIOC-1	1" Flanged Trim	RNB Round Bullnose RNG Round Downlight SNG Square Downlight BB Black HW Haze / Warm White MPW Bright White WW Warm White
NIOC-2	2" Flanged Trim	RNB Round Bullnose RPH Round Pinhole RNDC Round Downlight SND SQ Square Downlight BB Black BZ Bronze HW Haze / Warm White MPW Bright White WW Warm White
NIOC-4	4" Flanged Trim	RNB Round Bullnose RPH Round Pinhole RNDC Round Downlight RSLA Round Adjustable Slot RSP Sloped Downlight SND SQ Square Downlight BB Black BZ Bronze HW Haze / Warm White HZMPW Haze / Bright White MPW Bright White WW Warm White
NIOC-4RTL	4" Trimless * requires mud plate *	NDC Downlight SLA Adjustable BB Black BZ Bronze (NDC only) HZ Haze (NDC only) MPW Bright White
NIOC-TLMR-4R Trimless Mud Plate		