

NRMC3-61 / NRMC3-62

6" Marquise III Retrofit Downlights

Source: 12W
1000lm

| | |
|-------------|--|
| Type | |
| Project | |
| Catalog No. | |
| Notes | |

PRODUCT DESCRIPTION

The Marquise III Retrofit Series replaces existing recessed trims and light sources. Series includes Signify® COB LED with optimized beam spreads, dimmable driver and medium base socket to replace old light sources with the latest LED technology.

FEATURES

- Retrofit existing architectural or commercial housings with the latest LED technology
- Over 80% energy savings when compared to incandescent
- Signify® Fortimo COB LED technology
- Spot, narrow or flood beam spreads
- 1000lm LED package
- Dedicated CCT (27K, 30K, 35K & 40K) @ 90+CRI
- 5-year Limited Warranty

CONSTRUCTION

Reflector: Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

Mounting: Trim includes friction blades to mount trim securely to housing.

ELECTRICAL

Lumens / Wattage: 1000lm / 12W

Color Temperature: 2700K, 3000K, 3500K, 4000K

Color Rendering Index: 90+CRI

Beam Spread: Spot, Narrow Flood, Flood

Operating Temperature: 0°C to 30°C

Lifetime: 50,000 hours @ L70

Dimming: Dimmable down to 10% with Triac or ELV

Click Here or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

COMPATIBLE HOUSINGS

Marquise retrofit downlights are compatible with most 6" IC and Non-IC housings by Nora Lighting and others.

FIRE BOX

- NFBIC-6INCATA** 6" ICAT Fire Box
- NFBIC-6LMRATA*** 6" ICAT Dedicated LED Fire Box

NEW CONSTRUCTION

- NHIC-6LMRAT*** 6" ICAT Dedicated LED
- NHIC-6LMRAT/277*1** 6" ICAT Dedicated LED, 277V
- NHICCP-6LMRAT*** 6" Chicago Plenum Dedicated LED
- NHIC-170AT** 6" ICAT Line Voltage
- NHIC-170NBAT** 6" ICAT Line Voltage (No Bracket)
- NH-26Q** 6" Line Voltage
- NHIC-6G24ATFL** 6" ICAT GU24

REMODEL

- NHRIC-6LMRAT*** 6" ICAT Dedicated LED
- NHRIC-170AT** 6" ICAT Line Voltage
- NHRIC-170NBAT** 6" ICAT Line Voltage (No Bracket)
- NHR-26Q** 6" Line Voltage

Retrofit: Marquise retrofit series includes medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

LABELS AND LISTINGS


- cULus classified for Wet Location when used with compatible housing
- [5-Year Limited Warranty](#)
- Certified to the high efficacy requirements of California Title 24 JA8-2022
- ASTM E283 for Air-Tight
- FCC compliant




PRODUCT IMAGES AND DIMENSIONS



NRMC3-61
Reflector

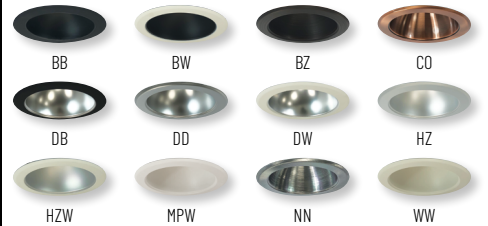

NRMC3-62
Baffle

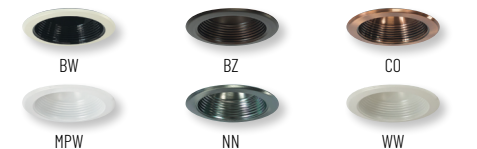

6" Marquise III Retrofit Downlight

| Trim Type | Lumens / Wattage | CCT | Beam Spread | Finish (see chart below) | | | | |
|-----------------------------|--------------------------|-------------------|-------------------------|------------------------------------|------------|------------|-----------|-----------|
| NRMC3-61 = Reflector | L1 = 1000lm / 12W | 27 = 2700K | S = Spot | BB = Black / Black Flange | | | | |
| NRMC3-62 = Baffle | | 30 = 3000K | N = Narrow Flood | BW = Black / White Flange | | | | |
| | | 35 = 3500K | F = Flood | BZ = Bronze / Bronze Flange | | | | |
| | | 40 = 4000K | | CO = Copper / Copper Flange | | | | |
| Available Finishes | | | | | | | | |
| | DB | DD | DW | HZ | HZW | MPW | NN | WW |
| 61 | • | • | • | • | • | • | • | • |
| 62 | • | • | • | • | • | • | • | • |

Optional Accessories

| Description |
|--|
| NRA-211SM = Medium base screw-in socket (included) |
| NRA-212SM = Socket adapter for use with GU24 housings |

Example: **NRMC3-61L0930WW** = 6" Marquise III Round Open Retrofit Reflector, 1000lm / 12W, 3000K, White Reflector / White Flange