

Installation Instructions

NLOS-R4TW

4" SURF Round LED Regressed Edge-Lit Surface Mount with Selectable CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

⚠ WARNING - This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

⚠ AVERTISSEMENT - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et à tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.


⚠ AVERTISSEMENT - Afin de prévenir l'endommagement ou l'abrasion des câbles, éviter tout contact entre ces derniers et le bord d'un objet tranchant tel qu'une tôle.

⚠ AVERTISSEMENT - Ce produit doit être installé selon le code d'installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents.


⚠ AVERTISSEMENT - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et à tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.



PACKAGING CONTENTS

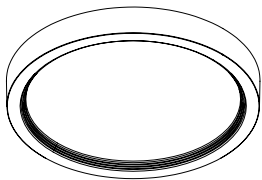


(1) 4" SURF LED Luminaire

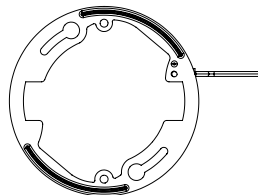

(1) 4" Mounting Bracket




(3) Wire Nuts, Twist-Lock




(2) 8-32 Machine Screws, 1" Long

COMPATIBLE JUNCTION BOXES



4" Octagonal Junction Box
Metallic or Non-Metallic
(Carlon A615)




4" Plastic Round
(Carlon B618R)

SELECTING COLOR TEMPERATURE

Select the desired color temperature by using the switch located on the back of the luminaire.

NOTE: Luminaire is preset to 3000K. And may change in shipping/ handling / installation.

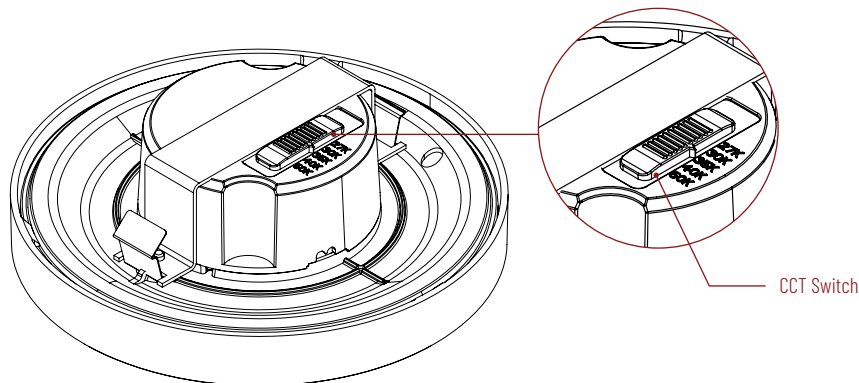

CCT Switch

Installation Instructions


NLOS-R4TW

4" SURF Round LED Regressed Edge-Lit Surface Mount with Selectable CCT


READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

INSTALLATION INSTRUCTIONS


- 1** Use the designated mounting holes to attach the mounting bracket to a junction box.

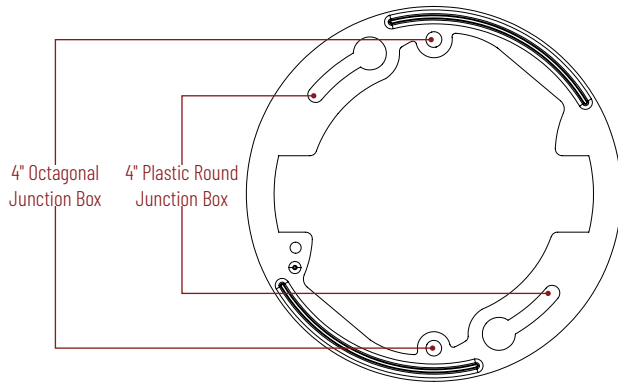

- 2** Attach the mounting bracket to the junction box by using the two screws (provided).
NOTE: DO NOT OVER TORQUE SCREWS. OVER TORQUING SCREWS WILL DEFORM UNIT.

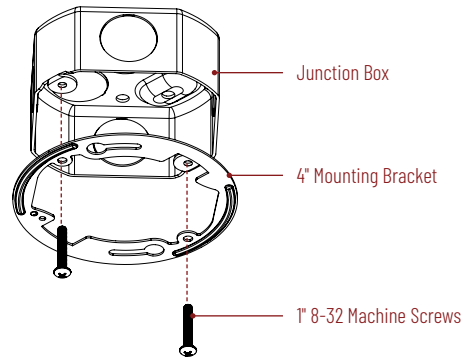

- 3** Connect the supply leads to the luminaire. White to Neutral, Black to Live, and Green to Ground. Place all wires into the junction box.

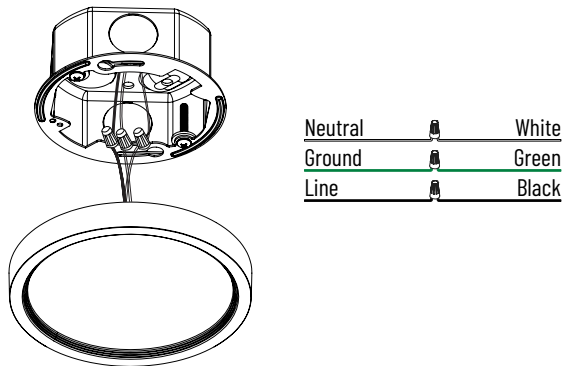

- 4** Align and insert the two torsion springs to the mounting bracket. Snap to secure.
NOTE: DO NOT OVER TORQUE SCREWS. OVER TORQUING SCREWS WILL DEFORM UNIT.

