


NL-3413

3" Square Round with Clear Lens - Wet Lable
35° Adjustable

TRIM DIMENSIONS

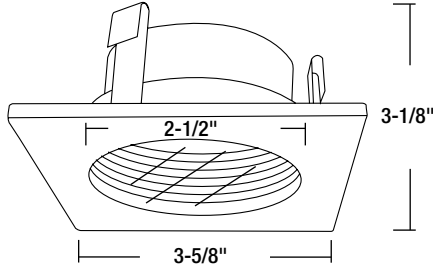

Width/Length: 3-5/8"

Height: 1-3/4"

Aperture: 1-1/2"

FEATURES

Trim

3" die cast aluminum flange provides sharp clean corners. Non-reflective painted finishes and square trim. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Mounting

Trim includes three trim clips that securely mount trim in housing.

Compatible Housings

Compatible with Line Voltage and Low Voltage housings.

Lamp

Low Voltage: 20-50W MR16, VERSA 3-50W 12 MR16 LED, or Halogen MR16
Line Voltage: 50W Max 120V MR16 GU10 or LED

Labels and Listings

cULus Listed for Wet Location when used with compatible housing.



3" Square Pinhole Trim

- NL-3413BB: 3" Square Round with Lens, Black Reflector, Black Flange
- NL-3413BW: 3" Square Round with Lens, Black Reflector, White Flange
- NL-3413BZ: 3" Square Round with Lens, Bronze Reflector, Bronze Flange
- NL-3413NN: 3" Square Round with Lens, Natural Metal Reflector, Natural Metal Flange
- NL-3413WW: 3" Square Round with Lens, White Reflector, White Flange

Type

Project

Catalog No.

Lamp/Wattage

Compatible Housings

LOW VOLTAGE

New Construction IC Housing

- NLIC-301QAT/20 3" IC Air-Tight Low Voltage Housing, 20W Max, 120V Magnetic
- NLIC-301QAT/37 3" IC Air-Tight Low Voltage Housing, 37W Max, 120V Magnetic
- NLIC-301QAT 3" IC Air-Tight Low Voltage Housing, 50W Max, 120V Magnetic
- NLIC-301AT/1EL 3" IC Air-Tight Low Voltage Housing, LED Compatible 3-50W 120V Electronic
- NLIC-301AT/(lamp)* 3" IC Air-Tight Low Voltage Housing with LED Lamp

New Construction Non-IC Housing

- NL-301QAT/20 3" Air-Tight Low Voltage Quick Connect Housing, 20W Max, 120V Magnetic
- NL-301QAT/37 3" Air-Tight Low Voltage Quick Connect Housing, 37W Max, 120V Magnetic
- NL-301QAT 3" Air-Tight Low Voltage Quick Connect Housing, 50W Max, 120V Magnetic
- NL-301AT/1EL 3" Air-Tight LV Quick Connect Housing, LED Compatible 3-50W 120V Electronic
- NL-301AT/(lamp)* 3" Air-Tight Low Voltage Quick Connect Housing with LED Lamp

Remodel Non-IC Housing

- NLR-304QAT/20 3" Air-Tight Low Voltage Remodel Housing, 20W Max, 120V Magnetic
- NLR-304QAT/37 3" Air-Tight Low Voltage Remodel Housing, 37W Max, 120V Magnetic
- NLR-304QAT 3" Air-Tight Low Voltage Remodel Housing, 50W Max, 120V Magnetic
- NLR-304AT/1EL 3" Air-Tight LV Remodel Housing, LED Compatible 3-50W 120V Electronic
- NLR-304AT/(lamp)* 3" Air-Tight Low Voltage Remodel Housing with LED Lamp

Remodel Non-IC Housing for Remote Transformer

- NLR-305AT/20 3" Air-Tight Remodel Housing for Remote Transformer, 20W Max
- NLR-304QAT/37 3" Air-Tight Remodel Housing for Remote Transformer, 37W Max
- NLR-304QAT 3" Air-Tight Remodel Housing for Remote Transformer, 50W Max

*MR16 LED Lamp Option

- /E01 LED MR16 7Watt 27K Spot (25°) 50 Watt Equall
- /E02 LED MR16 7Watt 27K Flood (35°) 50 Watt Equall
- /E03 LED MR16 7Watt 30K Spot (25°) 50 Watt Equall
- /E04 LED MR16 7Watt 30K Flood (35°) 50 Watt Equall

LINE VOLTAGE

Double Wall New Construction IC Housing

- NHIC-350AT 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 50W Max
- NHIC-350AT/20 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 20W Max
- NHIC-350AT/10 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 10W Max

New Construction Non-IC Housing

- NH-350AT 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 50W Max
- NH-350AT/20 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 20W Max
- NH-350AT/10 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 10W Max

Remodel Non-IC Housing

- NHR-354AT 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 50W Max
- NHR-354AT/20 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 20W Max
- NHR-354AT/10 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 10W Max