

NL-438

4" Specular Clear Reflector for Decorative Glass

Type

Project

Catalog No.

Notes

FEATURES

Trim: Precision spun 0.050 aluminum high grade reflector with white flange. Flange has three holes to accept stand off included with each decorative glass. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Mounting: Trim includes three trim clips that securely mounts inside the housing.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)
50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL; NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)
75W MR16 max. (NL-401/75/1EL; NL-401/75/2EL; NL-401/75; NLR-404/75/1EL; NLR-404/75/2EL; NLR-404/75)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)
25W MR16 max. (NFBIC-401AT/25A)
50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)


IMPORTANT: DO NOT USE GLASS LENS WHEN USING LAMP WITH GLASS COVER

LISTING

cULus Listed for Damp Locations when used with compatible housing



PRODUCT IMAGES AND DIMENSIONS

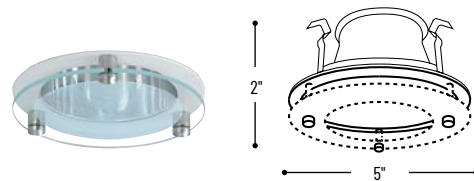

Compatible Housings

Catalog No.

Low Voltage

- NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W
- NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W
- NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W
- NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W
- NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W
- NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W
- NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W
- NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W
- NL-401/75 = Non-IC New Const. / 120V Magnetic / 75W
- NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W
- NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W
- NL-401/75/1EL = Non-IC New Construction / 120V Electronic / 75W
- NL-401/75/2EL = Non-IC New Construction / 277V Electronic / 75W
- NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W
- NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W
- NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W
- NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W
- NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W
- NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W
- NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W
- NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W

- NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W
- NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W
- NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W
- NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W

- NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W
- NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W
- NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W
- NLR-404/75 = Non-IC Remodel / 120V Magnetic / 75W
- NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W
- NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W
- NLR-404/75/1EL = Non-IC Remodel / 120V Electronic / 75W
- NLR-404/75/2EL = Non-IC Remodel / 277V Electronic / 75W

- NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W
- NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W
- NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

- NSEIC-407AT/20 = ICAT LED New Construction / 20W
- NSERIC-407AT/20 = ICAT LED Remodel / 20W
- NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W
- NSLIC-401AT/10 = ICAT New Construction / 50W
- NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W
- NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W

4" Specular Clear Reflector for Decorative Glass

Catalog No.

- NL-438BZ = 4" Specular Clear Reflector for Decorative Glass, Bronze Flange
- NL-438C = 4" Specular Clear Reflector for Decorative Glass, Chrome Flange
- NL-438N = 4" Specular Clear Reflector for Decorative Glass, Natural Metal Flange
- NL-438W = 4" Specular Clear Reflector for Decorative Glass, White Flange

4" Decorative Glass

Catalog No.

- NTG-4B/80 = 4" Tempered Blue Glass with 3-1/8" Open Center
- NTG-4CF = 4" Tempered Clear Glass with Frosted Center
- NTG-4FC = 4" Tempered Frosted Glass with Clear Center
- NTG-4HC = 4" Tempered Clear Glass with Frosted Center and 3-1/8" Open Center



NTG-4B/80 NTG-4CF NTG-4FC NTG-4HC

Example: NL-438BZ = 4" Specular Clear Reflector for Decorative Glass, Bronze Flange