

NL-4588

4" Square Reflector with 1.5" Pinhole

FEATURES

Trim: Precision spun 0.050 aluminum high grade specular reflector that includes a frosted flat lens with a 1-3/4" clear center. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Reflector: True square appearance with die formed steel sides and top. The lamp holder is position high for excellent visual comfort.

Flange: Die-cast aluminum with clean crisp corners and aperture.

Lamp Holder: Die-cast aluminum lamp holder features hot aiming screw, locking screw and includes removable snoot for efficient light production from 1.5" pinhole.

Mounting: Trim includes two trim clips that securely mount trim in housing.

COMPATIBLE HOUSINGS

Compatible with Line Voltage and Low Voltage housings. See individual specification sheets for more information.

COMPATIBLE LAMP / HOUSINGS

NL-408AT Series: 50W MR16 max.

NLIC-408 Series: 50W MR16 max.

NLR-409AT Series: 50W MR16 max.

LISTINGS

cULus Listed for Damp Locations




Type _____

Project _____

Catalog No. _____

Notes _____

PRODUCT IMAGES AND DIMENSIONS

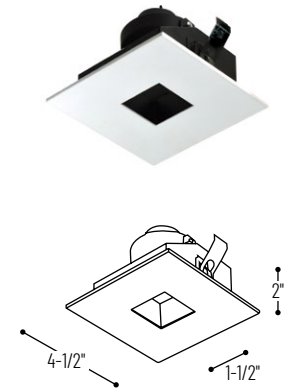

4" Square Reflector with 1.5" Pinhole Trim

Catalog No. _____

NL-4588B = 4" Square Reflector with Black Trim

NL-4588BZ = 4" Square Reflector with Bronze Trim

NL-4588N = 4" Square Reflector with Natural Metal Trim

NL-4588W = 4" Square Reflector with White Trim

Compatible Housings

Catalog No. _____

New Construction

NL-408AT = Non-IC AT New Construction / 120V Magnetic / 50W

NL-408AT/20 = Non-IC AT New Construction / 120V Magnetic / 20W

NL-408AT/37 = Non-IC AT New Construction / 120V Magnetic / 37W

NL-408AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W

NL-408AT/20/1EL = Non-IC AT New Construction / 120V Electronic / 20W

NL-408AT/37/1EL = Non-IC AT New Construction / 120V Electronic / 37W

NLIC-408AT = IC AT New Construction / 120V Magnetic / 50W

NLIC-408AT/1EL = IC AT New Construction / 120V Electronic / 50W

Remodel

NLR-409AT = Non-IC AT Remodel / 120V Magnetic / 50W

NLR-409AT/20 = Non-IC AT Remodel / 120V Magnetic / 20W

NLR-409AT/37 = Non-IC AT Remodel / 120V Magnetic / 37W

NLR-409AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W

NLR-409AT/20/1EL = Non-IC AT Remodel / 120V Electronic / 20W

NLR-409AT/37/1EL = Non-IC AT Remodel / 120V Electronic / 37W

Example: **NL-4588W** = 4" Square Reflector with White Pinhole Trim