


NL-612 / NL-613 / NL-614 / NL-616
Adjustable Reflector with Ring

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS

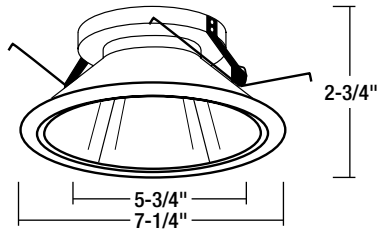

Trim OD: 7-1/4"
 Aperture: 5-3/4"
 Height: 2-3/4"

FEATURES

Trim
 Precision spun 0.050 aluminum high grade reflector. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°. Separate trim ring available in metal or plastic, may also be used with custom combination of ring finishes.

Mounting
 Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

Compatible Housings
 Compatible with Low Voltage housings, Low Voltage retrofit kits, and Line Voltage MR16 GU10 retrofit kits.
 See individual specification sheets for more information.

Lamp
Low Voltage
 20W-50W 12V MR16 (NLIC-601 Series; NL-601 Series; NLR-604 Series)
 20W-75W 12V MR16 (NL-601/75 Series; NLR-604/75 Series)
Line Voltage Retrofit Kits
 50W 120V MR16 GU10 Max. (NRA-34/10; NRA-37/10)
Low Voltage Retrofit Kits
 20W-50W 12V MR16 (NLK-2600; NLK-2600EL)

Labels and Listings
 cULus Listed for Damp Location when used with compatible housing.

Compatible Housings

LOW VOLTAGE		
Item Number	Installation Type	Dimensions
NL-601Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277/75Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NLIC-601QAT	IC Air-Tight New Construction - 120V Mag.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/1EL	IC Air-Tight New Construction - 120V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/2EL	IC Air-Tight New Construction - 277V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLR-604Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277/75Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
LINE VOLTAGE RETROFIT KITS		
NRA-34/10	Non-IC - Without Lamp	Medium Base Socket adapter
NRA-37/10	Non-IC - With 50W Lamp	Medium Base Socket adapter
LOW VOLTAGE RETROFIT KITS		
NLK-2600	Non-IC - 120V Magnetic	W: 4-1/2" L: 4-3/4" H: 5-1/8"
NLK-2600EL	Non-IC - 120V Electronic	W: 5-1/8" L: 5-1/2" H: 4-1/2"

Adjustable Reflector with Ring

- NL-612: Specular Gold Adjustable Reflector with White Plastic Ring
- NL-613: Specular Black Adjustable Reflector with White Plastic Ring
- NL-613BZ: Bronze Adjustable Reflector with Bronze Metal Ring
- NL-613CO: Copper Adjustable Reflector with Copper Metal Ring
- NL-614: Specular Clear Adjustable Reflector with White Plastic Ring
- NL-616: Specular White Adjustable Reflector with White Plastic Ring