


**NL-618 / NL-619**  
**Adjustable Eyeball with Baffle and Metal Ring**

**TRIM DIMENSIONS**

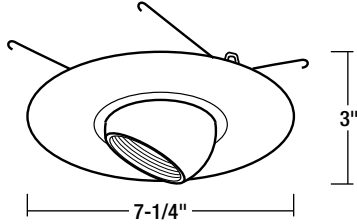

Trim OD: 7-1/4"  
 Height: 3"

**FEATURES**

**Trim**  
 Metal trim with adjustable eyeball can be rotated 358° horizontally and 35° vertically. Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Gimbal ring allows lamp to be mounted on top of the trim. Separate trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

**Mounting**  
 Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

**Compatible Housings**  
 Compatible with Low Voltage housings, Low Voltage retrofit kits, and Line Voltage MR16 GU10 retrofit kits. See individual specification sheets for more information.

**Lamp**  
**Low Voltage**  
 20W-50W 12V MR16 (NLIC-601 Series; NL-601 Series; NLR-604 Series)  
 20W-75W 12V MR16 (NL-601/75 Series; NLR-604/75 Series)  
**Line Voltage Retrofit Kits**  
 50W 120V MR16 GU10 Max. (NRA-34/10; NRA-37/10)  
**Low Voltage Retrofit Kits**  
 20W-50W 12V MR16 (NLK-2600; NLK-2600EL)

**Labels and Listings**  
 cULus Listed for Damp Location when used with compatible housing.

**Adjustable Eyeball with Baffle and Metal Ring**

- NL-618B: White Adjustable Eyeball, Black Baffle and White Metal Ring
- NL-618BB: Black Adjustable Eyeball, Black Baffle and Black Metal Ring
- NL-618W: White Adjustable Eyeball, White Baffle and White Metal Ring
- NL-619C: Chrome Adjustable Eyeball, Black Baffle and Chrome Metal Ring
- NL-619G: Gold Adjustable Eyeball, Black Baffle and Gold Metal Ring

Type
Project
Catalog No.
Lamp/Wattage

**Compatible Housings**

LOW VOLTAGE		
Item Number	Installation Type	Dimensions
NL-601Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277/75Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NLIC-601QAT	IC Air-Tight New Construction - 120V Mag.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/1EL	IC Air-Tight New Construction - 120V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/2EL	IC Air-Tight New Construction - 277V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLR-604Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277/75Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
LINE VOLTAGE RETROFIT KITS		
NRA-34/10	Non-IC - Without Lamp	Medium Base Socket adapter
NRA-37/10	Non-IC - With 50W Lamp	Medium Base Socket adapter
LOW VOLTAGE RETROFIT KITS		
NLK-2600	Non-IC - 120V Magnetic	W: 4-1/2" L: 4-3/4" H: 5-1/8"
NLK-2600EL	Non-IC - 120V Electronic	W: 5-1/8" L: 5-1/2" H: 4-1/2"