

NL-620
2" Pinhole with Baffle and White Metal Trim

FEATURES

Trim

Metal trim with 2" pinhole. Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Gimbal ring allows lamp to be mounted on top of the trim.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

Compatible Housings

Compatible with Low Voltage housings, Low Voltage retrofit kits, and Line Voltage MR16 GU10 retrofit kits.

See individual specification sheets for more information.

Lamp

Low Voltage

20W-50W 12V MR16 (NLIC-601 Series; NL-601 Series; NLR-604 Series)

20W-75W 12V MR16 (NL-601/75 Series; NLR-604/75 Series)

Line Voltage Retrofit Kits

50W 120V MR16 GU10 Max. (NRA-34/10; NRA-37/10)


Low Voltage Retrofit Kits

20W-50W 12V MR16 (NLK-2600; NLK-2600EL)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

DIMENSIONS

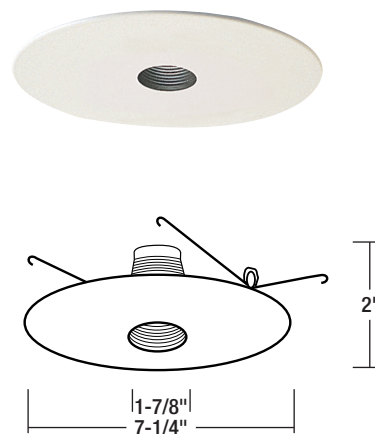

Trim OD: 7-1/4"
 Aperture: 1-7/8"
 Height: 2"

Compatible Housings

LOW VOLTAGE		
Item Number	Installation Type	Dimensions
NL-601Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75Q	Non-IC New Construction - 120V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/277/75Q	Non-IC New Construction - 277V Magnetic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/1EL	Non-IC New Construction - 120V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NL-601/75/2EL	Non-IC New Construction - 277V Electronic	W: 7-1/2" L: 12-1/2" H: 7-1/2"
NLIC-601QAT	IC Air-Tight New Construction - 120V Mag.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/1EL	IC Air-Tight New Construction - 120V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLIC-601/2EL	IC Air-Tight New Construction - 277V Elec.	W: 9-1/2" L: 13-1/8" H: 7-3/4"
NLR-604Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75Q	Non-IC Remodel Housing - 120V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/277/75Q	Non-IC Remodel Housing - 277V Magnetic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/1EL	Non-IC Remodel Housing - 120V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
NLR-604/75/2EL	Non-IC Remodel Housing - 277V Electronic	W: 6-1/4" L: 14-1/2" H: 7-1/2"
LINE VOLTAGE RETROFIT KITS		
NRA-34/10	Non-IC - Without Lamp	Medium Base Socket adapter
NRA-37/10	Non-IC - With 50W Lamp	Medium Base Socket adapter
LOW VOLTAGE RETROFIT KITS		
NLK-2600	Non-IC - 120V Magnetic	W: 4-1/2" L: 4-3/4" H: 5-1/8"
NLK-2600EL	Non-IC - 120V Electronic	W: 5-1/8" L: 5-1/2" H: 4-1/2"

2" Pinhole with Baffle and White Metal Trim

NL-620W: 2" Pinhole with White Baffle and White Metal Trim