

NL-645

6" Metal Trim with Slot Aperture

Type

Project

Catalog No.

Notes

FEATURES

Trim: Metal trim with 1-3/8" x 2-1/4" slot aperture that can rotate 135° horizontally. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Mounting: Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

50W 12V MR16 max. ([NLIC-6010AT](#); [NL-601 Series](#); [NLR-604 Series](#))

75W 12V MR16 max. ([NL-601/75 Series](#); [NLR-604/75 Series](#))

Retrofit Kits:

50W 120V MR16 GU10 max. ([NRA-34/10](#))


50W 12V MR16 max. ([NLK-2600](#))

LABELS AND LISTINGS

cULus Listed for Damp Locations when used with compatible housings.



PRODUCT IMAGES & DIMENSIONS

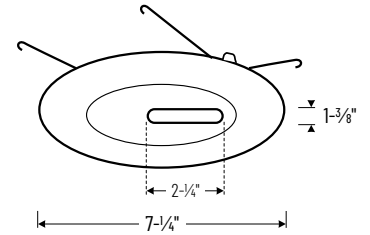

Compatible Housings

Catalog No.

Low Voltage

- NL-601Q** = Non-IC New Construction / 120V Magnetic / 50W max.
- NL-601/1EL** = Non-IC New Construction / 120V Electronic / 50W max.
- NL-601/2EL** = Non-IC New Construction / 277V Electronic / 50W max.
- NL-601/75/2EL** = Non-IC New Construction / 277V Electronic / 75W max.
- NLIC-6010AT** = ICAT New Construction / 120V Magnetic / 50W max.
- NLR-604/1EL** = Non-IC Remodel / 120V Electronic / 50W max.
- NLR-604/75Q** = Non-IC Remodel / 120V Magnetic / 75W max.
- NLR-604/75/1EL** = Non-IC Remodel / 120V Electronic / 75W max.
- NLR-604/75/2EL** = Non-IC Remodel / 277V Electronic / 75W max.

Low Voltage Retrofit Kits

NLK-2600 = Non-IC / 120V Magnetic

Line Voltage Retrofit Kit

NRA-34/10 = Non-IC / Without Lamp

6" Metal Trim with Slot Aperture

Catalog No.

NL-645 = 6" White Metal Trim with Slot Aperture

Example: **NL-645** = 6" White Metal Trim with Slot Aperture