

NRM2-514 / NRM2-517 / NRM2-519

5" Marquise II Adjustable Reflectors

Source: 15W to 30W LED
900lm to 2500lm

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Marquise II COB Series enhances an established series of downlighting with the latest COB technology by Cree®. The COB allows for better optic control offering three beam spreads. Beam spreads focus the light down to the work plane from high ceiling applications.

FEATURES

- 5-year Limited Warranty
- Cree® COB LED Technology
- Spot, narrow or flood beam spreads
- 900lm, 1500lm or 2500lm LED packages
- 2700K, 3000K, 3500K and 4000K @ 90+CRI
- Can be used to comply with JA8-2019 Title 24 High Efficacy LED light source requirements

CONSTRUCTION

Trim: Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

Mounting: Trim includes torsion springs to mount trim securely to housing.

ELECTRICAL

Lumens / Wattage:

L09 = 900lm / 15W

L15 = 1500lm / 18W

L25 = 2500lm / 30W

Color Temperature: 2700K, 3000K, 3500K, 4000K

Color Rendering Index: 90+CRI

Beam Spread:

S = 37° Spot

M = 60° Narrow Flood

F = 85° Flood

Operating Temperature: Determined by housing

Lifetime: 60,000 hours @ L70

COMPATIBLE HOUSINGS

Reflectors are compatible with respective Marquise II series housings manufactured by Nora Lighting.

CATALOG NO.

DESCRIPTION


CATALOG NO.	DESCRIPTION
NHM2-515	5" Non-IC New Construction (1500lm)
NHM2-525	5" Non-IC New Construction (2500lm)
NHRM2-515	5" Non-IC Remodel (1500lm)
NHMIC2-509	5" IC New Construction (900lm)
NHRMIC2-509	5" IC Remodel (900lm)

LABELS AND LISTINGS

- cULus Listed for Damp Location when used with compatible housing
- ENERGY STAR® certified
- Certified to the high efficacy requirements of California Title 24 JA8-2019
- [5-Year Limited Warranty](#)
- WSEC ASTM E283 for Air-Tight



PRODUCT IMAGES AND DIMENSIONS

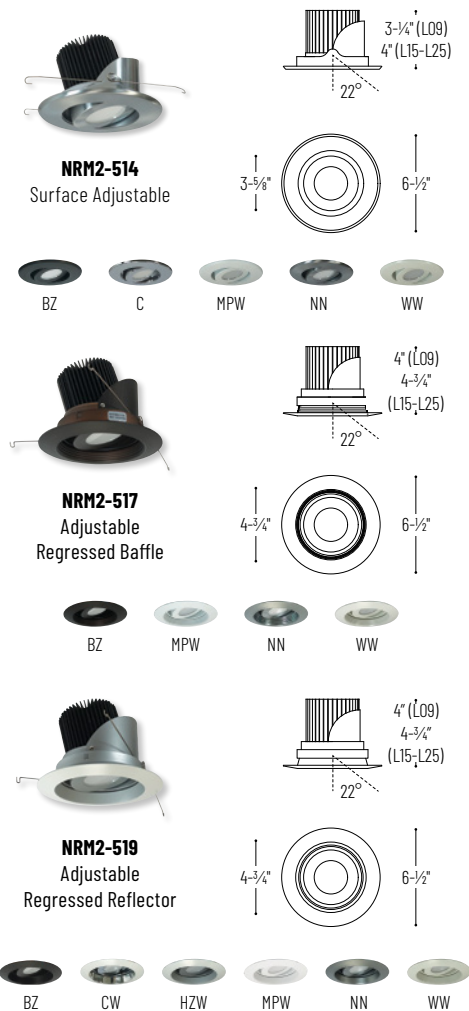

5" Marquise II Adjustable Reflectors - Dedicated Housing Required

Reflector Type	Lumens / Wattage	Color Temp.	Beam Spread	Finish (see chart below)
NRM2-514 = Surface Adjustable	L09 = 900lm / 15W	27 = 2700K	S = Spot	BZ = Bronze / Bronze Flange
NRM2-517 = Regress Baffle Adj.	L15 = 1500lm / 18W	30 = 3000K	M = Narrow Flood	C = Chrome
NRM2-519 = Regress Reflector Adj.	L25 = 2500lm / 30W	35 = 3500K	F = Flood	CW = Diffused Clear / White Flange
		40 = 4000K		HZW = Haze / White Flange
				MPW = Matte Powder White
				NN = Natural Metal / Natural Metal Flange
				WW = White / White Flange

Available Finishes

	BZ	C	CW	HZW	MPW	NN	WW
514	•	•			•	•	•
517					•	•	•
519			•	•	•	•	•

Example: **NRM2-514L1530SBZ** = 5" Marquise II Surface Adjustable, 1500lm / 18W LED, 3000K, Spot Beam Spread, Bronze Finish