

# NRM2-614 / NRM2-617 / NRM2-619

## 6" Marquise II Adjustable Reflectors

Source: 15W to 30W LED  
900lm to 2500lm

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

Marquise II COB Series enhances an established series of downlighting with the latest COB technology by Cree®. The COB allows for better optic control offering three beam spreads. Beam spreads focus the light down to the work plane from high ceiling applications.

### FEATURES

- 5-year Limited Warranty
- Cree® COB LED Technology
- Spot, narrow or flood beam spreads
- 900lm, 1500lm or 2500lm LED packages
- 2700K, 3000K, 3500K and 4000K @ 90+CRI
- Can be used to comply with JA8-2019 Title 24 High Efficacy LED light source requirements

### CONSTRUCTION

**Trim:** Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

**Mounting:** Trim includes torsion springs to mount trim securely to housing.

### ELECTRICAL

#### Lumens / Wattage:

L09 = 900lm / 15W

L15 = 1500lm / 18W

L25 = 2500lm / 30W

**Color Temperature:** 2700K, 3000K, 3500K, 4000K

**Color Rendering Index:** 90+CRI

#### Beam Spread:

S = 38° Spot

M = 60° Narrow Flood

F = 85° Flood

**Operating Temperature:** Determined by housing

**Lifetime:** 60,000 hours @ L70

### COMPATIBLE HOUSINGS

Reflectors are compatible with respective Marquise II series housings manufactured by Nora Lighting.

#### CATALOG NO. DESCRIPTION





<b>NHM2-615</b>	6" Non-IC New Construction (1500lm)
<b>NHM2-625</b>	6" Non-IC New Construction (2500lm)
<b>NHRM2-615</b>	6" Non-IC Remodel (1500lm)
<b>NHMIC2-609</b>	6" IC New Construction (900lm)
<b>NHRMIC2-609</b>	6" IC Remodel (900lm)
<b>NHMICD2-615</b>	6" IC Double Wall (1500lm)

### LABELS AND LISTINGS

- cULus Listed for Damp Location when used with compatible housing
- ENERGY STAR® certified
- Certified to the high efficacy requirements of California Title 24 JA8-2019
- [5-Year Limited Warranty](#)
- ASTM E283 for Air-Tight



### PRODUCT IMAGES AND DIMENSIONS

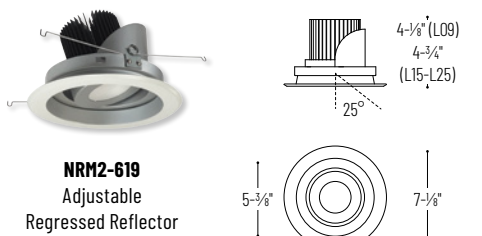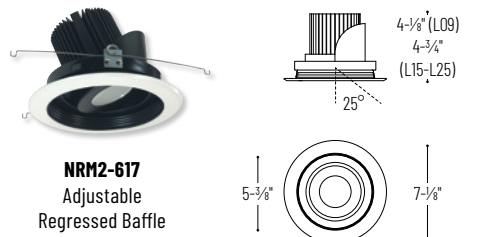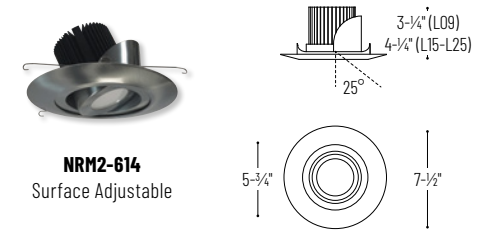

## 6" Adjustable Marquise II Reflectors - Dedicated Housing Required

Reflector Type	Lumens / Wattage	Color Temp.	Beam Spread	Finish (see chart below)
<b>NRM2-614</b> = Surface Adjustable	<b>L09</b> = 900lm / 15W	<b>27</b> = 2700K	<b>S</b> = Spot	<b>BW</b> = Black / White Flange
<b>NRM2-617</b> = Regress Baffle Adj.	<b>L15</b> = 1500lm / 18W	<b>30</b> = 3000K	<b>M</b> = Narrow Flood	<b>BZ</b> = Bronze / Bronze Flange
<b>NRM2-619</b> = Regress Reflector Adj.	<b>L25</b> = 2500lm / 30W	<b>35</b> = 3500K	<b>F</b> = Flood	<b>C</b> = Chrome
		<b>40</b> = 4000K		<b>CW</b> = Specular Clear / White Flange
				<b>CO</b> = Copper / Copper Flange
				<b>HZW</b> = Haze / White Flange
				<b>MPW</b> = Matte Powder White
				<b>NN</b> = Natural Metal / Natural Metal Flange
				<b>WW</b> = White / White Flange

Available Finishes

	BW	BZ	C	CO	CW	HZW	MPW	NN	WW
<b>614</b>			•				•	•	•
<b>617</b>	•	•					•	•	•
<b>619</b>	•	•		•	•	•	•	•	•

Example: **NRM2-614L1530SBZ** = 6" Marquise II Surface Adjustable, 1500lm / 18W LED, 3000K, Spot Beam Spread, Bronze Finish