

Type _____
 Project _____
 Catalog No. _____
 Lamp/Wattage _____

NMRI Series Housing
Line Voltage Recessed Multiple Lighting Systems

Source: 75W PAR 30
 150W PAR38

PRODUCT DESCRIPTION

Multi-lamp functionality and architectural aesthetics define Nora Lighting's recessed line voltage Multiple Lighting System. The recessed family of fixtures are available in one to three lamp linear to compliment most applications. The fixture fascia is slightly recessed above the ceiling line, creating a stylish coffered ceiling design. A variety of fully adjustable trims are offered for independent aiming of each lamp.

CONSTRUCTION

Housing

0.35" galvanized steel with louver-type ventilation openings for proper heat dissipation. Contains six 3/4" knockouts for electrical entry to the wiring compartment are available. A 0.35" thick steel cover secured by wing nuts encloses all lamp connections inside the housing.

Installation

Universal brackets accept 25" C-Channel Bar Hangers (NRA-38), 27" flat bar hangers (NRA-28), 24-1/2" bar hangers with captive nails (NRA-60), or simple rigid 1/2" steel conduit for tie-down to ceilings grids.

Minimum Clearance

Requires a minimum clearance of 3" from thermal insulation and 1/2" from any adjacent building components.

Socket(s)

4KV rated, porcelain jacketed, medium base construction socket. Each socket is individually wired for independent switching or dimming.

Thermal Protector

Standard UL thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing allow greater airflow.

Lamp(s)

75W PAR 30 - lamp and wattage varies with trim (ordered separately)
 150W PAR 38 - lamp and wattage varies with trim (ordered separately)

CONFIGURATION

Available from one lamp to three lamps.

TRIM (ORDERED SEPARATELY)

Rigid 0.05" steel plate is shaped into a solid splay design to conceal all electrical and mechanical components and provide a sleek appearance to the ceiling. Evenly spaced apertures accept a variety of trims. Pre-installed torsion springs secure the trims.

Custom Combination

Custom combination of incandescent and high intensity discharge (HID) trims are available, consult factory.

Optional Accessories


- NRA-28: 27" Flat Bar Hangers
- NRA-38: 25" C-Channel Bar Hangers
- NRA-60: 24-1/2" Bar Hangers

Labels and Listings

cULus Listed for Damp Location




DIMENSIONS

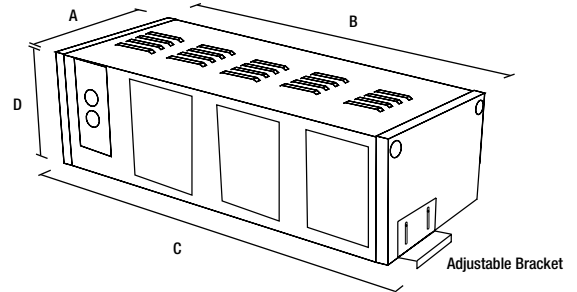

Configuration

1 Row / 1 Lamp


- A: Width: 9-1/2"
- B: Length: 9-1/2"
- C: Length (w/ Adj. Bracket): 10-1/2"
- D: Height: 8"
- Cut-out: 8-1/2" x 8-1/2"



Configuration

1 Row / 2 Lamp


- A: Width: 9-1/2"
- B: Length: 18"
- C: Length (w/ Adj. Bracket): 19"
- D: Height: 8"
- Cut-out: 8-1/2" x 17"



Configuration

1 Row / 3 Lamp

- A: Width: 9-1/2"
- B: Length: 23-1/2"
- C: Length (w/ Adj. Bracket): 24-1/2"
- D: Height: 8"
- Cut-out: 8-1/2" x 22-1/2"

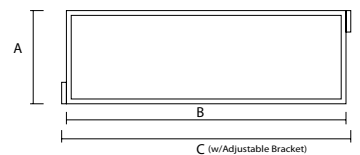

PLEASE NOTE CUT-OUT DIMENSIONS!

NMRI Housing

Series	Light Source	#of Rows	# of Lamps	Ballast	Voltage	Lamp Type	Wattage
NMR	I=Incandescent	1=1 Row (1 to 3 lamps only)	1=1 Lamp 2=2 Lamps 3=3 Lamps	N=None	1=120V	0=PAR30 8=PAR38	75=75W 150=150W

Create a complete MLS housing catalog number: NMRI-13N1075