


Type _____
 Project _____
 Catalog No. _____
 Lamp/Wattage _____

NMRT-418 Series
MR16 Multiple Lighting System Trims

Source: 20W-50W 12V MR16

TRIM DIMENSIONS

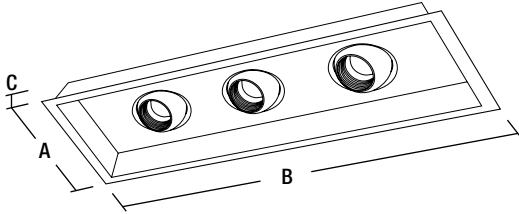

Adjustable: 32°

FEATURES

Trim
 Adjustable metal gimbal ring can be adjusted up to 32°. Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare.

Mounting
 Trim includes two "V" torsion springs to mount trim securely to housing.


Compatible Multiple Lighting System Housings
 Compatible with Low Voltage housings.
 See individual specification sheets for more information.

Lamp
Low Voltage
 20W-50W 12V MR16 (Ordered Separately)


Labels and Listings
 cULus Listed for Damp Location when used with compatible housing.

DIMENSIONS


CONFIGURATION
 1 Row / 1 Lamp
 A: Width: 9-3/4"
 B: Length: 9-3/4"
 C: Height: 2-1/4"



CONFIGURATION
 1 Row / 2 Lamps
 A: Width: 9-3/4"
 B: Length: 18"
 C: Height: 2-1/4"



CONFIGURATION
 1 Row / 3 Lamps
 A: Width: 9-3/4"
 B: Length: 23-3/4"
 C: Height: 2-1/4"



NMRT-418 Trim

Series	Type	#of Rows	# of Lamps	Trim	Finish
NMR	T=Trim	1=1 Row (1 to 3 Lamps only)	1=1 Lamp 2=2 Lamps 3=3 Lamps	418=MR16	BW=Black Face/White Flange SS=Silver Face/Silver Flange WW=White Face/White Flange

Create a complete MLS trim catalog number: Example: NMRT - 13418SS