


Type \_\_\_\_\_  
 Project \_\_\_\_\_  
 Catalog No. \_\_\_\_\_  
 Lamp/Wattage \_\_\_\_\_

**NMRT-445 Series**  
**MR16 Multiple Lighting System Trims**

Source: 20W-50W 12V MR16

**TRIM DIMENSIONS**

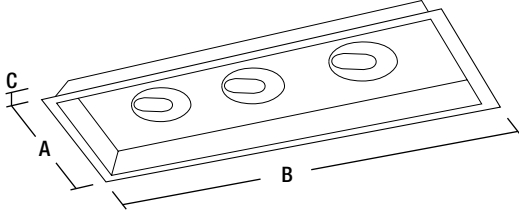

Adjustable: 35°

**FEATURES**

**Trim**  
 Metal trim with 1-3/8" x 2-1/4" slot aperture that can be rotated up to 358°. Gimbal ring allows lamp to be adjusted up to 35°

**Mounting**  
 Trim includes two "V" torsion springs to mount trim securely to housing.


**Compatible Multiple Lighting System Housings**  
 Compatible with Low Voltage housings.  
 See individual specification sheets for more information.

**Lamp**  
**Low Voltage**  
 20W-50W 12V MR16 (Ordered Separately)


**Labels and Listings**  
 cULus Listed for Damp Location when used with compatible housing.

**DIMENSIONS**


**CONFIGURATION**  
 1 Row / 1 Lamp  
 A: Width: 9-3/4"  
 B: Length: 9-3/4"  
 C: Height: 2-1/4"



**CONFIGURATION**  
 1 Row / 2 Lamps  
 A: Width: 9-3/4"  
 B: Length: 18"  
 C: Height: 2-1/4"



**CONFIGURATION**  
 1 Row / 3 Lamps  
 A: Width: 9-3/4"  
 B: Length: 23-3/4"  
 C: Height: 2-1/4"



**NMRT-445 Trim**

Series	Type	#of Rows	# of Lamps	Trim	Finish
NMR	T=Trim	1=1 Row (1 to 3 Lamps only)	1=1 Lamp 2=2 Lamps 3=3 Lamps	445=MR16	BW=Black Face/White Flange SS=Silver Face/Silver Flange WW=White Face/White Flange

Create a complete MLS trim catalog number: Example: NMRT - 1 3445SS