NMRTLI

Trimless Line Voltage Multiple Lighting Housing (LED module compatible)
Source: Medium Base Socket
75W Max. (Can be factory labeled with reduced wattage)

Type
Project
Catalog No.
Notes

PRODUCT DESCRIPTION

Multi-LED functionality and architectural aesthetics define LED Trimless Multiple Lighting System. This recessed family of fixtures are available in one to three LED linear configurations, must specify lamp holders separately. These LED trimless units can be installed in new or remodel construction with drywall ceilings. The finished look blends with the ceiling line with no visible flange. Accessories include a frame for new construction rough-in and a flange kit for application where trimless does not work.

CONSTRUCTION

Housing: Housing: 0.05" galvanized steel with ventilation openings for proper heat dissipation. A separate driver compartment with eight ½" knockouts for in and out wiring. Housing includes adjustable brackets for various ceiling depths and separate mud ring for finishing.

Minimum Clearance: Requires a minimum clearance of 3" from thermal insulation and ½" from any adjacent building components.

Lamp Holder(s) (Ordered Separately): Each lamp holder includes a quick connect that easily attaches to quick connect from the wiring compartment. Quick connects can be supplied with a single supply or individual supply line for independent control. Lamp holders simply twist and lock into housing, and specified in black or white.

ELECTRICAL

Input Voltage: 120V
Socket: Medium base
Wattage: 75W max. each socket (can be factory labeled for reduced wattage)
Operating Temp.: 0°-70°C max. ambient temp.
Dimming: Triac / ELV dimming

COMPATIBLE LAMP HOLDER

Catalog No.	Description
NMRT-652TL	PAR30 Lamp Holder

OPTIONAL ACCESSORIES

Multiple lighting housings can be converted to new construction installations or flanged units with accessories.

Catalog No.	Description
NMRTL-F1	(1) Head frame-in for new construction installation
NMRTL-F2	(2) Head frame-in for new construction installation
NMRTL-F3	(3) Head frame-in for new construction installation
NMRTL-1FK	(1) Head flange kit (Black or White finish)
NMRTL-2FK	(2) Head flange kit (Black or White finish)
NMRTL-3FK	(3) Head flange kit (Black or White finish)

LABELS AND LISTINGS

- cULus Listed
- 5 Year Limited Warranty

PRODUCT IMAGES AND DIMENSIONS

(Shown without lamp holders - ordered separately)

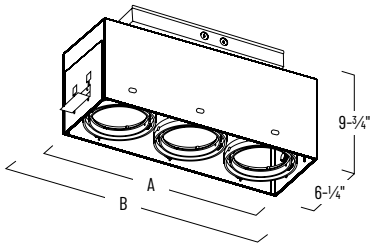

Dimensions	Length (A)	Length w/ Bracket (B)	Ceiling Cut-Out
1 Head	6-¼"	9-¾"	6-¼" x 6-¼"
2 Head	12-¼"	15"	12-¼" x 6-¼"
3 Head	18-½"	21"	18-½" x 6-¼"

Mud Plate (included)

Flange Kit (optional)

Frame-In for New Construction (optional)

Trimless Multiple Lighting Housing (Requires NMRT-652TL Lamp Holders)

Number of Heads	Finish
NMRTLI-11N1075 = 1 Head	**B** = Black
NMRTLI-12N1075 = 2 Heads	**W** = White
NMRTLI-13N1075 = 3 Heads	

Optional Accessories

Description

- **NMRTL-F1** = 1-Head Frame-In for New Construction
- **NMRTL-F2** = 2-Head Frame-In for New Construction
- **NMRTL-F3** = 3-Head Frame-In for New Construction
- **NMRTL-1FKB** = 1-Head Flange Kit, Black
- **NMRTL-1FKW** = 1-Head Flange Kit, White
- **NMRTL-2FKB** = 2-Head Flange Kit, Black
- **NMRTL-2FKW** = 2-Head Flange Kit, White
- **NMRTL-3FKB** = 3-Head Flange Kit, Black
- **NMRTL-3FKW** = 3-Head Flange Kit, White

Example: **NMRTLI-13N1075W** = Trimless Multiple (3) Head Housing, 120V input, 75W max. PAR30 per socket, White finish

NORA LIGHTING
6505 Gayhart Street, Commerce, CA 90040
TEL 323.767.2600 | www.noralighting.com | e-mail: nora@noralighting.com
© 2025 Nora Lighting, Inc. All rights reserved. Specifications subject to change without notice.

NMRT-652TL

PAR30 Lamp Holder for Trimless Multiple Lighting System (Housing required)
Source: PAR30
75W Max. (Can be factory labeled with reduced wattage)

Type
Project
Catalog No.
Notes

PRODUCT DESCRIPTION
PAR30 Lamp Holder for NMRTLI Trimless Multiple Lighting Housings. Adjustable socket accepts various lamp lengths. Lamp holder is compatible with most PAR30 LED and Halogen Lamps.

CONSTRUCTION
Lamp Holder: Die-cast aluminum reflector with ceramic medium base adjustable socket. Available in black or white finish.

Installation: Each lamp holder includes a quick connect that easily attaches to quick connect from the wiring compartment on the housing. Quick connects can be supplied with a single supply or individual supply line for independent control. Lamp holders simply twist and lock into housing, and specified in black or white.

ELECTRICAL
Input Voltage: 120V
Compatible Lamp: PAR30 LED or Halogen - long or short neck (not included)
Socket: Medium base
Wattage: 75W max. each socket (can be factory labeled for reduced wattage)
Operating Temp.: 0°-70°C max. ambient temp.
Dimming: Triac / ELV dimming

COMPATIBLE HOUSINGS

Catalog No.	Description
NMRTLI-11N	(1) Line Voltage MLS Housing
NMRTLI-12N	(2) Line Voltage MLS Housing
NMRTLI-13N	(3) Line Voltage MLS Housing

LABELS AND LISTINGS
- cULus Listed
- 5 Year Limited Warranty

PRODUCT IMAGES AND DIMENSIONS



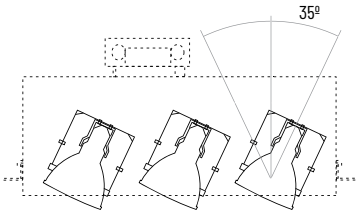

PAR30 Lamp Holder for Trimless Multiple Lighting Housings (Requires NMRTLI Housing)

Finish

- **NMRT-652TLBLK** = Black
- **NMRT-652TLWH** = White

Example: **NMRT-652TLWH** = PAR30 Lamp Holder for Trimless Multiple Lighting Housings, White finish

NORA LIGHTING
6505 Gayhart Street, Commerce, CA 90040
TEL 323.767.2600 | www.noralighting.com | e-mail: nora@noralighting.com
© 2025 Nora Lighting, Inc. All rights reserved. Specifications subject to change without notice.