

NMTD-60/24D / NMTD-96/24D

24V Class II Dimmable Hardwire Magnetic LED Driver w/Regulator for Constant Current & Voltage
Source: 120-277V Input / 24V Output
60W or 96W

PRODUCT DESCRIPTION

Class II fused constant voltage magnetic transformer for 24V LED lighting. Ideal for use in areas requiring reliable operation under stressful conditions.

FEATURES

- Fully dimmable, with low voltage magnetic dimmer
- NEC Class II Breaker Protection
- Resists spikes, surges, and all other power irregularities
- 24 Hour Operation, direct sunlight capable
- Dry location use only
- cULus Listed

SPECIFICATION

Construction: Steel housing constructed of 0.055 black finished metal. Two 1/2" knockouts allow for 120VAC-277VAC incoming power supply and 24VDC output.

Mounting: Knockouts provided in front of transformer allow fixture to be secured to wood, drywall, or sheet metal.

ELECTRICAL

Input Voltage: 120V-277V 60Hz

Output Voltage: 24V

Wattage: 60W (NMTD-60/24D) or 96W (NMTD-96/24D)

Maximum Distance: 50'

Dimming: Magnetic Low Voltage

RESET

In the event of one or more fuses cutting power due to overload/surge/short circuit, transformer provides simple push-button reset.

APPLICATIONS

Use for any application where noise free operation is required. Approved for use with all Nora Lighting low voltage tape light and low voltage under cabinet fixtures. High saturation core construction allows the NMTD to operate in environments unfriendly to standard electronic transformers. Unit may be exposed to direct sunlight, operate 24 hours per day, and is virtually blind to spikes, surges, brownouts, and other power irregularities and anomalies.

COMPATIBLE 24V SYSTEMS

- [NMP2-A](#): 24V Josh Adjustable
- [NMP2-LED](#): 24V Josh Fixed
- [NUTP5](#): 24V Hy-Brite Tape Light
- [NUTP8](#): 24V High Output Tape Light
- [NUTP9](#): 24V Side-Lit Tape Light
- [NUTP10](#): 24V CCT Color Changing Tape Light
- [NUTP14](#): 24V COB High Output Tape Light
- [NUTP15](#): 24V COB Standard Output Tape Light
- [NUTP51](#): 24V Continuous Hy-Brite Tape Light
- [NUTP71](#): 24V Continuous Standard Tape Light
- [NUTP81](#): 24V Continuous High Output Tape Light
- [NUTPCOB-RGBW](#): 24V RGBW Color Changing Tape Light
- [NULB-8](#): 24V Lightbar Silk SBC

OPTIONAL ACCESSORIES

- [NALTL-10](#): 10' Power Line Connector (included)
- [NALTL-30](#): 30' Power Line Connector
- [NATL-302W](#): Power Line Splitter, white cable. Splits power line connector into two separate connections.


LISTINGS AND WARRANTY

- cULus Listed
- NEC Class 2
- [3-Year Limited Warranty](#)



Type
Project
Catalog No.
Notes

PRODUCT IMAGE AND DIMENSIONS

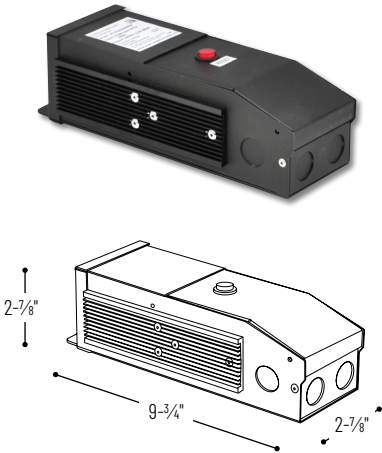

NMTD-60/24D / NMTD-96/24D
24V Class II Dimmable Hardwire Magnetic LED Driver



NALTL-10 / NALTL-30
Power Line Connector (10' included)



NATL-302W
Power Line Splitter

24V Class II Dimmable Hardwire Magnetic LED Drivers

Output Voltage / Wattage
NMTD-60/24D = 24V Output / 60W
NMTD-96/24D = 24V Output / 96W

Optional Accessories

Description
NALTL-10 = 10' Power Line Connector (included w/each driver)
NALTL-30 = 30' Power Line Connector
NATL-302W = Power Line Splitter, White

Example: **NMTD-60/24D** = 24V 60W Class II Dimmable Hardwire Magnetic LED Driver