

NRMC2-61 / NRMC2-62

6" Marquise II Retrofit Reflectors

Source: 15W LED
900lm

Type	
Project	
Catalog No.	
Notes	

PRODUCT DESCRIPTION

The Marquise II Retrofit Series replaces existing recessed trims and light sources. Series includes Cree® COB LED with optimized beam spreads, dimmable driver and medium base socket to replace old light sources with the latest LED technology.

FEATURES

- Retrofit existing architectural or commercial housings with the latest LED technology
- Over 80% energy savings when compared to incandescent
- Cree® COB LED Technology
- Spot, narrow or flood beam spreads
- 900lm LED package
- 2700K, 3000K, 3500K and 4000K @ 90+CRI
- 5-year Limited Warranty

CONSTRUCTION

Reflector: Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

Mounting: Trim includes friction blades to mount trim securely to housing.

ELECTRICAL

Lumens / Wattage: 900lm / 15W

Color Temperature: 2700K, 3000K, 3500K, 4000K

CRI: 90+CRI

Beam Spread: (S) Spot, (M) Narrow Flood, (F) Flood

Operating Temp.: 0°C to 45°C ambient temperature

Lifetime: 60,000 hours @ L70

Dimming: Dimmable down to 10% with Triac or ELV

[Click Here](#) or check complete dimmer list at

www.NoraLighting.com in the "Compatibility" page under "Resources" tab

COMPATIBLE HOUSINGS

Marquise retrofit reflectors are compatible with most 5" IC and Non-IC housings by Nora Lighting and others.

FIRE BOX

NFBIC-6LMRATA 6" IC Air-Tight Fire Rated Dedicated LED

NFBIC-6INCATA 6" IC Air-Tight Fire Rated Line Voltage

NEW CONSTRUCTION

NHIC-6LMRAT 6" IC Air-Tight Dedicated LED

NHIC-17QAT 6" IC Air-Tight Line Voltage

NHIC-17QNBAT 6" IC Air-Tight Line Voltage (No bracket)

NH-26Q 6" Non-IC Line Voltage

NHIC-6G24ATFL 6" IC Air-Tight GU24

REMODEL

NHRIC-6LMRAT 6" IC Air-Tight Dedicated LED

NHRIC-17QAT 6" IC Air-Tight Line Voltage

NHRIC-17QNBAT 6" IC Air-Tight Line Voltage (No bracket)

NHR-26Q 6" Non-IC Line Voltage

NHRIC-6G24ATFL 6" IC Air-Tight GU24


Retrofit: Marquise retrofit series includes medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

LABELS AND LISTINGS

- cULus classified for Wet Location when used with compatible housing
- ENERGY STAR® certified
- [5-Year Limited Warranty](#)
- ASTM E283 for Air-Tight
- FCC compliant




PRODUCT IMAGES AND DIMENSIONS

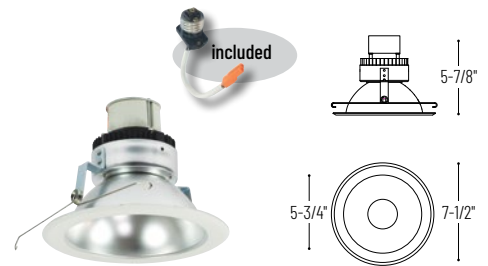

NRMC2-61

Round Open Reflector

BB, BW, BZ, CO, DB, DD, DW, HZ, HZW, MPW, NN, WW

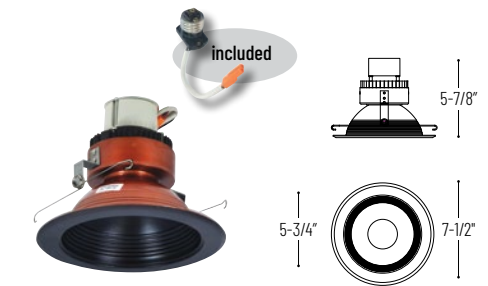

NRMC2-62

Round Baffle

BW, BZ, CO, MPW, NN, WW

6" Marquise II Retrofit Reflector

Reflector Type	Lumens / Wattage	Color Temp. / CRI	Beam Spread	Finish (see chart below)
NRMC2-61 = Round Open Reflector	L09 = 900lm / 15W	27 = 2700K / 90 CRI	S = Spot	BB = Black / Black Flange
NRMC2-62 = Round Baffle		30 = 3000K / 90 CRI	M = Medium	BW = Black / White Flange
		35 = 3500K / 90 CRI	F = Flood	BZ = Bronze / Bronze Flange
		40 = 4000K / 90 CRI		CO = Copper / Copper Flange
				DB = Diffused Clear / Black Flange
				DD = Diffused Clear / Diffused Flange
				DW = Diffused Clear / White Flange
				HZ = Haze / Haze Flange
				HZW = Haze / White Flange
				MPW = Matte Powder White
				NN = Natural Metal / Natural Metal Flange
				WW = White / White Flange

Optional Accessories

Description
NRA-211SM = Medium base screw-in socket (included)
NRA-212SM = Socket adapter for use with GU24 housings

Available Finishes

	BB	BW	BZ	CO	DB	DD	DW	HZ	HZW	MPW	NN	WW
61
62

Example: **NRMC2-61L0930WW** = 6" Marquise II Round Open Retrofit Reflector, 900lm / 15W LED, 3000K, White Reflector / White Flange