

# NTH-REV150

## REVO Motorized Universal Track Head

Source: 90W PAR20, PAR30 or PAR38 max.

Type \_\_\_\_\_

Project \_\_\_\_\_

Catalog No. \_\_\_\_\_

Notes \_\_\_\_\_

### PRODUCT DESCRIPTION

Track head with a motorized horizontal and vertical axis can be adjusted from far below or across the room with patented remote control. The utilitarian style fits almost any design criteria. Die-cast aluminum housing and durable components are backed by a 5 year limited warranty.

### FEATURES

- Universal E26 base lamp holder accepts any PAR lamp
- Compact design
- Dome-shaped laser target for lamp selection
- Dome illuminates to indicate the track head will respond to radio commands
- Radio signals control the fixture - no need to aim the transmitter while adjusting
- Clutch backed gears allow for hand adjustment without transmitter
- 340° rotation in horizontal axis; 200° in vertical axis
- Powerful motors move the heaviest LED PAR lamps
- Dimmable: Motors will adjust even when track is dimmed
- Die-cast aluminum housing; powder coated
- One or two circuit track capable
- Only one transmitter required for any number of REVO fixture

### CONSTRUCTION

**Housing:** Die-cast aluminum with powder coat finish.

**Adjustability:** 340° horizontal and 200° vertical adjustment.

**Contact Head Assembly:** Three 0.030 stainless steel contacts mounted in premium plastic housing.

**One/Two Circuit Conversion:** Positive contact (opposite neutral and ground contacts) is preset to "down" position at the factory, but may be raised to the high position to install onto the second circuit of Nora Lighting's NT-2300 series two-circuit track.

### ELECTRICAL SYSTEM

**Input Voltage:** 120V

**Socket:** Medium Base

**Maximum Wattage:** 90W

**Lamp Type:** Incandescent or LED PAR20, PAR30 or PAR38

### ONE / TWO CIRCUIT CONVERSION


Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory, but may be raised to the higher position to install onto the second circuit of Nora Lighting NT-2300 series two-circuit track.

### LABELS AND LISTINGS

- cULus Listed for Damp Locations
- 5-Year Limited Warranty




### PRODUCT IMAGES AND DIMENSIONS

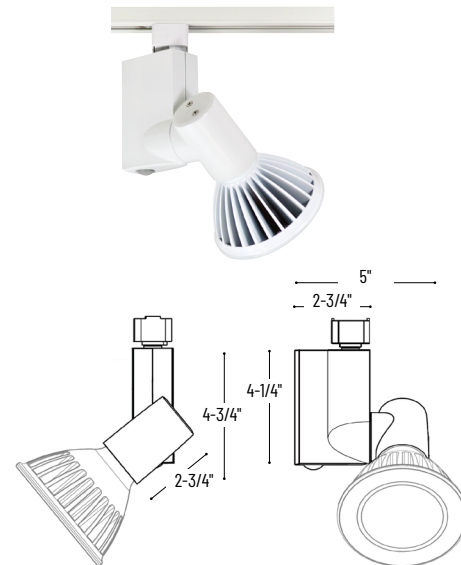

### LAMP SPEC

Suitable for 90W medium base Reflector type lamp. Neck for lamp cannot exceed 1.75" in diameter socket bottom is 2" from top of socket cup. (Requires a long-neck PAR Lamp)



**Input:** 2x AAA Batteries  
**Radio Transmitter:** 433.92 MHz  
**Laser Max Output:** <5mW  
**Laser Wavelength:** 630-660 nm  
**Weight:** 1.8 oz. (45 g.)  
**Dimensions:** 3.8" x 1.9" x 0.5"  
**FCC certified**

### REVO Motorized Universal Track Head

Catalog No. \_\_\_\_\_

**NTH-REV150W** = REVO Motorized Universal Track Head, White

### Optional Accessory

Description \_\_\_\_\_

**NTH-REVHHR** = Handheld Transmitter

Example: **NTH-REV150W** = REVO Motorized Universal Track Head, White