

NTL-215/75B
MR16 Low Voltage Mini Die-Cast Track Head
Lamp: 20W - 75W Halogen MR16

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION
Low voltage die cast aluminum designer cube fixtures with MR16 light source. Yoke provides full adjustment of light source for special aiming and dual tightening knobs assure secure lock on angle position.

- FEATURES**
- Die cast aluminum provies superior strength and rigidity
 - Low profile, aesthetic design
 - Adjustable yoke for custom aiming
 - Clear shield included with fixture
 - High-strength stainless steel electrical contacts
 - One or two circuit track capable

CONSTRUCTION
Contact Head Assembly: Three .030 stainless steel contacts mounted in high heat rated plastic housing.

Housing: .030 Die-cast aluminum construction; cubical appearance and design features. All edges are softened for aesthetic appearance. Perforated spherical screen in rear functions as wire outlet and provides additional design benefit.

Yoke: 0.85 Rigid steel yoke connects fixture housing to electrical contact head. Dual plastic angle tightening knobs maintain clean, decorative appearance of the fixture and provides secure angle position.


ELECTRICAL
Input Voltage: 120V 60Hz
Output Voltage: 12V 6.25A
Socket: GU5.3 porcelain socket
Transformer: Solid state electronic transformer provides noise-free voltage reduction and operation.
Lamp: 20W - 75W 12V Halogen MR16 (not included). **Note:** Do not use provided glass lens when MR16 lamp already comes with lens.
Dimming: ELV

ONE/TWO CIRCUIT CONVERSION
Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory but may be raised to the higher position to install onto the second circuit of Nora Lighting NT- 2300 series two-circuit track.

LABELS AND LISTINGS
UL Listed



PRODUCT IMAGES AND DIMENSIONS

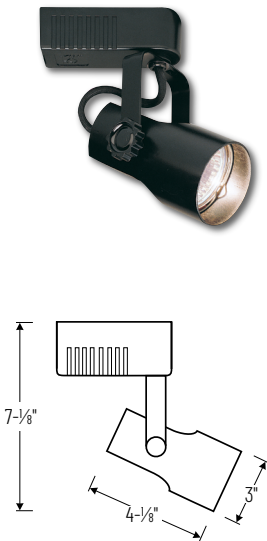

MR16 Low Voltage Mini Die-Cast Track Head

Finish
NTL-215/75B = Black

Example: NTL-215/75B = MR16 Low Voltage Mini Die-Cast Track Head, Black Finish