


**NS-25
Frosted Dome Lens with Metal Trim**

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS



Trim OD: 5"
Height: 2-1/8"




FEATURES

- Trim**
High grade frosted dome lens attached to metal trim.
- Mounting**
Trim includes three trim clips that securely mount trim in housing.
- Compatible Housings**
Compatible with Line Voltage housings.
See individual specification sheets for more information.

- Lamp**
Line Voltage
50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings
cULus Listed for Wet Location when used with compatible housing.

HOUSING DIMENSIONS

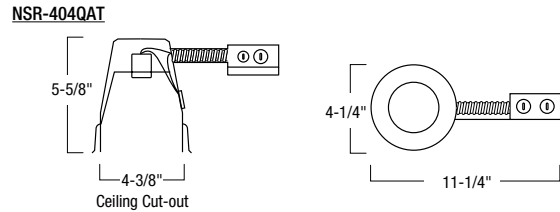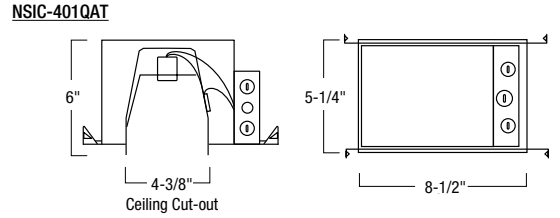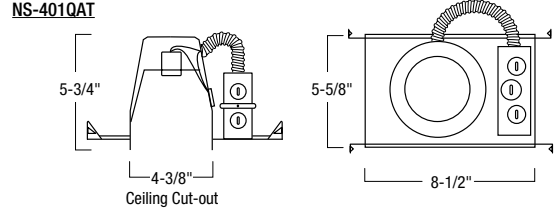

Frosted Dome Lens with Metal Trim

- NS-25B: Frosted Dome Lens with Black Metal Trim
- NS-25BZ: Frosted Dome Lens with Bronze Metal Trim
- NS-25C: Frosted Dome Lens with Chrome Metal Trim
- NS-25CO: Frosted Dome Lens with Copper Metal Trim
- NS-25G: Frosted Dome Lens with Gold Metal Trim
- NS-25N: Frosted Dome Lens with Natural Metal Trim
- NS-25W: Frosted Dome Lens with White Metal Trim

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"