


NS-57
Specular Cross Louver with
Specular Reflector and Ring

Type _____
 Project _____
 Catalog No. _____
 Lamp/Wattage _____

TRIM DIMENSIONS



Trim OD: 5"
 Aperture: 3-1/2"
 Height: 2-3/4"

FEATURES

Trim
 Precision spun 0.050 aluminum high grade reflector. Specular cross louver provides 50% visual cutoff to lamp. Separate trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.




Mounting
 Trim includes three trim clips that securely mount trim in housing.

Compatible Housings
 Compatible with Line Voltage housings.
 See individual specification sheets for more information.

Lamp
 Line Voltage
 50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings
 cULus Listed for Damp Location when used with compatible housing.

HOUSING DIMENSIONS

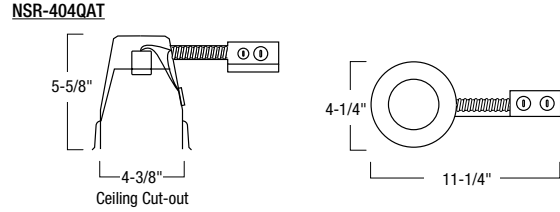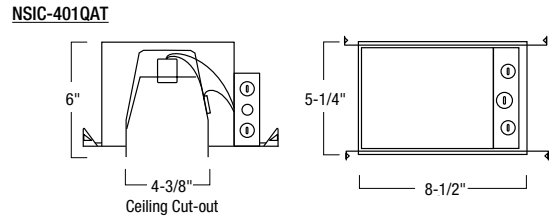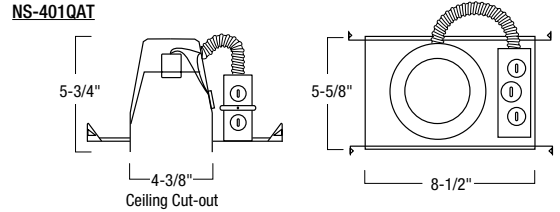

Specular Cross Louver with Specular Reflector and Ring

- NS-57CW: Specular Clear Cross Louver with Specular Clear Reflector, White Metal Ring
- NS-57GW: Specular Gold Cross Louver with Specular Gold Reflector, White Metal Ring

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"