


NT-641
Stepped Baffle with White Metal Trim

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS

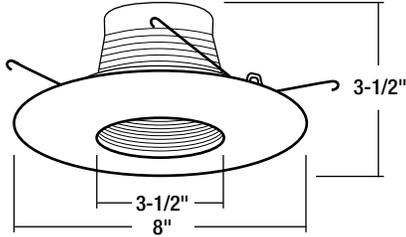

Trim OD: 8"
 Aperture: 3-1/2"
 Height: 3-1/2"

FEATURES

Trim
 Precision spun 0.040 aluminum with deep grooves to reduce aperture glare. Non-reflective painted finishes.

Mounting
 Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).


Compatible Housings
 Compatible with shallow, standard, and IC Line Voltage housings listed below. See individual specification sheets for more information.

Lamp
 50W R20 Maximum
 50W PAR20 Maximum


Labels and Listings
 cULus Listed for Damp Location when used with compatible housing

HOUSING DIMENSIONS


NH-26Q / NHIC-17QAT

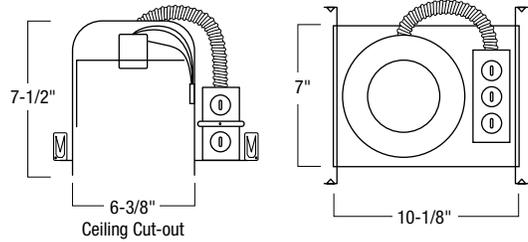


NH-27Q / NHIC-27QAT

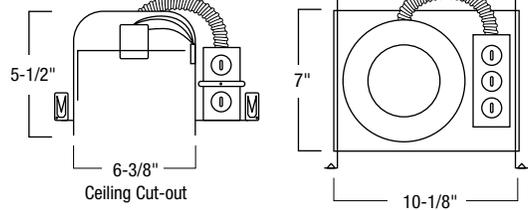


NHIC-17/100DWQA

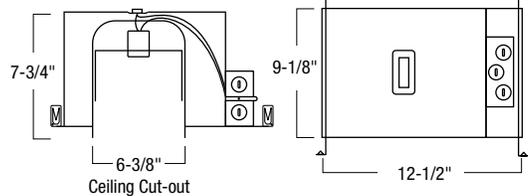

NHR-26Q / NHRIC-17QAT

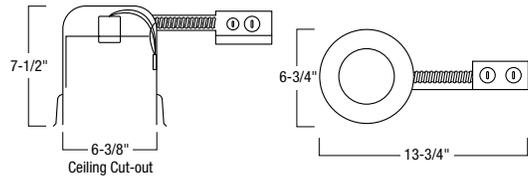

NHR-27Q / NHRIC-27QAT

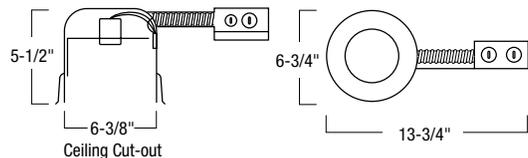

Stepped Baffle with White Metal Trim

Compatible Housings

Item Number	Installation Type	LINE VOLTAGE	
		Lamp	Dimensions
NH-26Q	Non-IC New Construction	50W R20/PAR20 Max.	W: 7" L: 10-1/8" H: 7-1/2"
NH-27Q	Non-IC Shallow New Construction	50W R20/PAR20 Max.	W: 7" L: 10-1/8" H: 5-1/2"
NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction	50W R20/PAR20 Max.	W: 9-1/8" L: 12-1/2" H: 7-3/4"
NHIC-17QAT	IC Air-Tight New Construction	50W R20/PAR20 Max.	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-27QAT	IC Air-Tight Shallow New Construction	50W R20/PAR20 Max.	W: 7" L: 10-1/8" H: 5-1/2"
NHR-26Q	Non-IC Remodel Housing	50W R20/PAR20 Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHR-27Q	Non-IC Shallow Remodel Housing	50W R20/PAR20 Max.	W: 6-3/4" L: 13-3/4" H: 5-1/2"
NHRIC-17QAT	IC Air-Tight Remodel Housing	50W R20/PAR20 Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-27QAT	IC Air-Tight Shallow Remodel Housing	50W R20/PAR20 Max.	W: 6-3/4" L: 13-3/4" H: 5-1/2"