


Type
Project
Catalog No.
Lamp/Wattage

## NTM-48 / NTM-49 Stepped Baffle with Regressed Eyeball

### TRIM DIMENSIONS

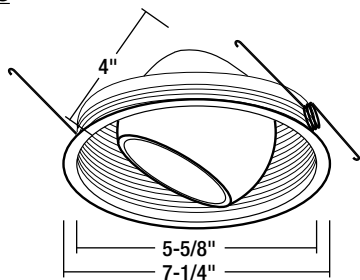

Trim OD: 7-1/4"  
Aperture: 5-5/8"  
Eyeball Height: 4"

### FEATURES

#### Trim

Precision spun 0.040 baffle with deep grooves to reduce aperture glare. Metal trim with adjustable eyeball can be rotated 358° horizontally and 15° vertically. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

#### Mounting

Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Remove socket from socket plate within housing (if applicable), and mount socket on eyeball.

#### Compatible Housings

Compatible with Line Voltage and GU24 housings.  
See individual specification sheets for more information.

#### Lamp

##### Line Voltage

75W BR/PAR30 Maximum (NH-26Q; NH-26QNB; NH-27Q; NHIC-17/100DWQA; NHIC-17QAT, NHIC-17QNBAT; NHIC-27QAT; NHR-26Q; NHR-27Q; NHRIC-17QAT; NHRIC-17QNBAT; NHRIC-27QAT)

##### GU24 Compact Fluorescent

15W R30 GU24 (NHIC-6G24ATFL; NHRIC-6G24ATFL)

#### Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

### Compatible Housings

LINE VOLTAGE		
Item Number	Installation Type	Dimensions
NH-26Q	Non-IC New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NH-26QNB	Non-IC New Construction - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
NH-27Q	Non-IC Shallow New Construction	W: 7" L: 10-1/8" H: 5-1/2"
NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction	W: 9-1/8" L: 12-1/2" H: 7-3/4"
NHIC-17QAT	IC Air-Tight New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17QNBAT	IC Air-Tight New Const. - No Bracket	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-27QAT	IC Air-Tight Shallow New Construction	W: 7" L: 10-1/8" H: 5-1/2"
NHR-26Q	Non-IC Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHR-27Q	Non-IC Shallow Remodel Housing	W: 6-3/4" L: 13-3/4" H: 5-1/2"
NHRIC-17QAT	IC Air-Tight Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QNBAT	IC Air-Tight Remodel - No Bracket	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-27QAT	IC Air-Tight Shallow Remodel Housing	W: 6-3/4" L: 13-3/4" H: 5-1/2"
GU24 COMPACT FLUORESCENT		
NHIC-6G24ATFL	IC Air-Tight New Construction	W: 7" L: 10-1/8" H: 7-1/2"
NHRIC-6G24ATFL	IC Air-Tight Remodel Housing	W: 6-3/4" L: 13-3/4" H: 7-1/2"

### Stepped Baffle with Regressed Eyeball

- NTM-48: Black Phenolic Baffle with White Regressed Eyeball and White Plastic Ring
- NTM-48BB: Black Phenolic Baffle with Black Regressed Eyeball and Black Plastic Ring
- NTM-49: White Phenolic Baffle with White Regressed Eyeball and White Plastic Ring
- NTM-49BZ: Bronze Baffle with Bronze Regressed Eyeball and Bronze Metal Ring
- NTM-49CO: Copper Baffle with Copper Regressed Eyeball and Copper Metal Ring
- NTM-49N: Natural Metal Baffle with Natural Metal Regressed Eyeball and Natural Metal Ring