


NTP-30 / NTP-31 BR/PAR30 Phenolic (Plastic) Stepped Baffle with White Plastic Ring

TRIM DIMENSIONS

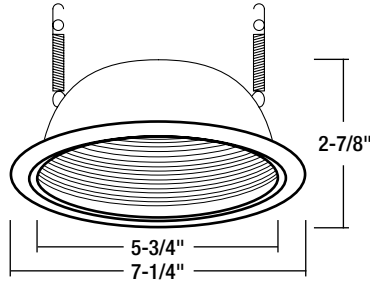

Trim OD: 7-1/4"
Aperture: 5-3/4"
Height: 2-7/8"

FEATURES

Trim

Precision spun 0.040 plastic with deep grooves to reduce aperture glare and plastic trim ring. Non-reflective painted finishes. Trim may also be used with custom combination of ring finishes.

Mounting

Trim includes two coil springs that clip and securely hold the trim into the housing when installed.. Replacement coil springs are available (NRA-22).

Compatible Housings

Compatible with shallow, standard, and IC Line Voltage housings listed below. See individual specification sheets for more information.

Lamp

75W BR/PAR30 Maximum (NH-26Q; NH-27Q; NHIC-17QAT; NHIC-17/100DWQA; NHIC-27QAT
NHR-26Q; NHR-27Q; NHRIC-17QAT; NHRIC-27QAT)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing

Phenolic Stepped Baffle with White Plastic Ring

- NTP-30: Black Phenolic Stepped Baffle with White Plastic Ring
- NTP-31: White Phenolic Stepped Baffle with White Plastic Ring

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NH-26Q / NHIC-17QAT

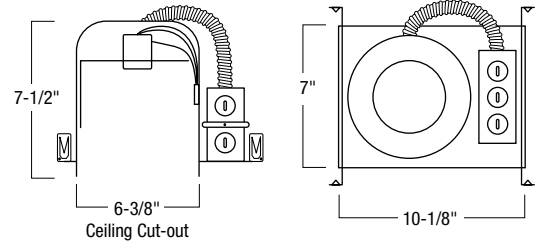


NH-27Q / NHIC-27QAT

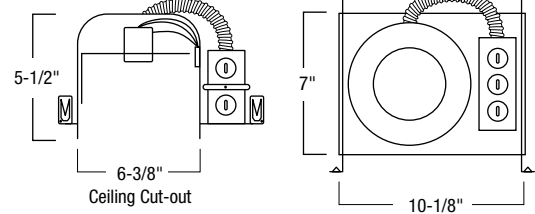


NHIC-17/100DWQA

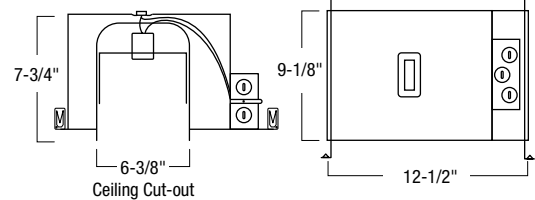

NHR-26Q / NHRIC-17QAT

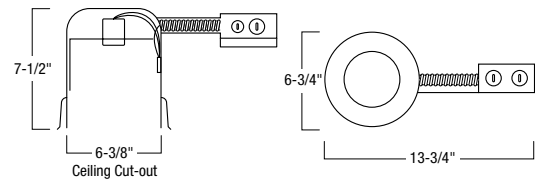

NHR-27Q / NHRIC-27QAT

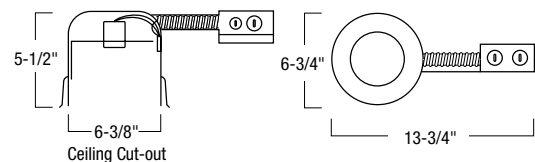

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp
NH-26Q	Non-IC New Construction	50W BR/PAR30 Max.
NH-27Q	Non-IC Shallow New Construction	50W BR/PAR30 Max.
NHIC-17/100DWQA	IC Double Wall Air-Tight New Construction	50W BR/PAR30 Max.
NHIC-17QAT	IC Air-Tight New Construction	50W BR/PAR30 Max.
NHIC-27QAT	IC Air-Tight Shallow New Construction	50W BR/PAR30 Max.
NHR-26Q	Non-IC Remodel Housing	50W BR/PAR30 Max.
NHR-27Q	Non-IC Shallow Remodel Housing	50W BR/PAR30 Max.
NHRIC-17QAT	IC Air-Tight Remodel Housing	50W BR/PAR30 Max.
NHRIC-27QAT	IC Air-Tight Shallow Remodel Housing	50W BR/PAR30 Max.