


NTS-22

Albalite Lens with Specular Reflector and Trim

TRIM DIMENSIONS

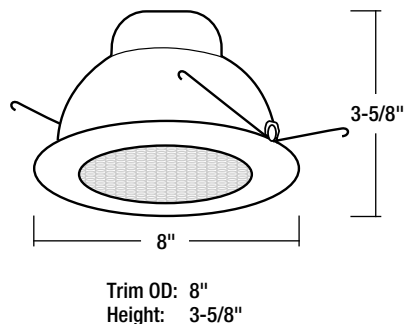

FEATURES

Trim

High grade albalite lens attached to a metal trim. Precision spun 0.050 aluminum high grade specular clear reflector.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86).

Compatible Housings

Compatible with Line Voltage and HID housings.
See individual specification sheets for more information.

Note: Add suffix "/QS" when using with quartz restrike housing.

Lamp

Line Voltage

40W A19 Max. (NH-27Q; NHIC-17QAT; NHIC-27QAT; NHR-27Q; NHRIC-17QAT; NHRIC-27QAT)

60W A19 Maximum (NH-26Q; NHIC-17/100DWQA; NHR-26Q)

HID

50W ED17 CMH (NHPM-750/EL; NHRPM-750/EL)

70W ED17 CMH (NHPM-770/EL; NHRPM-770/EL)

Labels and Listings

cULus Listed for Wet Location when used with compatible housing

Albalite Lens with Specular Clear Reflector and Trim

- NTS-22: Albalite Lens with Specular Clear Reflector and White Metal Trim
- NTS-22B: Albalite Lens with Specular Clear Reflector and Black Metal Trim
- NTS-22BZ: Albalite Lens with Specular Clear Reflector and Bronze Metal Trim
- NTS-22C: Albalite Lens with Specular Clear Reflector and Chrome Metal Trim
- NTS-22CO: Albalite Lens with Specular Clear Reflector and Copper Metal Trim
- NTS-22G: Albalite Lens with Specular Clear Reflector and Gold Metal Trim
- NTS-22N: Albalite Lens with Specular Clear Reflector and Natural Metal Trim

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NH-26Q / NHIC-17QAT

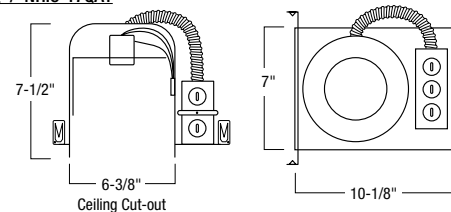


NHIC-17/100DWQA

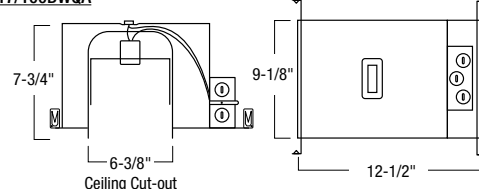


NHR-26Q / NHRIC-17QAT

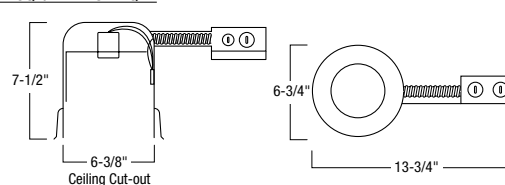

NHPM-750/EL / NHPM-770/EL

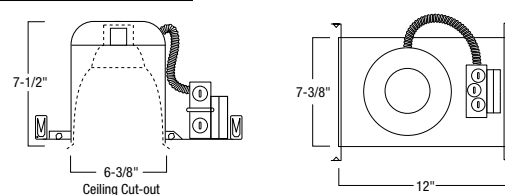

NHRPM-750/EL / NHPM-770/EL

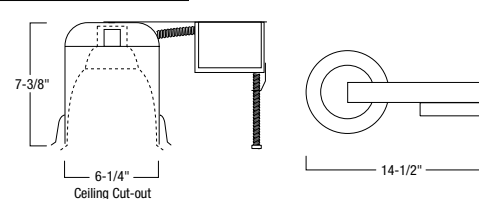

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NH-26Q	Non-IC New Construction	100W A19 Max.	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17/100DWQA	IC Double Wall Air-Tight NC	100W A19 Max.	W: 9-1/8" L: 12-1/2" H: 7-3/4"
NHIC-17QAT	IC Air-Tight New Construction	60W A19 Max.	W: 7" L: 10-1/8" H: 7-1/2"
NHR-26Q	Non-IC Remodel Housing	100W A19 Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QAT	IC Air-Tight Remodel Housing	60W A19 Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"

HID

NHPM-750/EL	Non-IC New Construction	50W ED17	W: 7-5/8" L: 12" H: 7-1/2"
NHPM-770/EL	Non-IC New Construction	70W ED17	W: 7-5/8" L: 12" H: 7-1/2"
NHRPM-750/EL	Non-IC Remodel Housing	50W ED17	W: 6" L: 14-1/2" H: 7-3/8"
NHRPM-770/EL	Non-IC Remodel Housing	70W ED17	W: 6" L: 14-1/2" H: 7-3/8"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com