


NL-3433

3" Square Round Baffle Wet Label
35° Adjustable

TRIM DIMENSIONS

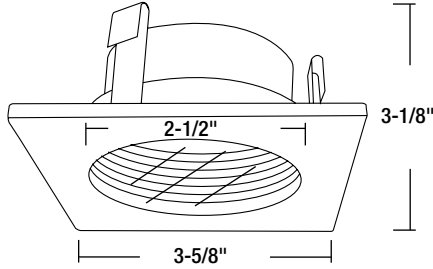

Width/Length: 3-5/8" Height: 3-1/8" Aperture: 2-1/2"

FEATURES

Trim

3" die cast aluminum flange provides sharp clean corners. Non-reflective painted finishes and square trim. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Mounting

Trim includes three trim clips that securely mount trim in housing.

Compatible Housings

Compatible with Line Voltage and Low Voltage housings.

Lamp

Low Voltage: 20-50W MR16, VERSA 3-50W 12 MR16 LED, or Halogen MR16
Line Voltage: 50W Max 120V MR16 GU10 or LED

Important: Do Not use glass lens (provided) when already using lamp with glass cover

Labels and Listings

cULus Listed for Wet Location when used with compatible housing.



3" Square Round Baffle Wet Label Trim

- NL-3433BB: 3" Square Round Wet Label, Black Baffle, Black Flange
- NL-3433BW: 3" Square Round Wet Label, Black Baffle, White Flange
- NL-3433BZ: 3" Square Round Wet Label, Bronze Refl Baffle, Bronze Flange
- NL-3433NN: 3" Square Round Wet Label, Natural Metal Baffle, Natural Metal Flange
- NL-3433WW: 3" Square Round Wet Label, White Baffle, White Flange

Type

Project

Catalog No.

Lamp/Wattage

Compatible Housings

LOW VOLTAGE

New Construction IC Housing

- NLIC-301QAT/20 3" IC Air-Tight Low Voltage Housing, 20W Max, 120V Magnetic
- NLIC-301QAT/37 3" IC Air-Tight Low Voltage Housing, 37W Max, 120V Magnetic
- NLIC-301QAT 3" IC Air-Tight Low Voltage Housing, 50W Max, 120V Magnetic
- NLIC-301AT/1EL 3" IC Air-Tight Low Voltage Housing, LED Compatible 3-50W 120V Electronic
- NLIC-301AT/(lamp)* 3" IC Air-Tight Low Voltage Housing with LED Lamp

New Construction Non-IC Housing

- NL-301QAT/20 3" Air-Tight Low Voltage Quick Connect Housing, 20W Max, 120V Magnetic
- NL-301QAT/37 3" Air-Tight Low Voltage Quick Connect Housing, 37W Max, 120V Magnetic
- NL-301QAT 3" Air-Tight Low Voltage Quick Connect Housing, 50W Max, 120V Magnetic
- NL-301AT/1EL 3" Air-Tight LV Quick Connect Housing, LED Compatible 3-50W 120V Electronic
- NL-301AT/(lamp)* 3" Air-Tight Low Voltage Quick Connect Housing with LED Lamp

Remodel Non-IC Housing

- NLR-304QAT/20 3" Air-Tight Low Voltage Remodel Housing, 20W Max, 120V Magnetic
- NLR-304QAT/37 3" Air-Tight Low Voltage Remodel Housing, 37W Max, 120V Magnetic
- NLR-304QAT 3" Air-Tight Low Voltage Remodel Housing, 50W Max, 120V Magnetic
- NLR-304AT/1EL 3" Air-Tight LV Remodel Housing, LED Compatible 3-50W 120V Electronic
- NLR-304AT/(lamp)* 3" Air-Tight Low Voltage Remodel Housing with LED Lamp

Remodel Non-IC Housing for Remote Transformer

- NLR-305AT/20 3" Air-Tight Remodel Housing for Remote Transformer, 20W Max
- NLR-304QAT/37 3" Air-Tight Remodel Housing for Remote Transformer, 37W Max
- NLR-304QAT 3" Air-Tight Remodel Housing for Remote Transformer, 50W Max

*MR16 LED Lamp Option

- /E01 LED MR16 7Watt 27K Spot (25°) 50 Watt Equall
- /E02 LED MR16 7Watt 27K Flood (35°) 50 Watt Equall
- /E03 LED MR16 7Watt 30K Spot (25°) 50 Watt Equall
- /E04 LED MR16 7Watt 30K Flood (35°) 50 Watt Equall

LINE VOLTAGE

Double Wall New Construction IC Housing

- NHIC-350AT 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 50W Max
- NHIC-350AT/20 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 20W Max
- NHIC-350AT/10 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 10W Max

New Construction Non-IC Housing

- NH-350AT 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 50W Max
- NH-350AT/20 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 20W Max
- NH-350AT/10 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 10W Max

Remodel Non-IC Housing

- NHR-354AT 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 50W Max
- NHR-354AT/20 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 20W Max
- NHR-354AT/10 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 10W Max