

# NLOCAC

## CAMO Tunable White LED Surface Mount Luminaire

Source: 12W to 24W LED  
700lm to 1700lm

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

The CAMO Series is a thin 1/2" surface mounted luminaire with an integral tunable CCT switch. Luminaire is available in 6", 8" or 11" sizes and mounts easily over a standard or fire rated junction boxes. Optional black, brushed nickel, chrome or matte powder white rings are available.

### FEATURES

- Selectable CCT (3000K, 4000K or 5000K @ 90+ CRI)
- Surface mounted or retrofit into existing recessed housings with torsion spring kit (ordered separately)
- Available in three sizes (6", 8" or 11")
- Dimmable with Triac or ELV dimmers
- Integral magnet allows optional finish ring to attach seamlessly\*
- Metal rings offered in black, brushed nickel, chrome or matte powder white
- 5-year limited warranty

### SPECIFICATION

**Construction:** Surface mounted luminaire includes integral driver and magnet for decorative rings. Optional metal rings are available in black, brushed nickel, chrome or matte powder white (ordered separately).

**Mounting:** Steel bracket can be used to surface mount on junction box. Optional torsion springs are available for retrofitting 5" or 6" recessed housings.

**Tunable White:** Each luminaire includes a color temperature switch on the back of the fixture. Toggle the switch to change the temperature from 3000K to 4000K or 5000K.

### ELECTRICAL

**Input Voltage:** 120V

**Lumens / Wattage:**

**6"** = 700lm / 12W; **8"** = 1100lm / 18W; **11"** = 1700lm / 24W

**Color Temperature:** 3000K [WW], 4000K [NW] or 5000K [CW] (each luminaire includes a CCT switch)

**CRI:** 90+ CRI

**Operating Temperature:** 0-45°C

**Dimming:** Triac or ELV

[Click Here](#) or check complete dimmer list at [www.NoraLighting.com](http://www.NoraLighting.com) in the "Compatibility" page under "Resources" tab

### ACCESSORIES

**Decorative Rings:** Luminaire includes an integral magnet to mount optional decorative rings seamlessly. Finishes include black, brushed nickel, chrome or matte powder white in 6", 8" or 11" sizes.

\* Optional decorative rings are held in place with integral magnets. Installations that might have heavy vibrations should be tested.


**NLOCAC-681TRECKIT:** Luminaire can be mounted to a 5" or 6" recessed housings with torsion spring brackets using optional torsion spring kit.

### LABELS AND LISTINGS


- cETLus Listed for Damp Location
- ENERGY STAR® certified
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2019
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1).




### PRODUCT IMAGES & DIMENSIONS



**NLOCAC-6R345W**  
6" CAMO

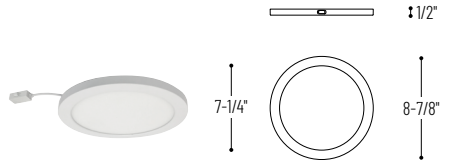

**NLOCAC-8R345W**  
8" CAMO

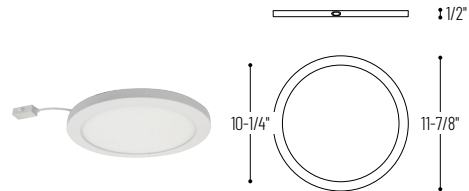

**NLOCAC-11R345W**  
11" CAMO



Decorative Ring Accessories

### CAMO Tunable White LED Surface Mount Luminaire

Luminaire Size	Color Temperature	Finish
<b>NLOCAC-6R</b> = 6" Round	<b>345</b> = 3000K, 4000K, 5000K	<b>W</b> = White
<b>NLOCAC-8R</b> = 8" Round		
<b>NLOCAC-11R</b> = 11" Round		

### Optional Accessories

Description	Decorative Ring Finish
<b>NLOCAC-6R</b> = 6" Decorative Ring	<b>B</b> = Black
<b>NLOCAC-8R</b> = 8" Decorative Ring	<b>BN</b> = Brushed Nickel
<b>NLOCAC-11R</b> = 11" Decorative Ring	<b>CH</b> = Chrome
	<b>MPW</b> = Matte Powder White
<b>NLOCAC-681TRECKIT</b> = Torsion Spring Kit	

Example: **NLOCAC-8R345W** = 8" CAMO Tunable White LED Surface Mount Luminaire, White finish

# PHOTOMETRICS

## CAMO Tunable White LED Surface Mount Luminaire

Type


Project

Catalog No.

Notes

### Test Information

Test Number: NTS100  
 Part Number: NLOCAC-6R345W  
 Lumens: 713lm  
 Wattage: 11.3W  
 Efficacy: 63lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180): 1.28  
 Spacing Criteria (90°-270): 1.28



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	15fc	12'-5"
6'	6.7fc	18'-8"
8'	3.7fc	24'-11"
10'	2.4fc	31'-1"
12'	1.7fc	37'-4"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	188	26.3
0-40	308	43.3
0-60	550	77.2
0-90	708	99.4
90-180	5	0.6
0-180	713	100

### Candela Table

Vertical Angles	Candela
0	240
5	2239
15	231
25	216
35	193
45	164

### Test Information

Test Number: NTS101  
 Part Number: NLOCAC-8R345W  
 Lumens: 978lm  
 Wattage: 16.4W  
 Efficacy: 60lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180): 1.28  
 Spacing Criteria (90°-270): 1.28



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	20.5fc	12'-7"
6'	9.1fc	18'-10"
8'	5.1fc	25'-1"
10'	3.3fc	31'-5"
12'	2.3fc	37'-8"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	257	26.2
0-40	422	43.2
0-60	754	77.1
0-90	972	99.3
90-180	6	0.7
0-180	978	100

### Candela Table

Vertical Angles	Candela
0	328
5	327
15	317
25	296
35	265
45	226

### Test Information

Test Number: NTS105  
 Part Number: NLOCAC-11R345W  
 Lumens: 1509lm  
 Wattage: 21.4W  
 Efficacy: 71lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180): 1.28  
 Spacing Criteria (90°-270): 1.28



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	31.5fc	12'-6"
6'	14fc	18'-10"
8'	7.9fc	25'-1"
10'	5fc	31'-5"
12'	3.5fc	37'-7"

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	395	26.1
0-40	650	43
0-60	1160	76.9
0-90	1496	99.1
90-180	14	0.9
0-180	1509	100

### Candela Table

Vertical Angles	Candela
0	504
5	503
15	486
25	455
35	408
45	347