

FIRE RATED HOUSINGS

LED Dedicated & Line Voltage

Nora's redesigned 2 hour fire-rated housing is lighter in weight and smaller in size. Specification grade fire-rated new construction housing. The double wall fixture incorporates a non-combustible fiber insulation to prevent passage of flames, toxic gases, ignitable gasses into ceiling plenums. The cULus listed housing is rated for a minimum of two hours protection. Suitable for commercial, multi-family and residential applications.



FEATURES

- Weighs 5.2 lbs
- Rated for direct contact with insulation
- cULus classified Two Hour Fire Rating
- 24-1/2" Bar hangers with captive nails & alignment feet
- Accommodates 1-3/4" maximum ceiling thickness
- cULus Classified for Two Hour Fire Rating
- cULus Listed for Wet Locations when used with compatible reflectors
- Meets or exceeds ASTM E283 Air-Tight requirements
- Compatible with Nora Lighting's LED retrofit and surface mounts luminaires



LED Dedicated Fire Rated Housings

| Aperture | Part Number |
|----------|---------------|
| 4" | NFBIC-4LMRATA |
| 5" | NFBIC-5LMRATA |
| 6" | NFBIC-6LMRATA |

Line Voltage Fire Rated Housings

| Aperture | Part Number |
|----------|---------------|
| 4" | NFBIC-4INCATA |
| 5" | NFBIC-5INCATA |
| 6" | NFBIC-6INCATA |

FIRE RATED HOUSING 4", 5" & 6" LED DEDICATED

CATALOG NO. / DESCRIPTION

NFBIC-4LMRATA 4" LED Dedicated, 120/277V input
NFBIC-5LMRATA 5" LED Dedicated, 120/277V input
NFBIC-6LMRATA 6" LED Dedicated, 120/277V input

Options:
/4W - Triac/ELV/0-10V dimming (Cobalt only - LE4 required)
/PEM - Pre-Wired for Remote Emergency (Cobalt only - EM required)
/6WPEM - Triac/ELV/0-10V dimming & Pre-Wired for Remote Emergency (Cobalt only - LE4EM required)

Ex: **NFBIC-6LMRATA/6WPEM** - 6" LED Dedicated Fire Rated Housing, 120/277V input;
 Triac/ELV/0-10V dimming and Pre-Wired for Remote Emergency
 Compatible with Nora 4" Iolite Retrofit, PRISM, Cobalt Retrofit, Onyx, AC Opal and CAMO Series

FIRE RATED HOUSING 4", 5" & 6" LINE VOLTAGE

CATALOG NO. / DESCRIPTION

NFBIC-4INCATA 4" Line Voltage Fire Rated Housing, medium base socket
NFBIC-5INCATA 5" Line Voltage Fire Rated Housing, medium base socket
NFBIC-6INCATA 6" Line Voltage Fire Rated Housing, medium base socket

Compatible with many Nora trims in a variety of finishes and styles. Refer to spec sheet.



4" SHALLOW FIRE RATED HOUSING

Only 4-13/16" tall


Nora adds this shallow 2 hour fire-rated housing to fit in a shallow plenum. The shallow design still allows for a deep 4" recessed fixture producing up to 1200 lumens! Specification grade fire-rated new construction housing. The double wall fixture incorporates a non-combustible fiber insulation to prevent passage of flames, toxic gases, ignitable gasses into ceiling plenums. The cULus listed housing is rated for a minimum of two hours protection. Suitable for commercial, multi-family and residential applications.

FEATURES

- Only 4-13/16" tall and 4.3 lbs
- Rated for direct contact with insulation
- cULus classified Two Hour Fire Rating
- 24-1/2" Bar hangers with captive nails & alignment feet
- cULus Classified for Two Hour Fire Rating
- cULus Listed for Wet Locations when used with compatible reflectors
- Meets or exceeds ASTM E283 Air-Tight requirements
- Compatible with Nora Lighting's Onyx and Pearl LED retrofit luminaires (not compatible with NOX-434)



ONLY 4-13/16" TALL

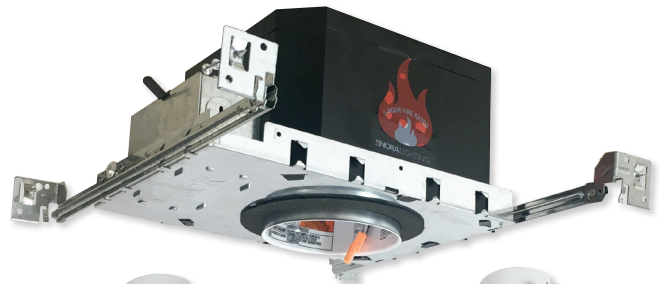

NOXTW-432



NOX-436



NOXTW-431



NPR-4SC



NPR-4RG

FIRE RATED HOUSING 4" SHALLOW LED DEDICATED

CATALOG NO. / DESCRIPTION

NFBIC-427LMRATA 4" Shallow Recessed LED Dedicated Fire Rated Housing

