

# NOXTW-4 Series

## 4" Onyx Tunable White LED Retrofit

Source: 10.5W

Up to 850lm

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

4" Onyx Tunable White Retrofit Series include an integral tunable CCT switch. Spun aluminum construction provides clean sharp edges and is suitable for use with most 4" recessed housings. Deep regressed optics and round aperture deliver even and glare-free illumination.

### FEATURES

- Up to 850lm / 10.5W LED light engine
- 2700K, 3000K, 3500K, 4000K or 5000K @ 90+ CRI
- Integral dimmable driver
- Includes medium base socket adapter for easy retrofitting in 4" recessed housings
- Quick connector is compatible with dedicated LED housings
- 5-year limited warranty
- cULus classified for wet locations

### SPECIFICATION

**Reflector:** One piece, spun aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

**Mounting:** Two steel, spring mounting blades allow for easy and secure mounting in most 4" housings.

**Retrofit:** Luminaires include a medium base screw-socket adapter (NRA-21ISM) for retrofitting into medium base downlight housings. Intended to be used as a LED lamp replacement. GU24 socket adapter (NRA-212SM) is available.

### ELECTRICAL

**Input Voltage:** 120V 60Hz

**Lumens / Wattage:** Up to 850lm / 10.5W

**Color Temperature:**

2700K, 3000K, 3500K, 4000K or 5000K

(each luminaire includes a CCT switch)

**Color Rendering Index:** 90+CRI

**Dimming:** Triac or ELV

[Click Here](#) or check complete dimmer list at

www.NoraLighting.com in the "Compatibility" page under "Resources" tab

### COMPATIBLE HOUSINGS

Onyx reflectors are compatible with most 4" IC and Non-IC housings by Nora and others.

#### Fire Box

- [NFBIC-4LMRATA\\*](#) IC Air-Tight Dedicated LED Firebox
- [NFBIC-427LMRATA\\*](#) Shallow ICAT Dedicated LED Firebox
- [NFBIC-4INCATA](#) IC Air-Tight Line Voltage Firebox

#### New Construction

- [NHIC-4LMRAT\\*](#) IC Air-Tight Dedicated LED
- [NHIC-4LMRAT/277\\*](#) ICAT Dedicated LED, 277V (includes step-down transformer)
- [NHICCP-4LMRAT\\*](#) Chicago Plenum Dedicated LED
- [NHIC-427LMRAT\\*](#) Shallow IC Air-Tight Dedicated LED
- [NSIC-401QAT](#) IC Air-Tight Line Voltage
- [NS-401QAT](#) Air-Tight Line Voltage
- [NHIC-4G24AT](#) IC Air-Tight GU24

#### Remodel

- [NHRIC-4LMRAT\\*](#) IC Air-Tight Dedicated LED
- [NHRIC-427LMRAT\\*](#) Shallow IC Air-Tight Dedicated LED
- [NSR-404QAT](#) Air-Tight Line Voltage
- [NSRIC-404QAT](#) IC Air-Tight Line Voltage

\* Nora LED Dedicated housings are cULus listed for use only with Nora LED Retrofits.

### ACCESSORIES

- [NOX-4REFL:](#) Round reflector insert used to convert the reflector finish for NOXAC-431. Available in black, haze or diffused clear.
- [NOX-4BAF:](#) Round baffle insert used to convert the reflector for NOXAC-431. Available in black or white.
- [NOX-4EYELIDW:](#) White round eyelid used to convert round reflector or baffle to half moon wall wash trim.
- [NOX-4OR-W:](#) White round oversize ring used to cover ceiling cut-outs up to 5-7/8".

### LABELS AND LISTINGS



- cETLus classified for Wet Locations
- ENERGY STAR certified (WW only)
- [5-Year Limited Warranty](#)
- Meets ASTM-E283 Air-Tight requirements
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Performance Data		
Part Number	Lumens	CCT
<b>NOXTW-431WW</b>	738lm	2700K
<b>NOXTW-431WW</b>	825lm	3000K
<b>NOXTW-431WW</b>	847lm	3500K
<b>NOXTW-431WW</b>	892lm	4000K
<b>NOXTW-431WW</b>	869lm	5000K

*Delivered lumens will vary depending on trim type and finish*

### PRODUCT IMAGES AND DIMENSIONS

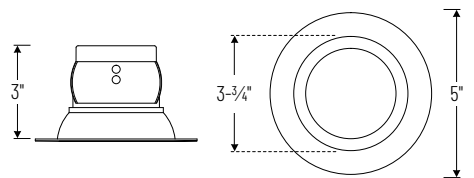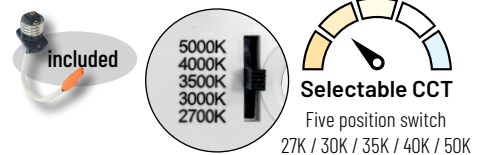

## 4" Onyx Tunable White LED Retrofit

Trim Type	Color Temperature	Finish
<b>NOXTW-431WW</b> = Round Reflector	Selectable CCT	<b>WW</b> = White / White Flange
<b>NOXTW-432WW</b> = Round Baffle	(2700K / 3000K / 3500K / 4000K / 5000K)	

## Optional Accessories

Description
<b>NOX-4REFLB</b> = 4" Black Reflector Insert for NOXTW-431
<b>NOX-4REFLD</b> = 4" Clear Diffused Reflector Insert for NOXTW-431
<b>NOX-4REFLHZ</b> = 4" Haze Reflector Insert for NOXTW-431
<b>NOX-4BAFB</b> = 4" Black Baffle Insert for NOXTW-431
<b>NOX-4BAFW</b> = 4" White Baffle Insert for NOXTW-431
<b>NOX-4EYELIDW</b> = 4" Round White Eyelid
<b>NOX-4OR-W</b> = 4" Round White Oversize Ring
<b>NRA-21ISM</b> = Medium base screw-in socket (included w/ each)
<b>NRA-212SM</b> = Socket adapter for use with GU24 housings

Example: **NOXTW-431WW** = 4" Onyx Tunable White Round Reflector LED Retrofit, White Reflector / White Flange

# NOXTW-4 Series

4" Onyx Tunable White Retrofit Reflector Accessories

Type	_____
Project	_____
Catalog No.	_____
Notes	_____



Onyx Reflector Insert

**NOX-4REFLB**  
**NOX-4REFLD**  
**NOX-4REFLHZ**

Black  
Clear Diffused  
Haze

Round reflector insert is field changeable used to convert the reflector finish for NOXTW-431.



Onyx Baffle Insert

**NOX-4BAFB**  
**NOX-4BAFW**

Black  
White

Round baffle insert is field changeable used to convert reflector (NOXTW-431) to baffle.



Onyx Eyelid

**NOX-4EYELIDW**

White

Round eyelid clips on reflector or baffle to convert into half moon wall wash



Onyx Oversize Ring

**NOX-4OR-W**

White

Round oversize ring covers large ceiling cut-outs up to 5-7/8"



Medium Base Screw-In Socket

**NRA-21ISM**

Medium base screw-in socket adapter for retrofitting into existing medium base housings. One is included with each luminaire.



Socket Adapter for GU24 Housings

**NRA-212SM**

GU24 socket adapter for retrofitting into existing GU24 housings.

# PHOTOMETRICS

## 4" Onyx Tunable White Retrofit Reflectors

Type


Project

Catalog No.

Notes

### Test Information

Test Number: NTR1168  
 Part Number: NOXTW-431WW  
 Beam Spread: 93° Wide Flood  
 Lumens: 738lm  
 Wattage: 10.97W  
 Efficacy: 67lpw  
 CCT / CRI: 2700K / 90 CRI  
 Spacing Criteria (0°-180): 1.18  
 Spacing Criteria (90°-270): 1.18



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	20.9fc	8'-5"
6'	9.3fc	12'-7"
8'	5.2fc	16'-10"
10'	3.3fc	21'
12'	2.3fc	25'-2"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	250	33.9
0-40	397	53.8
0-60	638	86.5
0-90	734	99.5
90-180	4	0.5
0-180	738	100

### Candela Table

Vertical Angles	Candela
0	334
5	331
15	315
25	282
35	235
45	176

### Test Information

Test Number: NTR1169  
 Part Number: NOXTW-431WW  
 Beam Spread: 93° Wide Flood  
 Lumens: 825lm  
 Wattage: 10.78W  
 Efficacy: 77lpw  
 CCT / CRI: 3000K / 90 CRI  
 Spacing Criteria (0°-180): 1.18  
 Spacing Criteria (90°-270): 1.2



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	20.9fc	8'-6"
6'	9.3fc	12'-8"
8'	5.2fc	17'
10'	3.3fc	21'-2"
12'	2.3fc	25'-6"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	280	33.9
0-40	444	53.8
0-60	715	86.6
0-90	821	99.5
90-180	4	0.5
0-180	825	100

### Candela Table

Vertical Angles	Candela
0	371
5	367
15	351
25	315
35	263
45	198

### Test Information

Test Number: NTR1170  
 Part Number: NOXTW-431WW  
 Beam Spread: 92° Wide Flood  
 Lumens: 847lm  
 Wattage: 10.81W  
 Efficacy: 78lpw  
 CCT / CRI: 3500K / 90 CRI  
 Spacing Criteria (0°-180): 1.16  
 Spacing Criteria (90°-270): 1.16



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	24.3fc	8'-4"
6'	10.8fc	12'-5"
8'	6.1fc	16'-6"
10'	3.9fc	20'-8"
12'	2.7fc	24'-11"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	289	34.1
0-40	456	53.8
0-60	731	86.3
0-90	843	99.5
90-180	4	0.5
0-180	847	100

### Candela Table

Vertical Angles	Candela
0	388
5	386
15	367
25	326
35	269
45	201

### Test Information

Test Number: NTR1171  
 Part Number: NOXTW-431WW  
 Beam Spread: 94° Wide Flood  
 Lumens: 892lm  
 Wattage: 10.8W  
 Efficacy: 83lpw  
 CCT / CRI: 4000K / 90 CRI  
 Spacing Criteria (0°-180): 1.2  
 Spacing Criteria (90°-270): 1.2



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	24.9fc	8'-7"
6'	11.1fc	13'
8'	6.2fc	17'-4"
10'	4fc	21'-7"
12'	2.8fc	25'-11"

### Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	301	33.8
0-40	479	53.7
0-60	772	86.6
0-90	887	99.5
90-180	4	0.5
0-180	892	100

### Candela Table

Vertical Angles	Candela
0	398
5	396
15	378
25	241
35	285
45	215

### Test Information

Test Number: NTR1172  
 Part Number: NOXTW-431WW  
 Beam Spread: 94° Wide Flood  
 Lumens: 869lm  
 Wattage: 10.96W  
 Efficacy: 79lpw  
 CCT / CRI: 5000K / 90 CRI  
 Spacing Criteria (0°-180): 1.18  
 Spacing Criteria (90°-270): 1.18



### Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
4'	24.2fc	8'-7"
6'	10.8fc	12'-11"
8'	6.1fc	17'-2"
10'	3.9fc	21'-6"
12'	2.7fc	25'-10"

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	293	33.7
0-40	465	53.5
0-60	749	86.2
0-90	865	99.5
90-180	4	0.5
0-180	869	100

### Candela Table

Vertical Angles	Candela
0	387
5	386
15	369
25	331
35	276
45	208