

LED BACKLIT PANELS

Selectable Lumens (Up to 5700lm)
Selectable CCT (30K/35K/40K)

Backlit LED Panels deliver more lumens and uniformity to illuminate spaces without glare. Panels can be utilized in offices, conference rooms, libraries and other task areas where general illumination is desired. The fixtures accept universal 120-347V input with a range of wattages, lumens and field selectable color temperatures (dedicated 5000K available). Luminaire sizes are available: 2' x 2', 1' x 4' and 2' x 4', which can be installed in most grid ceilings. Optional mounting accessories include surface mount, recessed mount or pendant mount.

FEATURES

- Three Panel Sizes (1' x 4' / 2' x 2' / 2' x 4')
- Selectable Lumen switch changes outputs from:
 - 1'x4' = 3650 to 2600 lumens / 30W to 20W
 - 2'x2' = 3750 to 2650 lumens / 30W to 20W
 - 2'x4' = 5700 to 4600 lumens / 45W to 36W
- Field Selectable CCT (3000K / 3500K / 4000K)
- 120-347V input and 0-10V dimming
- Smooth opalescent acrylic lens
- Non-yellowing PMMA light guide
- Mounting kits available for pendant, surface or recessed hard ceilings
- 60,000 Hour lifetime at L70
- DLC Listed
- 5-Year Limited Warranty
- cULus Listed




LED BACKLIT PANELS SELECTABLE LUMENS & CCT

| SIZE / LUMENS | CCT | FINISH | OPTIONAL |
|--|---|----------------|---------------------|
| NPDBLSW-E22 2' x 2' / 3750lm | /334 Selectable CCT 3000K / 3500K / 4000K | W White | EM Emergency |
| NPDBLSW-E14 1' x 4' / 3650lm | | | |
| NPDBLSW-E24 2' x 4' / 5700lm | | | |

Example: **NPDBLSW-E22/334W** - 2' x 2' LED Panel, Selectable Lumens & CCT, White finish

OPTIONAL ACCESSORIES

| DESCRIPTION | ACCESSORY TYPE |
|-----------------------------------|--|
| NPDBL-14 for 1' x 4' panel | DFK/W Surface Mount Frame |
| NPDBL-22 for 2' x 2' panel | DDFK/W Surface Mount for Emergency |
| NPDBL-24 for 2' x 4' panel | RFK/W Recessed Mounting Kit |
| NPDBL-JB4X4 | 4" Junction Box for Daisy Chaining |
| NPDBL-PKW | Pendant Mounting Kit |

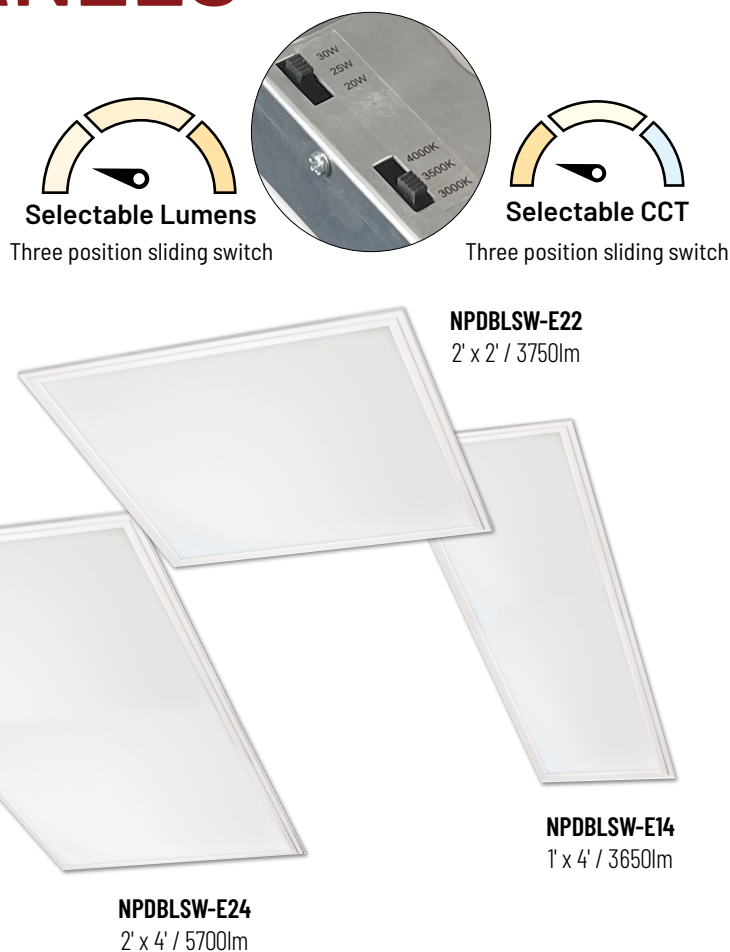

LED BACKLIT PANELS

Three Sizes up to 5700 lumens!

Backlit LED Panels deliver more lumens and uniformity to illuminate spaces without glare. Panels can be utilized in offices, conference rooms, libraries and other task areas where general illumination is desired. The fixtures accept universal 120-347V input with a range of wattages, lumens and field selectable color temperatures (dedicated 5000K available). Luminaire sizes are available: 2' x 2', 1' x 4' and 2' x 4', which can be installed in most grid ceilings. Optional mounting accessories include surface mount, recessed mount or pendant mount.


FEATURES

- Panel Sizes and Lumens:
 - 1' x 4' - 3500lm / 30W
 - 2' x 2' - 3500lm / 30W
 - 2' x 4' - 5600lm / 45W
- Field Selectable CCT (3000K/3500K/4000K) or Dedicated 5000K
- 120-347V input and 0-10V dimming
- Smooth opalescent acrylic lens
- Non-yellowing PMMA light guide
- Mounting kits available for pendant, surface or recessed hard ceilings
- 60,000 Hour lifetime at L70
- DLC Listed
- 5-Year Limited Warranty
- cULus Listed




Selectable CCT

Three position sliding switch
3000K / 3500K / 4000K



NPDBL-E22
2' x 2' / 3500lm

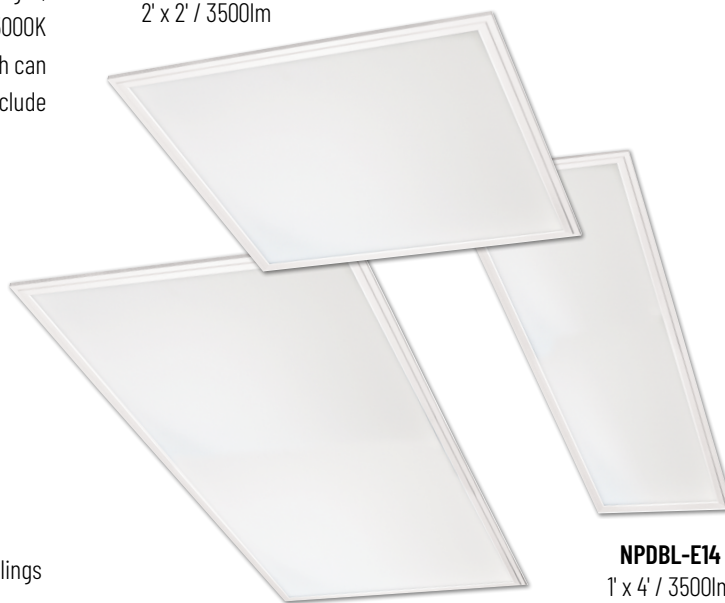

NPDBL-E14
1' x 4' / 3500lm

NPDBL-E24
2' x 4' / 5600lm



LED BACKLIT PANELS

| SIZE / LUMENS | CCT | FINISH | OPTIONAL |
|-----------------------------------|---|----------------|-------------------------|
| NPDBL-E22 2' x 2' / 3500lm | /334 Selectable CCT 3000K / 3500K / 4000K | W White | EM Emergency |
| NPDBL-E14 1' x 4' / 3500lm | | | MS Motion Sensor |
| NPDBL-E24 2' x 4' / 5600lm | | | |
| NPDBL-E22 2' x 2' / 3500lm | /50 Dedicated 5000K | W White | EM Emergency |
| NPDBL-E24 2' x 4' / 5700lm | | | |

Example: **NPDBL-E22/334W** - 2' x 2' Panel, 3500lm / 30W, Selectable CCT, White finish

OPTIONAL ACCESSORIES

| DESCRIPTION | ACCESSORY TYPE |
|---|--|
| NPDBL-14 for 1' x 4' | DFK/W Surface Mount Frame |
| NPDBL-22 for 2' x 2' | DDFK/W Surface Mount for Emergency |
| NPDBL-24 for 2' x 4' | RFK/W Recessed Mounting Kit |
| NPDBL-JB4X4 4" Junction Box for Daisy Chaining | |
| NPDBL-PKW Pendant Mounting Kit | |

