

NI0B-2RND
 2" Iolite Round Reflector with 10° Optic
 Source: 12W
 800lm

PRODUCT DESCRIPTION

2" Iolite trims can be specified for use with Iolite new construction or remodel housings. Deep regressed cone reflectors optimize visual cut-off.

FEATURES

- Delivering up to 8263 center beam candlepower (CBCP)
- 2700K, 3000K, 3500K, 4000K @ 90+ CRI
- 10° TIR optic delivers luminous intensity of higher lumen downlights
- 5-Year limited warranty

SPECIFICATION

Construction: Trims are constructed of heat dissipating, die-cast aluminum. The aluminum die-cast LED heat sink is threaded to fit the trim and transfer heat.

Mounting: Luminaire includes friction blades to mount securely to housing.

OPTIC

Each luminaire includes 10° TIR optic (Note: cannot be changed in the field)
 Luminaire is also available with field changeable optics, [Click Here](#) for more information.

ELECTRICAL

Lumens / Wattage: 800lm / 12W
Color Temperature: 2700K, 3000K, 3500K, 4000K
Color Rendering Index: 90+ CRI
Operating Temperature: Specified by housing
Lifetime: 50,000 hours @ L70
Dimming: Specified by housing

COMPATIBLE HOUSINGS

Luminaires are compatible with respective Iolite housings manufactured by Nora Lighting.

CATALOG NO.	DESCRIPTION
NH0ICD-28LE4	ICAT New Construction, 120-277V; Triac / ELV / 0-10V
NH0ICD-28LUPEQ	ICAT New Construction, 120/277V; Lutron EcoSystem
NH0ICDCP-28LE4	Chicago Plenum, 120-277V; Triac / ELV / 0-10V
NH0ICDCP-28LUPEQ	Chicago Plenum, 120/277V; Lutron EcoSystem
NHR0IC-28LE4	ICAT Remodel, 120-277V; Triac / ELV / 0-10V

Accessories: Luminaires can accommodate (1) hex louver and (1) translucent deco collar or opaque snoot, no accessory holder is required, see accessories page. Flush mount mud ring is available to give the appearance of a trimless, compatible with new construction housings only.

LABELS AND LISTINGS

- cULus Listed for Wet Locations
- [5-Year Limited Warranty](#)
- RoHS Compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2022




Type
Project
Catalog No.
Notes

Performance Data			
Part Number	Lumens	CCT	CBCP
NI0B-2RND40QWW	838lm	4000K	8263 cd

Delivered lumens will vary depending on CCT and finish

PRODUCT IMAGES AND DIMENSIONS



NI0B-2RND
 Round Reflector
 Non-Adjustable



BB
 Black Reflector
 Black Flange



BW
 Black Reflector
 White Flange



BZ
 Bronze Reflector
 Bronze Flange



CHMPW
 Champagne Haze Reflector
 Matte Powder White Flange



CMPW
 Specular Clear Reflector
 Matte Powder White Flange



HW
 Haze Reflector
 White Flange



HZMPW
 Haze Reflector
 Matte Powder White Flange



MPW
 Matte Powder White Reflector
 Matte Powder White Flange



NN
 Natural Metal Reflector
 Natural Metal Flange



WW
 White Reflector
 White Flange

2" Iolite Round Reflector with 10° Optic - Dedicated Housing Required

Color Temperature	Finish
NI0B-2RND270 = 2700K	BB = Black / Black
NI0B-2RND300 = 3000K	BW = Black / White
NI0B-2RND350 = 3500K	BZ = Bronze / Bronze
NI0B-2RND400 = 4000K	CHMPW = Champagne / Matte Powder White
	CMPW = Specular Clear / Matte Powder White
	HW = Haze / White
	HZMPW = Haze / Matte Powder White
	MPW = Matte Powder White
	NN = Natural Metal / Natural Metal
	WW = White / White

Compatible Housings

Housing Type
NH0ICD-28LE4 = ICAT New Construction; Triac / ELV / 0-10V
NH0ICD-28LUPEQ = ICAT New Construction; Lutron EcoSystem
NH0ICDCP-28LE4 = Chicago Plenum; Triac / ELV / 0-10V
NH0ICDCP-28LUPEQ = Chicago Plenum; Lutron EcoSystem
NHR0IC-28LE4 = ICAT Remodel; Triac / ELV / 0-10V

Example: **NI0B-2RND40QWW** = 2" Iolite Round Reflector with 10° Optic, 4000K, White finish


2" Iolite Accessories

2" Iolite Round Reflector with 10° Optic

Type
Project
Catalog No.
Notes

ACCESSORIES

Iolite accessories can be added at any point in the design process. Accessories easily install between LED module and die-cast trim. Luminaire will accommodate (1) hex louver and (1) collar accessory, no accessory holder required.

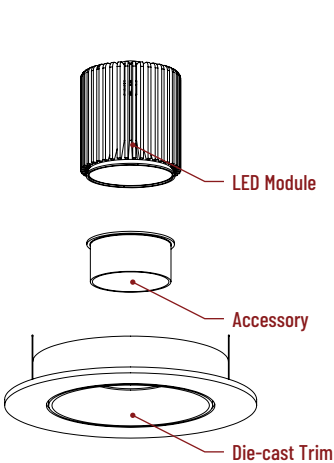

Translucent Decorative Collar

NIO-AS14(color) 5/8" length
NIO-AS19(color) 3/4" length
NIO-AS26(color) 1" length
Color:
AM (amber), BLU (blue), FR (frosted), R (red)

Translucent collars color the aperture with the specified color while producing white general light. Collars are available in different lengths. Use to add interest, create a theme, match a theme or define a space.



Opaque Collar Snoot

NIO-AS14(color) 5/8" length
NIO-AS19(color) 3/4" length
NIO-AS26(color) 1" length
Color:
MPW (matte powder white), WH (white)

Opaque snoot greatly reduces aperture brightness while preserving light output.



Hex Cell Louver

NIO-HC Black
Hex cell louver subtly reduces aperture brightness by reducing light output by about 20%.

FLUSH MOUNT

2" Iolite trims can be installed flush with the drywall for a flush mount appearance. A flush mount mud ring is installed after the drywall and a professional drywall finisher floats the ceiling to blend in the mud ring.



Flush Mount Mud Ring

NIO-FMMR-2R Round Mud Ring

Mounts trim flush to ceiling with flange visible.
Mud ring attaches to drywall. Only for use with NH10ICD-28 or NH10ICDCP-28 new construction housings and NIOB-2R trims.
Dimensions: 7-7/8" diameter 1/2" thick

PHOTOMETRICS

2" Iolite Round Reflector with 10° Optic


Type

Project

Catalog No.

Notes

Test Information
Test Number: NTR1906R1
Part Number: NI0B-2RND0C400WW
Beam Spread: 12° Spot
Lumens: 838lm
Wattage: 12.4W
Efficacy: 68lpw
CCT / CRI: 4000K / 90 CRI
Spacing Criteria (0°-180°): 0.22
Spacing Criteria (90°-270°): 0.22



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
8'	129fc	1'-10"
10'	82.6fc	2'-2"
12'	57.4fc	2'-7"
14'	46.7fc	2'-11"
16'	32.3fc	3'-6"

Zonal Lumen Summary			Candela Table	
Zone	Lumens	% Luminaire	Vertical Angles	Candela
0-30	723	86.3	0	8263
0-40	784	93.5	5	5435
0-60	819	97.7	15	723
0-90	838	100	25	327
90-180	0	0	35	83
0-180	838	100	45	24

Lumen Output Multipliers
Color Temperature: 2700K (0.9), 3000K (0.96), 3500K (0.96), 4000K (1.00)