

# NOXAC-5632TW

## 5"/6" AC Onyx LED Retrofit Baffle with Selectable CCT

Source: 1150lm  
16.5W

### PRODUCT DESCRIPTION

5"/6" AC Onyx Retrofit Series requires no driver and allow for a sleek design. Spun aluminum construction provides clean sharp edges and is suitable for use with most 5" and 6" recessed housings. Deep regressed optics and round aperture deliver even and glare-free illumination.

### FEATURES

- Delivering over 1150 lumens
- Five color temperatures in each fixture (2700K / 3000K / 3500K / 4000K / 5000K)
- Dimmable AC LED
- Includes medium base socket adaptor for easy retrofitting in 5" or 6" recessed housings
- 5-year limited warranty
- Classified for wet locations

### SPECIFICATION

**Reflector:** One piece, spun aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

**Mounting:** Two steel, torsion mounting springs allow for easy and secure mounting in most 5" and 6" housings.

**Retrofit:** Luminaires include a medium base screw-socket adapter ([NRA-211SM](#)) for retrofitting into medium base downlight housings. Intended to be used as a LED lamp replacement. GU24 socket adapter ([NRA-212SM](#)) is available.

### ELECTRICAL

**Voltage:** 120VAC

**Lumens / Wattage:** 1150lm / 16.5W

**Color Temperature:** Selectable CCT: 2700K / 3000K / 3500K / 4000K / 5000K (*Note: Preset to 3000K*)

**Color Rendering Index:** 90+ CRI

**Operating Temperature:** 0°C to 25°C ambient temperature

**Dimming:** Triac/ELV

[Click Here](#) or check complete dimmer list at [www.NoraLighting.com](#) in the "Compatibility" page under "Resources" tab

### COMPATIBLE HOUSINGS

Onyx retrofits are compatible with most 5" & 6" IC and Non-IC housings by Nora and others.

#### Fire Box

- [NFBIC-5INCATA](#) 5" ICAT Fire Box
- [NFBIC-5LMRATA\\*](#) 5" ICAT Dedicated LED Fire Box
- [NFBIC-6INCATA](#) 6" ICAT Fire Box
- [NFBIC-6LMRATA\\*](#) 6" ICAT Dedicated LED Fire Box

#### New Construction

- [NHIC-5LMRAT\\*](#) 5" ICAT Dedicated LED
- [NHIC-5LMRAT/277\\*<sup>1</sup>](#) 5" ICAT Dedicated LED, 277V
- [NHIC-527LMRAT\\*](#) 5" ICAT Shallow Dedicated LED
- [NHIC-5010AT](#) 5" ICAT Line Voltage
- [NHIC-5270AT](#) 5" ICAT Shallow Line Voltage
- [NHIC-6LMRAT\\*](#) 6" ICAT Dedicated LED
- [NHIC-6LMRAT/277\\*<sup>1</sup>](#) 6" ICAT Dedicated LED, 277V
- [NHICCP-6LMRAT\\*](#) 6" Chicago Plenum Dedicated LED
- [NHIC-27LMRAT\\*](#) 6" ICAT Shallow Dedicated LED
- [NHIC-170AT](#) 6" ICAT Line Voltage
- [NHIC-170NBAT](#) 6" ICAT Line Voltage (No Bracket)
- [NHIC-270AT](#) 6" ICAT Shallow Line Voltage
- [NH-26Q](#) 6" Line Voltage
- [NHIC-6G24ATFL](#) 6" ICAT GU24

#### Remodel

- [NHRIC-5LMRAT\\*](#) 5" ICAT Dedicated LED
- [NHRIC-527LMRAT\\*](#) 5" ICAT Shallow Dedicated LED
- [NHRIC-5040AT](#) 5" ICAT Line Voltage
- [NHRIC-5270AT](#) 5" ICAT Shallow Line Voltage
- [NHRIC-6LMRAT\\*](#) 6" ICAT Dedicated LED
- [NHRIC-27LMRAT\\*](#) 6" ICAT Shallow Dedicated LED
- [NHRIC-170AT](#) 6" ICAT Line Voltage
- [NHRIC-170NBAT](#) 6" ICAT Line Voltage (No Bracket)
- [NHRIC-270AT](#) 6" ICAT Shallow Line Voltage
- [NHR-26Q](#) 6" Line Voltage

\* Nora LED Dedicated housings are listed for use only with Nora LED Retrofits.

<sup>1</sup> Housings include a step down transformer

### LABELS AND LISTINGS

- cETLus classified for Wet Locations
- [5-Year Limited Warranty](#)
- Meets ASTM-E283 Air-Tight requirements
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Type

Project


Catalog No.

Notes

### Performance Data

Part Number	Lumens	CCT
NOXAC-5632TWWW	1037lm	2700K
NOXAC-5632TWWW	1089lm	3000K
NOXAC-5632TWWW	1175lm	3500K
NOXAC-5632TWWW	1169lm	4000K
NOXAC-5632TWWW	1113lm	5000K

### PRODUCT IMAGES AND DIMENSIONS

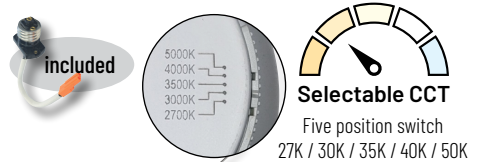


NOXAC-5632TWWW  
White Finish



NOXAC-5632TWWW / NOX-56EYELIDW  
White Eyelid



NOXAC-5632TWWW / NOX-50R-W  
White Oversize Ring

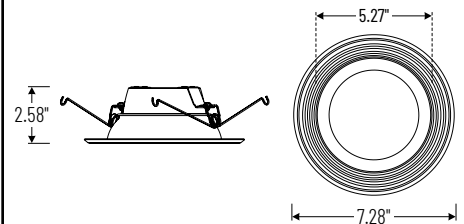

## 5"/6" AC Onyx LED Retrofit Baffle with Selectable CCT

Finish

NOXAC-5632TWWW = White Finish

## Optional Accessories

Description

- NOX-56EYELIDW = 5"/6" Round White Eyelid
- NOX-56OR-W = 5"/6" Round White Oversize Ring
- NRA-211SM = Medium base screw-in socket (included w/ each)
- NRA-212SM = Socket adapter for use with GU24 housings

Example: NOXAC-5632TWWW = 5"/6" AC Onyx LED Round Retrofit Baffle with Selectable CCT, White Baffle / White Flange