

# NRM3-64 / NRM3-67 / NRM3-69

## 6" Marquise III Adjustable Trims

Source: 11W to 26W

900lm to 2500lm

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

Marquise III downlights includes Signify® Fortimo COB LED technology for better optic control with three specified beam spreads. Beam spreads focus the light down to the work plane from high ceiling applications.

### FEATURES

- Trims adjust up to 22°
- Signify® Fortimo COB LED technology
- Spot, Narrow or Flood beam spreads
- 2700K, 3000K, 3500K and 4000K @ 90+ CRI

### CONSTRUCTION

**Trim:** Aluminum gimbal can be adjusted up to 22° vertically and 359° horizontally. Regressed trims are available with high grade reflector or baffle with deep grooves to reduce aperture glare. Trims include torsion springs to mount securely to housings.


| ELECTRICAL                   | L1                                      | L2                                       | L3                                   | L4                                   |
|------------------------------|---|--|--------------------------------------|--------------------------------------|
| <b>Delivered Lumens</b>      | 900lm                                   | 1500lm                                   | 2000lm                               | 2500lm                               |
| <b>Wattage</b>               | 11W max.                                | 16W max.                                 | 22W max.                             | 26W max.                             |
| <b>Color Temperature</b>     | 2700K, 3000K, 3500K or 4000K            |  |                                      |                                      |
| <b>Color Rendering Index</b> | 90+ CRI                                 |  |                                      |                                      |
| <b>Beam Spread</b>           | Spot, Narrow Flood or Flood             |  |                                      |                                      |
| <b>Compatible Housings</b>   | NHMIC3-6L1<br>NHMICD3-6L<br>NHRMIC3-6L1 | NHMIC3-6L2<br>NHMICD3-6L2<br>NHRMIC3-6L2 | NHM3-6L3<br>NHMICD3-6L3<br>NHRM3-6L3 | NHM3-6L4<br>NHMICD3-6L4<br>NHRM3-6L4 |
| <b>Lifetime</b>              | 50,000 hours @ L70                      |  |                                      |                                      |

### LABELS AND LISTINGS



- cULus Listed for Damp Location when used with compatible housing
- [5-Year Limited Warranty](#)
- Certified to the high efficacy requirements of California Title 24 JA8-2022
- ASTM E283 for Air-Tight
- FCC compliant




### PRODUCT IMAGES AND DIMENSIONS

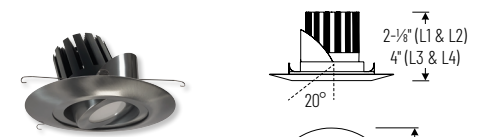


**NRM3-64**  
Surface Adjustable

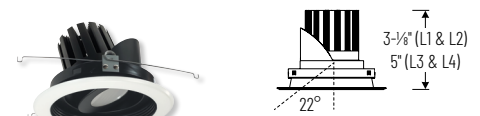

**NRM3-67**  
Adjustable  
Regressed Baffle

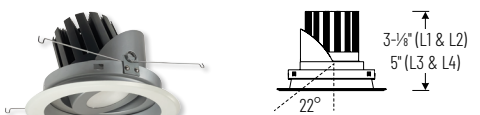

**NRM3-69**  
Adjustable  
Regressed Reflector

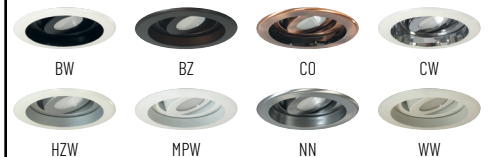

### 6" Marquise III Adjustable Trims - Dedicated Marquise III Housing Required

| Trim Type                                     | Lumens / Wattage         | CCT               | Beam Spread             | Finish (see chart below)                         |
|---|--------------------------|-------------------|-------------------------|--|
| <b>NRM3-64</b> = Surface Adjustable           | <b>L1</b> = 900lm / 11W  | <b>27</b> = 2700K | <b>S</b> = Spot         | <b>BW</b> = Black / White Flange                 |
| <b>NRM3-67</b> = Regress Baffle Adjustable    | <b>L2</b> = 1500lm / 16W | <b>30</b> = 3000K | <b>N</b> = Narrow Flood | <b>BZ</b> = Bronze / Bronze Flange               |
| <b>NRM3-69</b> = Regress Reflector Adjustable | <b>L3</b> = 2000lm / 22W | <b>35</b> = 3500K | <b>F</b> = Flood        | <b>C</b> = Chrome                                |
|   | <b>L4</b> = 2500lm / 26W | <b>40</b> = 4000K |                         | <b>CW</b> = Specular Clear / White Flange        |
|   |                          |                   |                         | <b>CO</b> = Copper / Copper Flange               |
|   |                          |                   |                         | <b>HZW</b> = Haze / White Flange                 |
|   |                          |                   |                         | <b>MPW</b> = Matte Powder White                  |
|   |                          |                   |                         | <b>NN</b> = Natural Metal / Natural Metal Flange |
|   |                          |                   |                         | <b>WW</b> = White / White Flange                 |

| Available Finishes | BW | BZ | C | CO | CW | HZW | MPW | NN | WW |
|--------------------|----|----|---|----|----|-----|-----|----|----|
| <b>64</b>          |    |    | • |    |    |     | •   | •  | •  |
| <b>67</b>          | •  | •  |   |    |    |     | •   | •  | •  |
| <b>69</b>          | •  | •  |   | •  | •  | •   | •   | •  | •  |

Example: **NRM3-64L430SBZ** = 6" Marquise III Surface Adjustable, 2500lm / 26W, 3000K, Spot Beam Spread, Bronze Finish