

# NRMC3-51 / NRMC3-52

5" Marquise III Retrofit Downlights

Source: 12W  
1000lm

Type
Project
Catalog No.
Notes

## PRODUCT DESCRIPTION

The Marquise III Retrofit Series replaces existing recessed trims and light sources. Series includes Signify® COB LED with optimized beam spreads, dimmable driver and medium base socket to replace old light sources with the latest LED technology.

## FEATURES

- Retrofit existing architectural or commercial housings with the latest LED technology
- Over 80% energy savings when compared to incandescent
- Signify® Fortimo COB LED technology
- Spot, narrow or flood beam spreads
- 1000lm LED package
- Dedicated CCT (27K, 30K, 35K & 40K) @ 90+CRI
- 5-year Limited Warranty

## CONSTRUCTION

**Reflector:** Aluminum spun reflector with deep set diffused lens for excellent visual comfort while providing high lumen output.

**Mounting:** Trim includes friction blades to mount trim securely to housing.

## ELECTRICAL

**Lumens / Wattage:** 1000lm / 12W

**Color Temperature:** 2700K, 3000K, 3500K, 4000K

**Color Rendering Index:** 90+CRI

**Beam Spread:** Spot, Narrow Flood, Flood

**Operating Temperature:** 0°C to 45°C

**Lifetime:** 50,000 hours @ L70

**Dimming:** Dimmable down to 10% with Triac or ELV

[Click Here](#) or check complete dimmer list at [www.NoraLighting.com](http://www.NoraLighting.com) in the "Compatibility" page under "Resources" tab

## COMPATIBLE HOUSINGS

Marquise retrofit downlights are compatible with most 5s" IC and Non-IC housings by Nora Lighting and others.

### FIRE BOX

[NFBIC-5MRCATA](#)

5" ICAT Fire Box

[NFBIC-5LMRATA\\*](#)

5" ICAT Dedicated LED Fire Box

### NEW CONSTRUCTION

[NHIC-5LMRAT\\*](#)

5" ICAT Dedicated LED

[NHIC-5010AT](#)

5" IC Air-Tight Line Voltage

### REMODEL

[NHRIC-5LMRAT](#)

5" IC Air-Tight Dedicated LED

[NHRIC-5040AT](#)

5" IC Air-Tight Line Voltage


**Retrofit:** Marquise retrofit series includes medium base screw-socket adapter (NRA-211SM) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify NRA-212SM.

## LABELS AND LISTINGS


- cULus classified for Wet Location when used with compatible housing
- [5-Year Limited Warranty](#)
- Certified to the high efficacy requirements of California Title 24 JA8-2022
- ASTM E283 for Air-Tight
- FCC compliant




## PRODUCT IMAGES AND DIMENSIONS

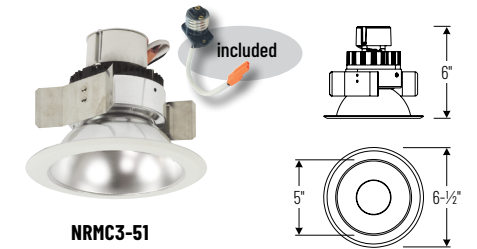

**NRMC3-51**  
Reflector

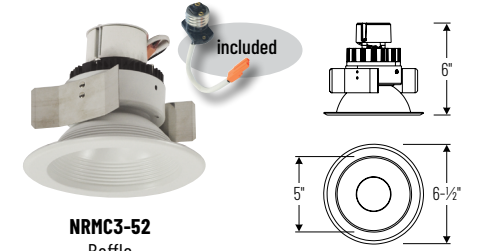

**NRMC3-52**  
Baffle

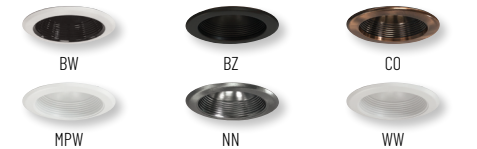

## 5" Marquise III Retrofit Downlight

Trim Type	Lumens / Wattage	CCT	Beam Spread	Finish (see chart below)
<b>NRMC3-51</b> = Reflector	<b>L1</b> = 1000lm / 12W	<b>27</b> = 2700K	<b>S</b> = Spot	<b>BB</b> = Black / Black Flange
<b>NRMC3-52</b> = Baffle		<b>30</b> = 3000K	<b>N</b> = Narrow Flood	<b>BW</b> = Black / White Flange
		<b>35</b> = 3500K	<b>F</b> = Flood	<b>BZ</b> = Bronze / Bronze Flange
		<b>40</b> = 4000K		<b>CO</b> = Copper / Copper Flange
				<b>CW</b> = Specular Clear / White Flange
				<b>DD</b> = Diffused Clear / Diffused Flange
				<b>DW</b> = Diffused Clear / White Flange
				<b>HZ</b> = Haze / Haze Flange
				<b>HZW</b> = Haze / White Flange
				<b>MPW</b> = Matte Powder White
				<b>NN</b> = Natural Metal / Natural Metal Flange
				<b>WW</b> = White / White Flange

Available Finishes												
	BB	BW	BZ	CO	CW	DD	DW	HZ	HZW	MPW	NN	WW
<b>51</b>	•	•	•	•	•	•	•	•	•	•	•	•
<b>52</b>	•	•	•	•	•	•	•	•	•	•	•	•

## Optional Accessories

Description
<b>NRA-211SM</b> = Medium base screw-in socket (included)
<b>NRA-212SM</b> = Socket adapter for use with GU24 housings

Example: **NRMC3-51L0930WW** = 5" Marquise III Round Open Retrofit Reflector, 1000lm / 12W, 3000K, White Reflector / White Flange