


APOLLO BY NORA®





APOLLO


3" SPECIFICATION GRADE LUMINAIRES
ROUND OR SQUARE APERTURE
FLANGED / FLANGELESS / WOOD CEILING

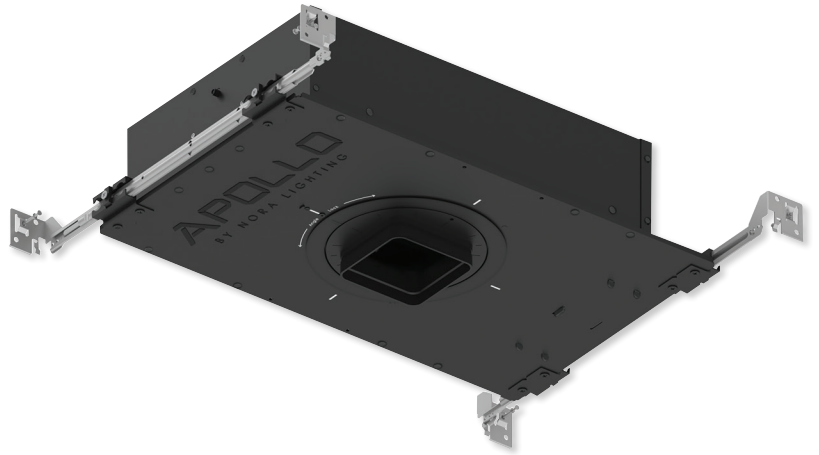

Introducing Apollo - a sleek, three-inch recessed lighting solution that combines cutting-edge COB LED technology with architectural-grade finishes and advanced TIR optics. Available in flanged and trimless options, Apollo is ideal for millwork applications, offering exceptional glare control and a range of versatile dimming protocols. Whether you're illuminating residential or commercial spaces, Apollo ensures a seamless blend of style and performance, with a focus on precision and efficiency.

Detachable Roof

Easy maintenance with above ceiling access

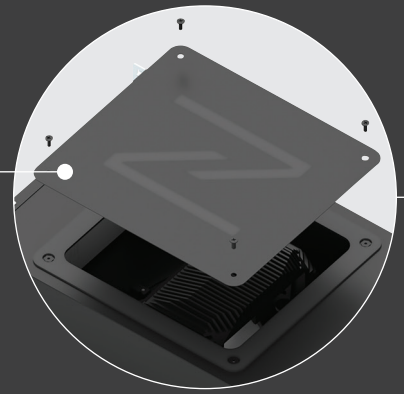

10°

12°

15°

26°

38°


55°

Field Changeable TIR Optics

26° Spot to 55° Narrow Flood
(10° to 15° optics are fixed)



Precise Aiming & Locking
361° Rotation • 45° Tilt

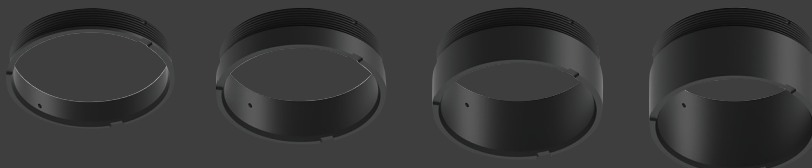

0.5" to 0.875"

0.875" to 1.25"

1.25" to 1.625"

1.625" to 2"

Field Changeable Collars

Accommodates ceiling thickness from 0.5" to 2"



Downlight

Downlight

Pinhole

Pinhole

Wall Wash

Wall Wash

Die-Cast Aluminum Trims

Architectural Grade Finishes with protective e-coating
Flanged or Flangeless (Trimless and Wood Ceiling)

Dimmable down to 0.1%
Phase, 0-10V, Lutron, DALI, Casambi
(Serviceable from below the ceiling)

Extruded Aluminum Heat Sink
with COB LED technology
(Serviceable from below the ceiling)

Romex Strain Relief
Accepts two NM cables




Reinforced Bar Hangers
with two locking positions

Mud Ring
Die-Cast Aluminum with
Knife Edge Appearance

Housing Features


Shallow Housing

Designed for use in ceiling plenums with limited space. Quiet ceiling appearance with 45° visual cut-off to LED Source.

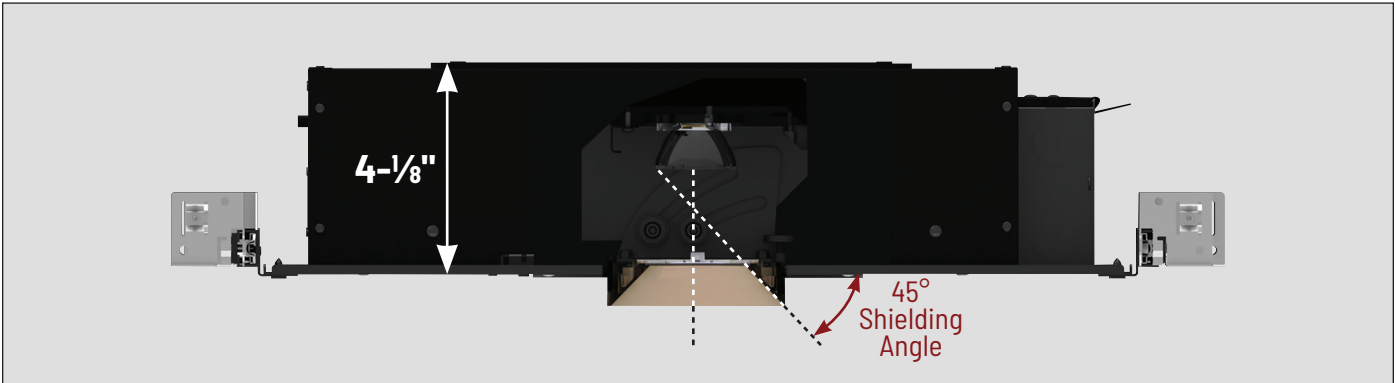


Perfect Alignment

Fine-tuning screw for aligning square collars. Lock housing in place and install ceiling for symmetric appearance.

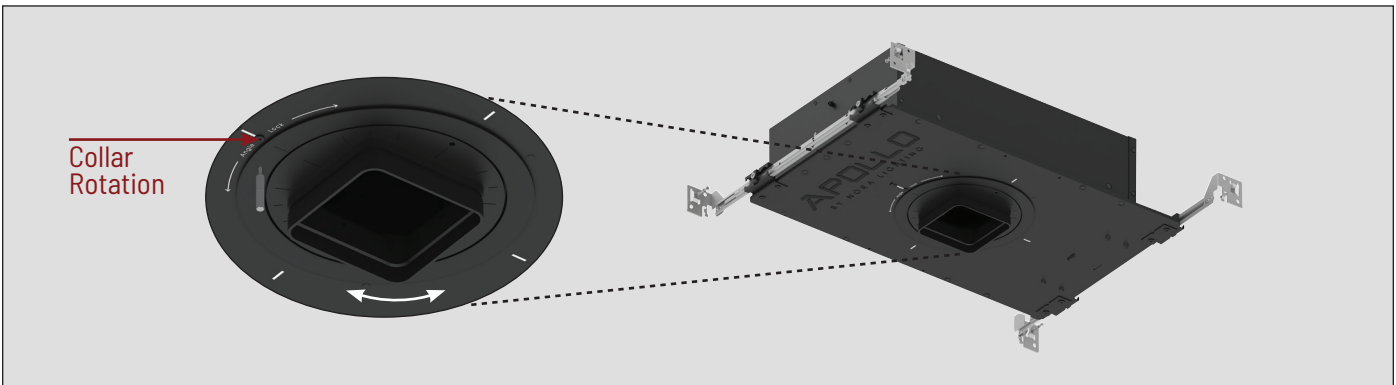

Total Internal Reflection (TIR) Optics


Specify Field changeable (26° to 55°) and Fixed (10° to 15°)

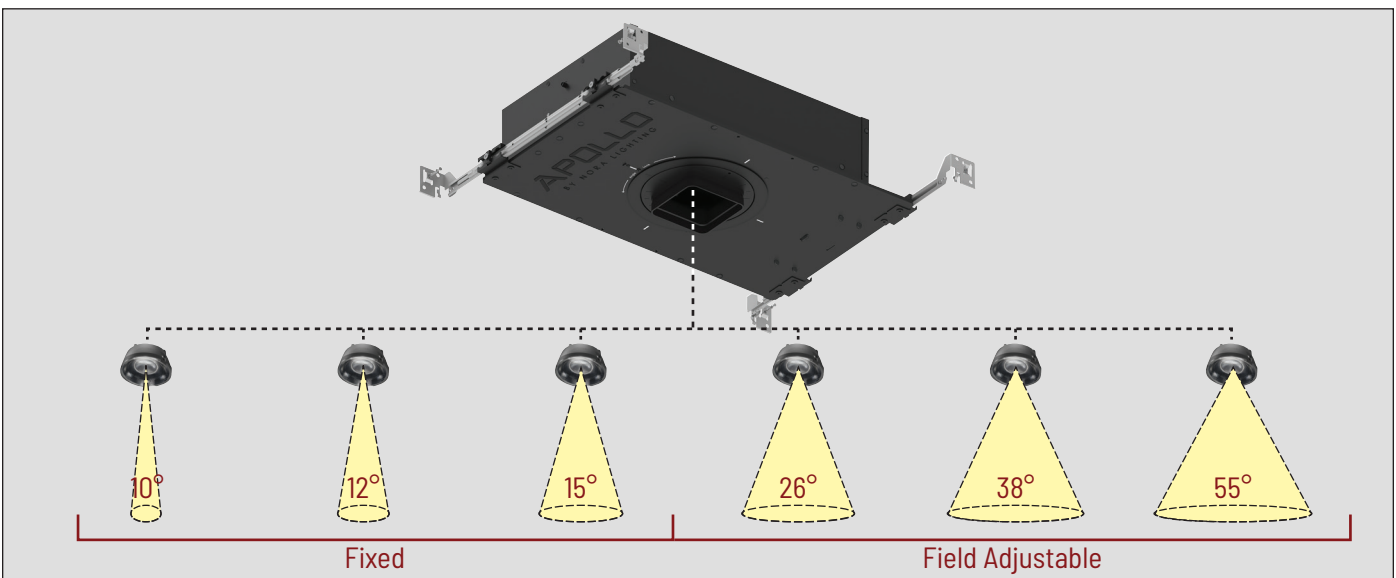

Housing Features

One Housing for Various Ceiling Types

Drywall (Flanged or Trimless) & Wood/Stone/Tile (Flangeless)

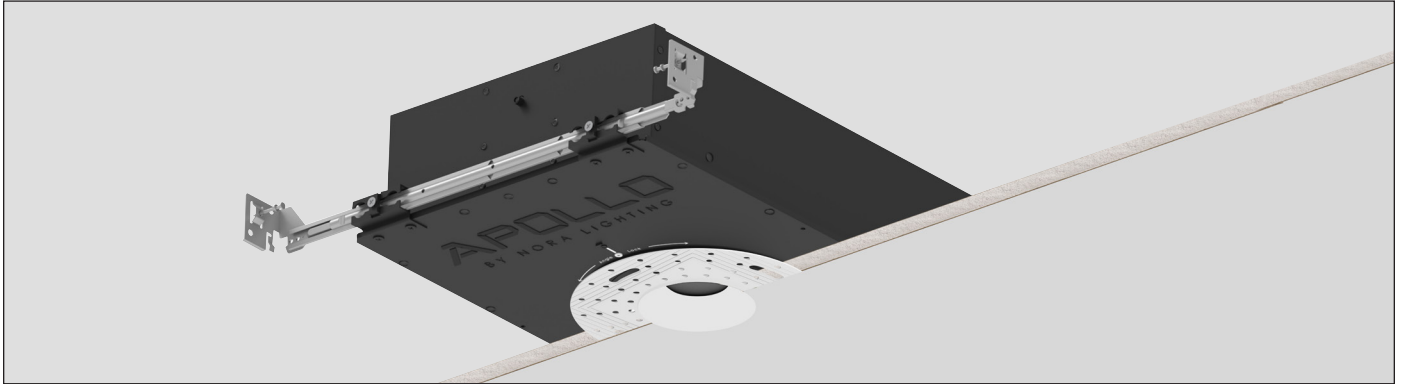

Adjustable LED Mechanism

Tool-Free Locking with 361° horizontal rotation and 45° tilt




45° Tilt

361° Horizontal Rotation

Tool-Free Locking

Serviceability

Accessible from below and above ceiling access

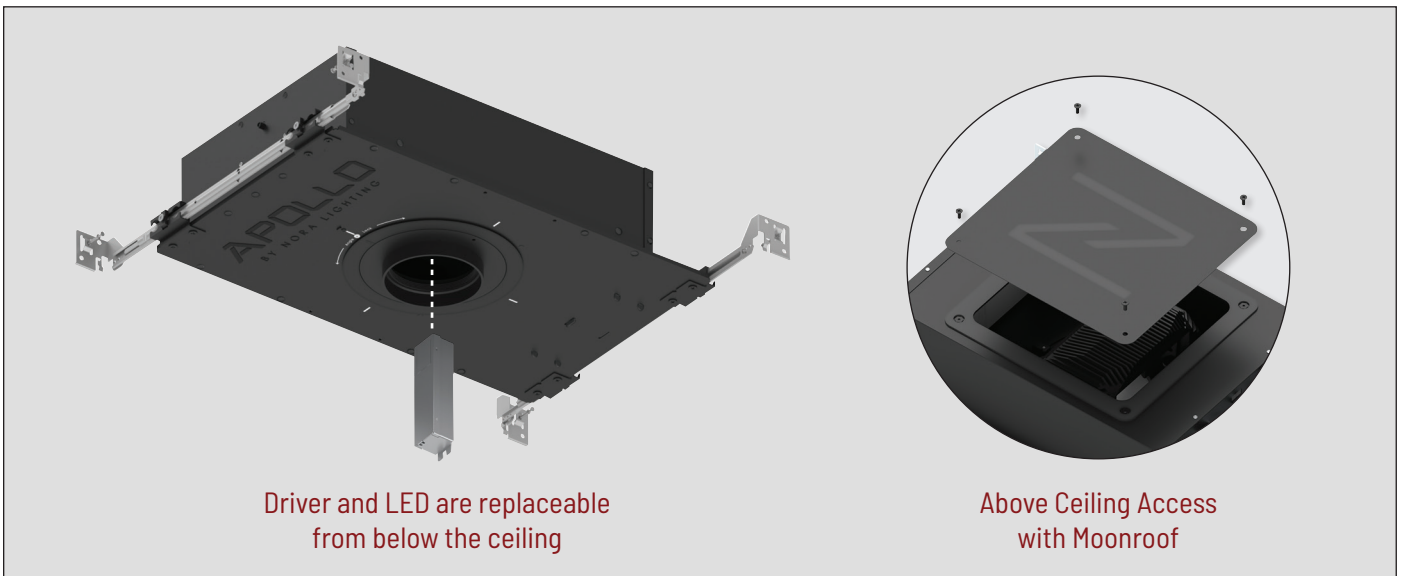

Driver and LED are replaceable from below the ceiling


Above Ceiling Access with Moonroof



Housing Ordering Matrix

A	B	C	D	E	F
Aperture <input type="checkbox"/> NHAPNIC-3R (Round & Fixed Optic) <input type="checkbox"/> NHAPNIC-3S (Square & Fixed Optic)	Ceiling Thickness <input type="checkbox"/> 05 (0.5" to 0.875") <input type="checkbox"/> 10 (0.875" to 1.25") <input type="checkbox"/> 15 (1.25" to 1.625") <input type="checkbox"/> 20 (1.625" to 2")	Lumens / Wattage <input type="checkbox"/> L1 (700lm / 10W) <input type="checkbox"/> L2 (950lm / 20W) <input type="checkbox"/> L3 (1350lm / 23W)	CCT <input type="checkbox"/> 27 (27K) <input type="checkbox"/> 30 (30K) <input type="checkbox"/> 35 (35K) <input type="checkbox"/> 40 (40K)	Beam Spread <input type="checkbox"/> 10D *L1 only* (10° Spot) <input type="checkbox"/> 12D *L2 only* (12° Spot) <input type="checkbox"/> 15D *L3 only* (15° Spot) <input type="checkbox"/> 25D (26° Spot) <input type="checkbox"/> 40D (38° Narrow Flood) <input type="checkbox"/> 55D (55° Flood)	Driver <input type="checkbox"/> P (120V Phase; 3%) <input type="checkbox"/> C (120-277V 0-10V; 1%) <input type="checkbox"/> CO1 *L1, L2 & L3 only* (120-277V 0-10V; 0.1%) <input type="checkbox"/> CAS *L2, L3 & L4 only* (120/277V Casambi; 1%) <input type="checkbox"/> DAL *L2, L3 & L4 only* (120-277V DALI-2; 1%) <input type="checkbox"/> AWNR (120-277V Lutron Athena; 1%) <input type="checkbox"/> LO1 *L1, L2 & L3 only* (120/277V Lutron EcoSystem; 0.1%)
<input type="checkbox"/> NHAPIC-3R (Round & Field Changeable Optic) <input type="checkbox"/> NHAPIC-3S (Square & Field Changeable Optic)	<input type="checkbox"/> 05 (0.5" to 0.875") <input type="checkbox"/> 10 (0.875" to 1.25") <input type="checkbox"/> 15 (1.25" to 1.625") <input type="checkbox"/> 20 (1.625" to 2")	<input type="checkbox"/> L1 (1000lm / 10W) <input type="checkbox"/> L2 (1500lm / 15W) <input type="checkbox"/> L3 (2000lm / 20W) <input type="checkbox"/> L4 (2500lm / 24W)	<input type="checkbox"/> 27 (27K) <input type="checkbox"/> 30 (30K) <input type="checkbox"/> 35 (35K) <input type="checkbox"/> 40 (40K)	<input type="checkbox"/> 25D (26° Spot) <input type="checkbox"/> 40D (38° Narrow Flood) <input type="checkbox"/> 55D (55° Flood)	<input type="checkbox"/> P (120V Phase; 3%) <input type="checkbox"/> C (120-277V 0-10V; 1%) <input type="checkbox"/> CO1 *L1, L2 & L3 only* (120-277V 0-10V; 0.1%) <input type="checkbox"/> CAS *L2, L3 & L4 only* (120/277V Casambi; 1%) <input type="checkbox"/> DAL *L2, L3 & L4 only* (120-277V DALI-2; 1%) <input type="checkbox"/> AWNR (120-277V Lutron Athena; 1%) <input type="checkbox"/> LO1 *L1, L2 & L3 only* (120/277V Lutron EcoSystem; 0.1%)


Scan for info.

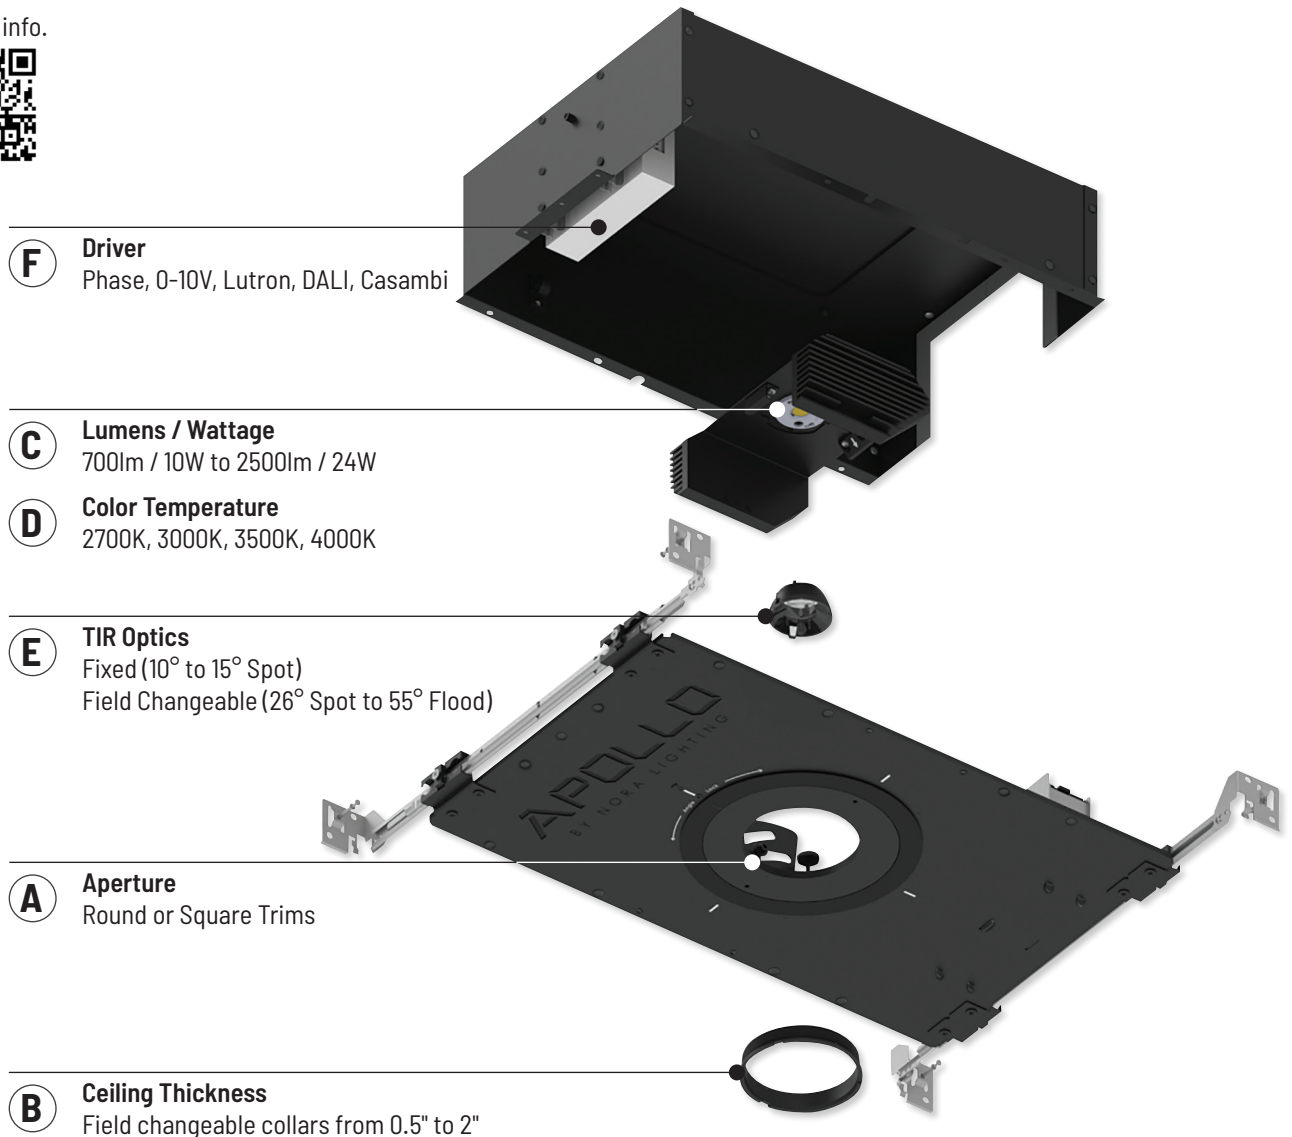

Trim Features


Knife Edge Appearance (Flangeless)

For use in millwork applications or with trimless mud plate

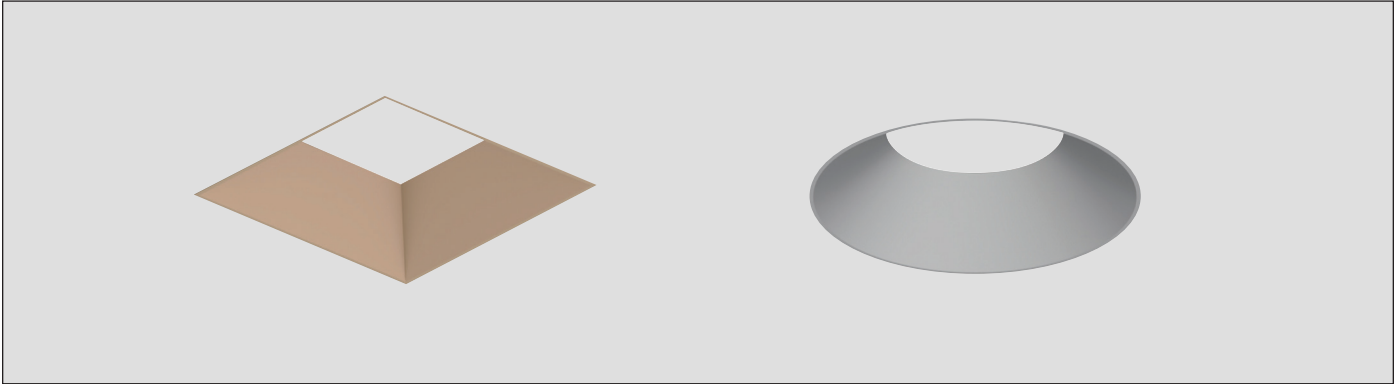


Micro Flange

Precision crafted die-cast aluminum

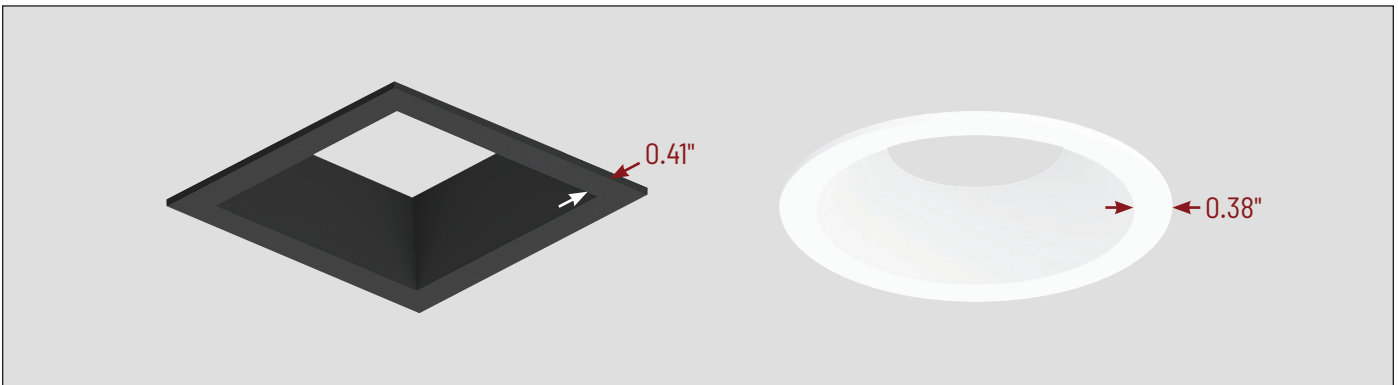

Three Trim Types

Wall Wash, Pinhole and Downlight (all trims are compatible with the adjustable LED mechanism)

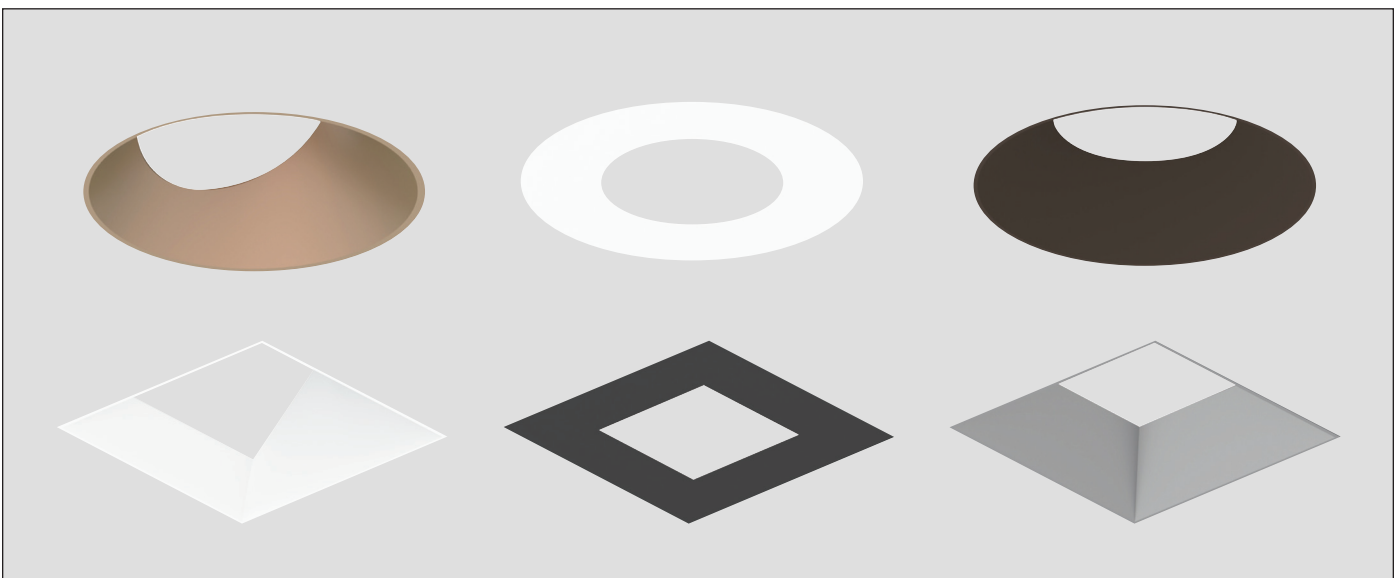

Trim Ordering Matrix

Flange Type

- NAPF** (Flanged)
- NAPT** (Flangless)

Aperture

- 3R** (Round)
- 3S** (Square)


Trim Type

- DN** (Downlight)
- PH** (Pinhole)
- WW** (Wall Wash)


Finish

- B** (Black)
- BZ** (Bronze)
- HZ** (Haze) * *downlight only**
- MPW** (Matte Powder White)
- WD** (Wheat Diffused)


Downlight




NAPF-3RDNB
NAPT-3RDNB




NAPF-3RDNBZ
NAPT-3RDNBZ




NAPF-3RDNHZMPW
NAPT-3RDNHZ




NAPF-3RDNMPW
NAPT-3RDNMPW




NAPF-3RDNWD
NAPT-3RDNWD




NAPF-3SDNB
NAPT-3SDNB




NAPF-3SDNBZ
NAPT-3SDNBZ



NAPF-3SDNHZMPW
NAPT-3SDNHZ




NAPF-3SDNMPW
NAPT-3SDNMPW




NAPF-3SDNWD
NAPT-3SDNWD


Pinhole




NAPF-3RPHB
NAPT-3RPHB




NAPF-3RPHBZ
NAPT-3RPHBZ




NAPF-3RPHMPW
NAPT-3RPHMPW




NAPF-3RPHWD
NAPT-3RPHWD




NAPF-3SPHB
NAPT-3SPHB



NAPF-3SPHBZ
NAPT-3SPHBZ




NAPF-3SPHMPW
NAPT-3SPHMPW




NAPF-3SPHWD
NAPT-3SPHWD


Wall Wash




NAPF-3RWWB
NAPT-3RWWB




NAPF-3RWWBZ
NAPT-3RWWBZ




NAPF-3RWWMPW
NAPT-3RWWMPW




NAPF-3RWWWD
NAPT-3RWWWD




NAPF-3SWWB
NAPT-3SWWB



NAPF-3SWWBZ
NAPT-3SWWBZ



NAPF-3SWWMPW
NAPT-3SWWMPW



NAPF-3SWWWD
NAPT-3SWWWD





(shown with Flanged Downlight)








(shown with Flangeless Pinhole)



NAPF-3RDN
Round Flanged Downlight
(shown with Haze Reflector & Matte Powder White Flange)

3" Round Downlight

Finish

-  Black
-  Matte Powder White
-  Bronze
-  Wheat Diffused
-  Haze







NAPT-3RDN
Round Flangeless Downlight
(shown with Matte Powder White finish)



NAPF-3RPH
Round Flanged Pinhole
(shown with Matte Powder White finish)

3" Round Pinhole

Finish

-  Black
-  Matte Powder White
-  Bronze
-  Wheat Diffused







NAPT-3RPH
Round Flangeless Pinhole
(shown with Bronze finish)




NAPF-3RWW
Round Flanged Wall Wash
(shown with Wheat Diffused finish)

3" Round Wall Wash

Finish

-  Black
-  Matte Powder White
-  Bronze
-  Wheat Diffused



NAPT-3RWW
Round Flangeless Wall Wash
(shown with Black finish)






(shown with Flangeless Downlight)





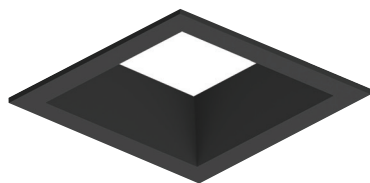


(shown with Flanged Wall Wash)




NAPF-3SDN
Square Flanged Downlight
(shown with Black finish)


3" Square Downlight

Finish

-  Black
-  Matte Powder White
-  Bronze
-  Wheat Diffused
-  Haze





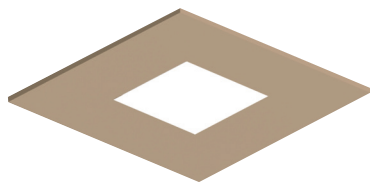

NAPT-3SDN
Square Flangeless Downlight
(shown with Haze finish)



NAPF-3SPH
Square Flanged Pinhole
(shown with Wheat Diffused finish)


3" Square Pinhole

Finish

-  Black
-  Matte Powder White
-  Bronze
-  Wheat Diffused





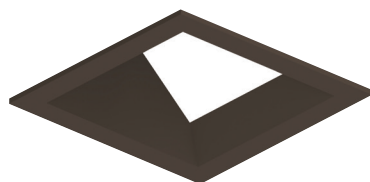

NAPT-3SPH
Square Flangeless Pinhole
(shown with Black finish)



NAPF-3SWW
Square Flanged Wall Wash
(shown with Bronze finish)

3" Square Wall Wash

Finish

-  Black
-  Matte Powder White
-  Bronze
-  Wheat Diffused



NAPT-3SWW
Square Flangeless Wall Wash
(shown with Matte Powder White finish)



NORA LIGHTING, INC.
6505 Gayhart St.
Commerce, CA 90040
TEL 323.767.2600
FAX 323.722.3677
www.NoraLighting.com

DOMESTIC FACILITIES:

Cincinnati, OH
Dallas, TX
Detroit, MI
Edison, NJ
Los Angeles, CA
Minneapolis, MN
Nashville, TN

INTERNATIONAL SALES:

6505 Gayhart St.
Commerce, CA 90040
TEL 323.767.2600
FAX 323.722.3677

The products shown in this catalog
are covered by USA and International
patents. Specifications subject to
change without notice.

© Copyright 2025 Nora Lighting, Inc.
All rights reserved

7M ML-APOLLOC0425

