NLOPAC-R6REGT24TW

6" Regressed AC Opal LED Surface Mount with Selectable CCT
Source: 11W LED
Up to 1050lm

Type	
Project	
Catalog No.	070725P1
Notes	

PRODUCT DESCRIPTION

Regressed AC Opal Series fixture is designed to surface mount over a standard junction box. Luminaires include a selectable color temperature switch located under the lens to change the color temperature without removing the fixture. The regressed light source gives the appearance of a recessed luminaire.

FEATURES

- Recessed appearance
- AC LED (No Driver)
- Five color temperatures in each fixture (2700K / 3000K / 3500K / 4000K / 5000K)
- Can be used with recessed housings when used with optional retrofit kit
- cETLus Listed for Wet Locations
- Certified to the high efficacy requirements of California Title 24 JA8-2022
- Suitable for use in closets

SPECIFICATION

Construction: One piece die-cast aluminum formed luminaire. Aluminum body dissipates heat and extends life.

Mounting: Surface mount luminaire is compatible with 3" or 4" junction boxes and ½" deep pancake boxes. Luminaires can also be mounted on 5" or 6" recessed housings using optional torsion spring kit (NLOPAC-R6TWRECKIT).

Ratings: IC rated when used with 3" or 4" electrical junction box rated for direct contact with insulation. Fire rated when used with a fire rated junction box.

ELECTRICAL

Input Voltage: 120V
Input Frequency: 60Hz
Lumens / Wattage: Up to 1050lm / 11W
**Color Temperature:** Selectable CCT: 2700K / 3000K / 3500K / 4000K / 5000K (Note: Preset to 3000K)
Color Rendering Index: 90+ CRI
Operating temperature: -20°C to 40°C
Dimming: Triac/ELV

OPTIONAL ACCESSORY

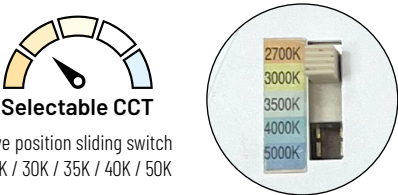**NLOPAC-R6TWRECKIT:** Retrofit Kit for use with 5" or 6" recessed housings

LISTING

- cETLus Listed for Wet Locations
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2022
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1).
- FCC Compliant

PRODUCT IMAGES AND DIMENSIONS

Selectable CCT
Five position sliding switch
27K / 30K / 35K / 40K / 50K

2700K
3000K
3500K
4000K
5000K

1-1/8"
7-1/2"
5-5/8"

6" Regressed AC Opal LED Surface Mount with Selectable CCT

Description
NLOPAC-R6REGT24TWW = White Finish

Optional Accessory

Description
NLOPAC-R6TWRECKIT = Retrofit Kit for 5" or 6" Recessed Housings

Example: NLOPAC-R6REGT24TWW = 6" Regressed AC Opal LED Surface Mount, Selectable CCT, White Finish